



Altronix®

2018-19 PRODUCT GUIDE

Merging infrastructure with emerging technology.

SECURITY / ACCESS / FIRE / SURVEILLANCE

Merging infrastructure with emerging technology.™

The global leader in power and data transmission solutions for professional Security, Surveillance, Access and Fire applications, Altronix designs and manufactures innovative solutions that integrate Fiber, Ethernet (CAT5/6), UTP and Coax infrastructure – while providing PoE for IP devices.

Our comprehensive line of power products and peripherals also offer remote network management capabilities to ensure your system is up and running at optimal levels. Altronix products feature the quality, reliability and unparalleled customer support that have been associated with us for over 35 years.

MADE IN THE U.S.A. / LIFETIME WARRANTY

TABLE OF CONTENTS

access power supply/chargers

300 Series	70-71
400 Series	72-73
600 Series	74-75
1012 Series	23-24
1024 Series	76-77
Access Control Accessories	44-45
Access Power Controllers w/Power Supply Chargers (UL) ..	30-31
Distributed Control Panel Power Units	60
eFlow - Enhanced Power Supply/Chargers	20-21, 63-69
eFlow - Enhanced Access Power Controllers	36-37
Maximal - Enhanced Access Power Controllers	38-39
Maximal - Enhanced Expandable Power Systems	40-41
Maximal - Rack Mount Access Power Controllers	42
Off-line Switching (UL)	19
Power Supply/Chargers with Fire Alarm Interface (UL) ..	27, 79
Single Output Power Supply/Chargers	22
Strikelt - Panic Device Power Controllers	59
Switch Mode Power Supply/Chargers (UL)	18
Triple Voltage Output (UL)	61
Two (2) Output Switching (UL)	25-26

access power / accessory modules

Access Power Controllers	28-29, 45
Entrada - FACP Adapters for Network IP Door Controllers ..	80
LINQ - Network Communication / Distribution Modules ..	33-35
Power Distribution Module with Fire Alarm Interface	78
Power Distribution Modules	170-171

access power & integration

Trove - Enclosures and Backplanes	46-58
---	-------

surveillance

AC Power Supplies	130-134
Combination AC/DC Power Supplies	136
DC Power Supplies	137-140
eBridge - Ethernet Over Coax Solutions	89-100
HubSat - UTP Transceiver Hubs	128
HubWay - UTP Transceiver Hubs	120-127
HubWay - Video Balun/Combiners	129
Isolated Rack Mount AC Power Supplies	157
Isolated AC Power Supplies	135
NetWay - Power Over the Ethernet	112-119
NetWay Spectrum - Fiber Solutions	102-111
Outdoor AC Power Supplies	141-142
Pace - Long Range Ethernet	85-88
Rack Mount AC & Isolated Power Supplies	155-157
Rack Mount DC Power Supplies	158-159
ReServ - Video Surveillance UPS	143-144
Sav - DC Power Supplies	139-140
VertiLine - 56V Power Supply/Charger	101
VertiLine - Rack Mount Power Supplies	150-154
WayPoint - Outdoor AC/DC Power Supplies	145-148

fire power

FireSwitch - Networked NAC Power Extenders	82
NAC Power Extenders	83-84

TABLE OF CONTENTS

fire alarm power supply/chargers

300 Series	70-71
400 Series	72-73
600 Series	74-75
1024 Series	76-77
eFlow - Enhanced Power Supply/Chargers	20-21, 63-69
Off-line Switching (UL)	19
Power Supply/Chargers with Fire Alarm Interface (UL) . . .	27, 79
Switch Mode Power Supply/Chargers (UL)	18
Triple Voltage Output (UL)	61

general purpose power supply/chargers

Linear	6-7
Siren Drivers	17
Supervised Linear	8
Supervised Off-line Switching	13
Supervised Switch Mode	11-12
Switch Mode	9-10

relays/timers

Annual Event Timers	162
Door Timers	164
Multi-function Timers	163
Relay Modules	165-167
Tempo2 - Universal Two Stage Timer	161

din rail products

DIN Rail Mounting Accessories	177
Power Distribution Modules	168
Power Supply/Chargers	168
Relays with Base	165
Timers	169

automation/accessories

Low Power Disconnect Module	16
Outdoor Pole Mount Kit	149, 175
Power Conversion Modules	
Voltage Boosters	16
Voltage Regulators	15, 44
Batteries	176
Component Accessories	176-177
Power Distribution Modules	170-171
Power Supply/Battery/Accessory Enclosures	174-175
AC Transformers	172-173

Agency Listing Glossary	178
Altronix Manufacturers Reps	182-183
Lifetime Warranty	184
Product Shipping Weights	179-181
Product Index	185-187

LINEAR POWER SUPPLY/CHARGERS

Power Supply Board

AL624

- 1.2 amp @ 6VDC/12VDC or 0.75 amp @ 24VDC.
 - 12, 16 or 24VAC input
(refer to Transformer Pg. 170).
- Board dimensions: 3"L x 2.5"W x 1.5"H

Power Supply with Enclosure

AL624E

- 1.2 amp @ 6VDC/12VDC or 0.75 amp @ 24VDC.
 - 12, 16 or 24VAC input
(refer to Transformer Pg. 170).
 - Fits one (1) 12VDC/7AH or two (2) 12VDC/4AH batteries.
- Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

Features:

- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- PTC battery protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Automatic switch over to stand-by battery when AC fails.
- AC input and DC output LED indicators.
- Includes battery leads.

Power Supply Kits

AL62412C

- 1.2 amp @ 12VDC.
- Kit includes: one (1) AL624, one (1) 12VDC/4AH rechargeable battery, one (1) 16.5VAC/20VA Class 2 Rated plug-in transformer.

AL62412CX

- 1.2 amp @ 12VDC.
- Kit includes: one (1) AL624, one (1) 12VDC/7AH rechargeable battery, one (1) 16.5VAC/20VA Class 2 Rated plug-in transformer.

AL62424C

- 0.75 amp @ 24VDC.
- Kit includes: one (1) AL624, two (2) 12VDC/4AH rechargeable batteries, one (1) 24VAC/40VA Class 2 Rated plug-in transformer.



LINEAR POWER SUPPLY/CHARGERS

Power Supply Board

LPS3

- 2.5 amp @ 12VDC or 24VDC.
 - 16 or 24VAC input
(refer to Transformer Pg. 170).
- Board dimensions: 4"L x 6.5"W x 2"H

Power Supply with Enclosure

LPS3C12X

- 2.5 amp @ 12VDC.
 - Includes transformer and cam lock.
 - Fits two (2) 12VDC/12AH batteries.
- Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

Power Supply with Enclosure

LPS3C24X

- 2.5 amp @ 24VDC.
 - Includes transformer and cam lock.
 - Fits two (2) 12VDC/12AH batteries.
- Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

LPS5C12X

- 3.5 amp @ 12VDC.
 - AC fail and low battery supervision.
 - Includes transformer and cam lock.
 - Fits two (2) 12VDC/7AH batteries.
- Enclosure dimensions: 13.5"H x 13"W x 3.25"D

LPS5C24X

- 3.5 amp @ 24VDC.
 - AC fail and low battery supervision.
 - Includes transformer and cam lock.
 - Fits two (2) 12VDC/7AH batteries.
- Enclosure dimensions: 13.5"H x 13"W x 3.25"D

Power Supply with Outdoor Enclosure

LPS3WP12

- 2.5 amp @ 12VDC.
 - NEMA 4/IP65 Rated enclosure for outdoor use.
 - Includes transformer.
- Enclosure dimensions: 12"H x 8"W x 6"D

LPS3WP24

- 2.5 amp @ 24VDC.
 - NEMA 4/IP65 Rated enclosure for outdoor use.
 - Includes transformer.
- Enclosure dimensions: 12"H x 8"W x 6"D

PMK1 - Pole Mount Kit available, see page 149

Features:

- 115VAC 50/60Hz input (excludes LPS3).
- 5 amp on demand (LPS5C12X and LPS5C24X - 8 amp on demand).
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Fused battery protection (PTC available).
- Built-in charger for sealed lead acid or gel type batteries.
- Automatic switch over to stand-by battery when AC fails.
- AC input and DC output LED indicators
- Includes battery leads.

SUPERVISED LINEAR POWER SUPPLY/CHARGERS

LPS3AC

- 2.5 amp @ 12VDC or 24VDC.
 - 5 amp on demand.
 - AC fail supervision.
 - Fused battery protection (PTC available).
 - 16 or 24VAC input
- (refer to Transformer Pg. 172).*

Board dimensions:
4"L x 6.5"W x 2"H

PM212

- 1 amp @ 12VDC.
 - AC fail supervision.
 - PTC battery protection.
 - AC fail and low battery supervision.
 - 16VAC input
- (refer to Transformer Pg. 172).*

Board dimensions:
5.25"L x 2.75"W x 1.5"H

PM224


- 0.75 amp @ 24VDC.
 - AC fail supervision.
 - PTC battery protection.
 - AC fail and low battery supervision.
 - 24VAC input
- (refer to Transformer Pg. 172).*

Board dimensions:
5.25"L x 2.75"W x 1.5"H

8

Features:

- Filtered and electronically regulated output.
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Automatic switch over to stand-by battery when AC fails.
- AC input and DC output LED indicators.
- Includes battery leads.

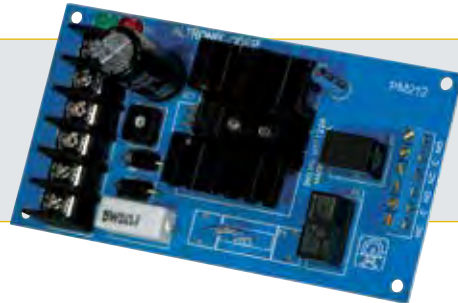

PM212

SWITCH MODE POWER SUPPLY/CHARGERS

Power Supply Board

SMP3

- 2.5 amp @ 6VDC, 12VDC or 24VDC.
- 12 to 28VAC input
(refer to Transformer Pg. 170).

Board dimensions: 3.5"L x 3"W x 2"H

Power Supply with Enclosure

SMP3E

- 2.5 amp @ 6VDC, 12VDC or 24VDC.
- 12 to 28VAC input
(refer to Transformer Pg. 170).
- Fits one (1) 12VDC/7AH or
two (2) 12VDC/4AH batteries.

Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

SMP312C

- 2.5 amp @ 12VDC.
- Kit includes: one (1) SMP3,
one (1) 12VDC/4AH rechargeable battery &
one (1) 16.5VAC/40VA Class 2 Rated
plug-in transformer.

Power Supply Kit

SMP312CX

- 2.5 amp @ 12VDC.
- Kit includes one (1) SMP3,
one (1) 12VDC/7AH rechargeable battery &
one (1) 16.5VAC/40VA Class 2 Rated
plug-in transformer.



Features:

- CE Approved.
- Filtered and electronically regulated output.
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Automatic switch over to stand-by battery when AC fails.
- AC input and DC output LED indicators.
- Includes battery leads.

SWITCH MODE POWER SUPPLY/CHARGERS

*Power Supply Board***SMP5**

- 4 amp @ 6VDC, 12VDC or 24VDC.
- 12 to 28VAC input
(refer to Transformer Pg. 172).

Board dimensions: 3.5"L x 2.75"W x 1.75"H

SMP7

- 6 amp @ 12VDC or 24VDC.
- 16 to 28VAC input
(refer to Transformer Pg. 172).

Board dimensions: 7"L x 4.25"W x 1.75"H

SMP10

- 10 amp @ 12VDC or 24VDC.
- 16 to 28VAC input
(refer to Transformer Pg. 172).

Board dimensions: 7"L x 4.25"W x 2.3"H

*Power Supply with Enclosure***SMP7CTX**

- 115VAC 50/60Hz. input
- 6 amp @ 12VDC or 24VDC.
- Includes transformer and cam lock.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:
13.5"H x 13"W x 3.25"D

SMP10C12X

- 115VAC 50/60Hz. input
- 10 amp @ 12VDC.
- Includes transformer and cam lock.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:
13.5"H x 13"W x 3.25"D

SMP10C24X


- 115VAC 50/60Hz. input
- 10 amp @ 24VDC.
- Includes transformer and cam lock.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions:
15.5"H x 12.23"W x 4.5"D

10

Features:

- CE Approved.
- Filtered and electronically regulated output.
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup (excludes SMP5).
- Automatic switch over to stand-by battery when AC fails.
- AC input and DC output LED indicators.
- Includes battery leads.

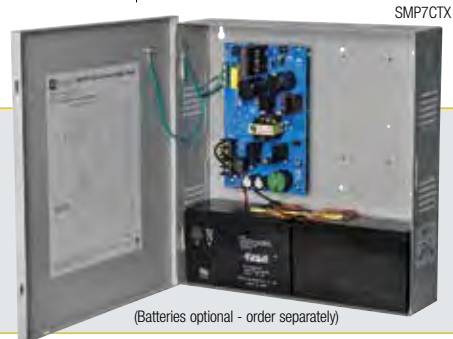

(Batteries optional - order separately)

SUPERVISED SWITCH MODE POWER SUPPLY/CHARGERS

SMP3PM

- 2.5 amp @ 12VDC or 24VDC.
- AC fail and low battery supervision.
- 16 to 28VAC input

(refer to Transformer Pg. 172).

Board dimensions: 7"L x 4"W x 1.5"H

SMP5PM

- 4 amp @ 12VDC or 24VDC.
- AC fail and low battery supervision.
- 24 or 28VAC input

(refer to Transformer Pg. 172).

Board dimensions: 7"L x 4"W x 1.55"H

SMP7PM

- 6 amp @ 12VDC or 24VDC.
- AC fail, low battery and battery presence supervision.
- 24 or 28VAC input

(refer to Transformer Pg. 172).

Board dimensions: 7"L x 4"W x 1.5"H

SMP10PM

- 10 amp @ 12VDC or 24VDC.
- AC fail, low battery and battery presence supervision.
- 24 or 28VAC input

(refer to Transformer Pg. 172).

Board dimensions: 7"L x 4"W x 2"H

Features:

- CE Approved.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.



SMP5PM

SUPERVISED SWITCH MODE POWER SUPPLY/CHARGERS WITH ENCLOSURE

SMP3PMCTX

- Universal 115/230VAC input.
- 2.5 amp @ 12VDC or 24VDC.
- AC fail and low battery supervision.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:

13.5"H x 13"W x 3.25"D

SMP5PMCTX

- Universal 115/230VAC input.
- 4 amp @ 12VDC or 24VDC.
- AC fail and low battery supervision.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:

13.5"H x 13"W x 3.25"D

SMP7PMCTX

- 115VAC input.
- 6 amp @ 12VDC or 24VDC.
- AC fail and low battery supervision.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:

13.5"H x 13"W x 3.25"D

SMP10PMC12X

- 115VAC input.
- 10 amp @ 12VDC.
- AC fail and low battery supervision.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:

13.5"H x 13"W x 3.25"D

SMP10PMC24X

- 115VAC input.
- 10 amp @ 24VDC.
- AC fail and low battery supervision.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:

13.5"H x 13"W x 3.25"D

Units available with power distribution modules installed - four (4), eight (8) or sixteen (16) fuse or PTC protected outputs.

12

Features:

- CE Approved.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.



SUPERVISED OFF-LINE SWITCHING POWER SUPPLY/CHARGERS

OLS20

- 115VAC input.
 - 1 amp @ 12VDC or 0.5 amp @ 24VDC.
 - This model is not supervised.
- Board dimensions: 3.1"L x 2.6"W x 1.3"H

OLS75

- Universal 115/230VAC input.
 - 2.5 amp @ 12VDC or 24VDC.
- Board dimensions:
7.5"L x 4.125"W x 2.125"H

OLS120

- Universal 115/230VAC input.
 - 4 amp @ 12VDC or 24VDC.
- Board dimensions: 7.25"L x 4.5"W x 1.75"H

OLS180

- CE Approved.
 - 115VAC input.
 - 6 amp @ 12VDC or 24VDC.
- Board dimensions: 8.1"L x 4.1"W x 2.125"H

OLS180-220

- OLS180 with 220VAC input.

OLS200

- CE Approved.
 - 115VAC input.
 - 10 amp @ 12VDC.
- Board dimensions: 7.25"L x 4.5"W x 2"H

OLS200-220

- OLS200 with 220VAC input.

OLS250

- CE Approved.
 - 115VAC input.
 - 10 amp @ 24VDC.
- Board dimensions: 7.25"L x 4.5"W x 2"H

OLS250-220

- OLS250 with 220VAC input.

OLS350

- CE Approved.
 - 115VAC input.
 - 12 amp @ 24VDC.
- Board dimensions: 7.5"L x 4.5"W x 1.75"H

OLS350-220

- OLS350 with 220VAC input.



OLS250

Features:

- AC fail and low battery supervision (excludes OLS20).
- Built-in transformer.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Automatic switch over to stand-by battery when AC fails.
- Zero voltage drop upon transfer to battery backup.
- AC input and DC output LED indicators.
- Includes battery leads.

DUAL OUTPUT OFF-LINE SWITCHING POWER SUPPLY/CHARGERS

OLS120D2

- Universal 115/230VAC input.
- Output Options:
 - 24VDC @ 3 amp [DC1]
 - 12VDC @ 1 amp [DC2]
 - DC1: 12/24VDC @ 4 amp (if DC2 is not used)

Board dimensions: 7.25"L x 4.5"W x 1.75"H



OLS120D2

OLS120D2X

- OLS120D2 in enclosure.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:
13.5"H x 13"W x 3.25"D



OLS120D2X

14

Features:

- AC fail and low battery supervision.
- Built-in transformer.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Automatic switch over to stand-by battery when AC fails.
- Zero voltage drop upon transfer to battery backup.
- AC input and DC output LED indicators.
- Includes battery leads.

POWER CONVERSION MODULES

Voltage Regulators

VR1T

- Converts a 24VAC or 24VDC input into a regulated 12VDC output.
- 1 amp of continuous supply current output.
- Spring terminal blocks.

VR1TM5

- Converts a 24VAC or 24VDC input into a regulated 5VDC output.
- 1 amp of continuous supply current output.
- Spring terminal blocks.

VR2T

- Converts a 24VAC or 24VDC input into a regulated 12VDC output.
- 0.5 amp of continuous supply current output.
- Spring terminal blocks.

VR3T

- Converts a 24VDC input into a regulated 12VDC output.
- 2 amp of continuous supply current output.
- Screw terminal block (removable).

Features:

- CE Approved.
- Built-in overload protection.
- Electronically filtered and regulated output.
- Power LED indicator.
- Compensates for voltage drop due to long wire runs.
- High impact insulated housing.
- Compact design allows for integration in a wide range of camera housings.



VR1T



VR4T

- Converts a 24VDC input into a regulated 12VDC output.
- 3 amp of continuous supply current output.
- Screw terminal block (removable).



VR5BT

VR5T

- Converts a 24VAC or 24VDC input into a regulated 12VDC output.
- 3 amp of continuous supply current output.
- Spring terminal blocks.
- Screw mounting.

VR5BT

VR5T w/Built-in charger for sealed lead acid or gel type batteries.

VR6

- Converts a 24VDC input into a regulated 5VDC or 12VDC output.
- Input: 24VDC @ 1.75A
– Output: 5VDC @ 6A
- Input: 24VDC @ 3.5A
– Output: 12VDC @ 6A
- Surge suppression.
- VR6 reduces the cost of adding another power supply.
- Stackable mounting configuration saves valuable enclosure space.
- ACMS8/PDS8 are designed to piggyback onto the VR6 making an instant plug-in connection via common standoffs.



VR6

PDS8

POWER CONVERSION MODULES

*Voltage Boosters***VB1**

- Converts a 12VDC-24VDC input into a regulated 24VDC output.
- 0.75 amp of continuous supply current output.
- Modular connector/cable assembly.

VB1T

- Converts a 12VDC-24VDC input into a regulated 24VDC output.
- 0.75 amp of continuous supply current output.
- Screw terminals.



VB1T

Features:

- CE Approved.
- Built-in overload protection.
- Electronically filtered and regulated output.
- Power LED indicator.
- Compensates for voltage drop due to long wire runs.
- High impact insulated housing.
- Compact design allows for integration in a wide range of camera housings.

Voltage Booster applications:

- Power for 24VDC Access Control devices from a 12VDC power source.

16

LOW POWER DISCONNECT MODULE

LPD

- Low voltage cutoff:
12VDC - 10.5 volts (+/- .3 volts)
24VDC - 20 volts (+/- .3 volts).
 - Restore voltage threshold:
12VDC - 11.5 volts (+/- .3 volts)
24VDC - 23 volts (+/- .3 volts).
 - 12VDC or 24VDC input.
- Board dimensions: 2.75"L x 2.2"W x 1"H

LPD applications:

- Security, access control, etc.



LPD

SIREN DRIVERS

ALSD1

- 6VDC or 12VDC operation.
- Parallel or series speaker wiring:
 - 113 db @ 10ft. @ 6 volts - 8 Ohms
 - 115 db @ 10ft. @ 6 volts - 4 Ohms
 - 116 db @ 10ft. @ 12 volts - 8 Ohms
 - 120 db @ 10ft. @ 12 volts - 4 Ohms
- Current draw range from .5 amp to 1.8 amp based on speaker resistance and supply voltage.

Board dimensions: 2.75"L x 1.75"W x 1.1"H

ALSD2

- 6VDC or 12VDC operation.
- Parallel or series speaker wiring:
 - 103 db @ 10 ft. @ 6 volts - 8 Ohms
 - 105 db @ 10 ft. @ 6 volts - 4 Ohms
 - 106 db @ 10 ft. @ 12 volts - 8 Ohms
 - 111 db @ 10 ft. @ 12 volts - 4 Ohms
- Current draw range from .3 amp to 1.22 amp based on speaker resistance and supply voltage.

Board dimensions: 1.75"L x 2.75"W x 1.1"H

Features:

- Two (2) channel operation (steady or yelp).
- High output.
- Very low current draw.



ALSD1



ALSD2

SWITCH MODE POWER SUPPLY/CHARGERS

AL125ULB

- UL Recognized for Access.
- 1 amp @ 12VDC or 24VDC.
- Two (2) Class 2 Rated power-limited outputs.
 - One (1) Fail-Safe/Fail-Secure lock output (switched).
 - One (1) auxiliary power output (unswitched).
- Access Control trigger input.
- Supervised Fire Alarm Disconnect (latching with reset or non-latching).
- AC fail supervision.
- 24VAC input (*transformer required*).

Board dimensions: 3.1"L x 3.9"W x 1.4"H

18 **AL175ULB**

- UL Recognized for Access.
- 1.75 amp @ 12VDC or 24VDC.
- Two (2) Class 2 Rated power-limited outputs.
 - One (1) Fail-Safe/Fail-Secure lock output (switched).
 - One (1) auxiliary power output (unswitched).
- Dry trigger Fire Alarm disconnect/Access Control input.
- Aux. relay output.
- AC fail supervision.
- 28VAC input (*transformer required*).

Board dimensions: 3.1"L x 5.8"W x 1.5"H

AL176ULB

- UL Recognized for Access.
- 1.75 amp @ 12VDC or 24VDC.
- Class 2 Rated power-limited output.
- AC fail and low battery supervision.
- 28VAC input.

Board dimensions: 3.1"L x 5.3"W x 1.4"H

AL400ULB

- UL Recognized for Access, Burglar Alarm, Nurse Call and Fire.
- 4 amp @ 12VDC or 3 amp @ 24VDC.
- Class 2 Rated power-limited output.
- AC fail, and low battery supervision.
- 24 or 28VAC input (*transformer required*).

Board dimensions: 4.1"L x 7.1"W x 1.75"H

AL600ULB

- UL Recognized for Access and Fire.
- 6 amp @ 12VDC or 24VDC.
- non power-limited output.
- AC fail, low battery and battery presence supervision.
- Two (2) 28VAC inputs (*transformer required*).

Board dimensions:

4.3"L x 7.1"W x 2.3"H

Features:

- 115VAC 60Hz. input.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC input and DC output LED indicators.
- Includes battery leads.



AL175ULB

OFF-LINE SWITCHING POWER SUPPLY/CHARGERS

AL300ULXB2

- UL Recognized for Access, Burglar Alarms, Nurse Call and Fire.
- 2.5 amp @ 12VDC or 24VDC.
- Class 2 Rated power-limited output.

Board dimensions: 4.5"L x 7.1"W x 1.44"H

AL400ULXB2

- UL Listed Sub-Assembly in the U.S. for Access, Burglar Alarm, Nurse Call and Fire, UL Listed Sub-Assembly in Canada for Access.
- 4 amp @ 12VDC or 3 amp @ 24VDC.
- Class 2 Rated power-limited output.

Board dimensions: 4.5"L x 7.1"W x 1.44"H

AL600ULXB

- UL Listed Sub-Assembly in the U.S. for Access, Burglar Alarm and Fire, UL Listed Sub-Assembly in Canada for Access.
- 6 amp @ 12VDC or 24VDC.
- Non power-limited output.

Board dimensions: 4.5"L x 7.8"W x 2.15"H

AL1012ULXB

- UL Listed Sub-Assembly in the U.S. and Canada for Access.
- 10 amp @ 12VDC.
- Non power-limited output.

Board dimensions: 5.1"L x 7.25"W x 1.75"H

AL1024ULXB2

- UL Listed Sub-Assembly in the U.S. for Access, Burglar Alarm and Fire, UL Listed Sub-Assembly in Canada for Access.
- Access Control Applications:
10 amp @ 24VDC

Fire Alarm Applications:
8 amp @ 24VDC continuous
with 10 amp during alarm.

- Non power-limited output.
- Board dimensions: 4.5"L x 8.25"W x 1.5"H

Features:

- 115VAC 60Hz. input.
- Built-in transformer.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC fail, low battery and battery presence supervision.
- AC input and DC output LED indicators.
- Includes battery leads.



AL400ULXB2



ENHANCED POWER SUPPLY/CHARGERS

eFlow3NB

- UL Recognized in the U.S. and Canada for Access Control and Burglar. UL Recognized in the U.S. for Fire.
 - Two (2) 12VDC or 24VDC Class 2 Rated power-limited outputs:
 - Switched main (affected by fire alarm)
 - Unswitched aux. (continuous power)
 - 2 amp total supply current.
- Board dimensions: 4.63"L x 7.5"W x 1.6"H

eFlow4NB

- UL Listed Sub-Assembly in the U.S. and Canada for Access Control and Burglar. UL Listed Sub-Assembly in the U.S. for Fire.
 - Two (2) 12VDC or 24VDC Class 2 Rated power-limited outputs:
 - Switched main (affected by fire alarm)
 - Unswitched aux. (continuous power)
 - 4 amp total supply current.
- Board dimensions: 4.63"L x 7.5"W x 1.6"H


eFlow6NB

- UL Listed Sub-Assembly in the U.S. and Canada for Access Control and Burglar. UL Listed Sub-Assembly in the U.S. for Fire.
 - Two (2) 12VDC or 24VDC power outputs
 - Switched main (affected by fire alarm)
 - Unswitched aux. (continuous power)
 - 6 amp total supply current.
- Board dimensions: 4.63"L x 7.5"W x 1.6"H

20

Features:

- 120VAC 60Hz. input.
- Additional aux. power-limited output rated @ 1 amp (unswitched).
- Over voltage protection.
- Supervised Fire Alarm disconnect (latching or non-latching).
- Low power cutoff - protects stand-by batteries from deep discharge.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC fail, low battery and battery presence supervision.

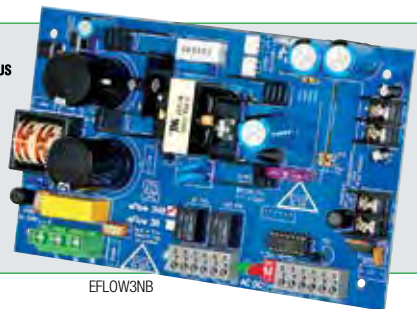

EFLOW3NB

* Above models available mounted in enclosure - refer to pgs. 63-65 for further info.

Monitor and control eFlow Series Power Supply/Chargers with LINQ2 - Network Communication Modules (pg. 34)



ENHANCED POWER SUPPLY/CHARGERS

eFlow102NB

- UL Listed Sub-Assembly in the U.S. and Canada for Access Control.
- Two (2) 12VDC power outputs
 - Switched main (affected by fire alarm)
 - Unswitched aux. (continuous power)
- 10 amp total supply current.

Board dimensions: 4.63"L x 7.625"W x 1.875"H


eFlow104NB

- UL Listed Sub-Assembly in the U.S. and Canada for Access Control and Burglar. UL Listed Sub-Assembly in the U.S. for Fire.
- Two (2) 24VDC power outputs
 - Switched main (affected by fire alarm)
 - Unswitched aux. (continuous power)
- 10 amp total supply current.

Board dimensions: 4.63"L x 8.25"W x 1.6"H

Features:

- 120VAC 60Hz. input.
- Additional aux. power-limited output rated @ 1 amp (unswitched).
- Over voltage protection.
- Supervised Fire Alarm disconnect (latching or non-latching).
- Low power cutoff - protects stand-by batteries from deep discharge.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC fail, low battery and battery presence supervision.

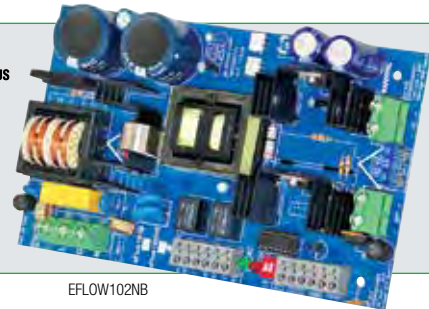

EFLOW102NB

** Above models available mounted in enclosure - refer to pgs. 66-69 for further info.*

Monitor and control eFlow Series Power Supply/Chargers with LINQ2 - Network Communication Modules (pg. 34)

SINGLE OUTPUT POWER SUPPLY/CHARGERS

AL100UL

- UL Listed in the U.S. and Canada for Access Control and Burglar Alarms.
- 0.75 amp @ 12VDC.
- Fits one (1) 12VDC/7AH or two (2) 12VDC/4AH batteries.
- Plug-in transformer required.*

Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

**AL176UL**

- UL Listed in the U.S. and Canada for Access Control and Burglar Alarms.
- 115VAC 60Hz. input.
- 1.75 amp @ 12VDC or 24VDC.

Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

**AL201UL**

- UL Listed in the U.S. and Canada for Access Control and Burglar Alarms.
- 1.75 amp @ 12VDC.
- Fits one (1) 12VDC/7AH or two (2) 12VDC/4AH batteries.
- 24VAC input (transformer required)

Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

**AL176ULX**

- AL176UL with larger enclosure and cam lock.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D



22

Features:

- Class 2 Rated power-limited output.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Automatic switch over to stand-by battery when AC fails.
- AC fail and low battery supervision.
- AC input and DC output LED indicators.
- Includes battery leads.



AL201UL

1012 SERIES POWER SUPPLY/CHARGERS

Single Output

AL1012ULX

- UL Listed in the U.S. and Canada for Access Control.
- 10 amp @ 12VDC.
- Single non power-limited output.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions:

15.5"H x 12.23"W x 4.5"D

Four (4) Output

AL1012ULXPD4

- UL Listed in the U.S. and Canada for Access Control.
- 10 amp @ 12VDC.
- Four (4) fuse protected non power-limited outputs.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions:

15.5"H x 12.23"W x 4.5"D

AL1012ULXPD4CB

- AL1012ULXPD4 with Four (4) Class 2 Rated PTC protected power-limited outputs.

Eight (8) Output

AL1012ULXPD8

- UL Listed in the U.S. and Canada for Access Control.
- 10 amp @ 12VDC.
- Eight (8) fuse protected non power-limited outputs.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions:

15.5"H x 12.23"W x 4.5"D

AL1012ULXPD8CB

- AL1012ULXPD8 with Eight (8) Class 2 Rated PTC protected power-limited outputs.

23

Features:

- 115VAC 60Hz. input.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC fail, low battery and battery presence supervision.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.



AL1012ULXPD8CB

1012 SERIES POWER SUPPLY/CHARGERS

Sixteen (16) Output

AL1012ULXPD16

- UL Listed in the U.S. and Canada for Access Control.
- 10 amp @ 12VDC.
- Sixteen (16) fuse protected non power-limited outputs.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

AL1012ULXPD16CB

- AL1012ULXPD16 with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.

Features:

- 115VAC 60Hz. input.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC fail, low battery and battery presence supervision.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.



AL1012ULXPD16CB
(Batteries optional - order separately)

TWO (2) OUTPUT SWITCHING POWER SUPPLY/CHARGERS

AL125UL

- UL Listed in the U.S. and Canada for Access Control.
- 1 amp @ 12VDC or 24VDC.
- Fits one (1) 12VDC/7AH or two (2) 12VDC/4AH batteries.

Enclosure dimensions:
8.5"H x 7.5"W x 3.5"D

AL125ULX

- AL125UL with larger enclosure and cam lock.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:
13.5"H x 13"W x 3.25"D



AL125UL

AL125ULE

- UL Listed in the U.S. and Canada for Access Control.
- 1 amp @ 12VDC or 24VDC.
- Fits one (1) 12VDC/7AH or two (2) 12VDC/4AH batteries.
- 24VAC input (*refer to Transformer Pgs. 172*).

Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

AL125ULP

- UL Listed in the U.S. and Canada for Access Control.
- 1 amp @ 12VDC or .5 amp @ 24VDC.
- Fits one (1) 12VDC/7AH or two (2) 12VDC/4AH batteries.
- Plug-in transformer (24VAC/40VA) included.

Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

Features:

- 115VAC 60Hz. input (except for AL125ULE).
- 12VDC or 24VDC Class 2 Rated power-limited outputs.
 - One (1) Fail-Safe/Fail-Secure lock output (switched).
 - One (1) auxiliary power output (unswitched).
- Supervised Fire Alarm Disconnect (latching with reset or non-latching).
- Access Control trigger input.
- Filtered and electronically regulated output(s).

- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Automatic switch over to stand-by battery when AC fails.
- AC fail supervision.
- AC input LED indicator on the front panel.
- Includes battery leads.



TWO (2) OUTPUT SWITCHING POWER SUPPLY/CHARGERS

AL175UL

- UL Listed in the U.S. and Canada for Access Control. CSFM Approved.
 - 1.75 amp @ 12VDC or 24VDC.
- Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

AL175ULX

- AL175UL with larger enclosure and cam lock.
 - Fits two (2) 12VDC/7AH batteries.
- Enclosure dimensions: 13.5"H x 13"W x 3.25"D

Features:

- 115VAC 60Hz. input.
- 12VDC or 24VDC Class 2 Rated PTC protected power-limited outputs:
 - One (1) Fail-Safe/Fail-Secure lock output (switched).
 - One (1) auxiliary power output (unswitched).
- Dry trigger Fire Alarm disconnect/Access Control input.
- Aux. relay output.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Automatic switch over to stand-by battery when AC fails.
- AC fail supervision.
- AC input and DC output LED indicators.
- Includes battery leads.




26

AL175ULX2

- UL Listed in the U.S. and Canada for Access Control. CSFM Approved.
 - 1.75 amp @ 12VDC or 24VDC.
 - Field selectable 12VDC (Range 10VDC - 13VDC) or 24VDC (Range 24VDC - 27VDC) outputs.
 - External reset switch and power LED.
 - Latching fire alarm tie-in with manual reset.
 - Fits two (2) 12VDC/12AH batteries.
 - Includes cam lock.
- Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

AL175ULXB application:

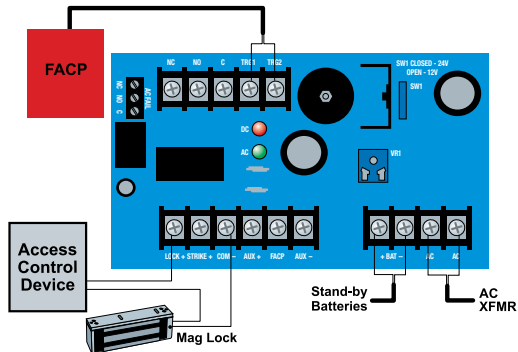

POWER SUPPLY/CHARGERS WITH FIRE ALARM INTERFACE

Five (5) Output

AL1012ULM

- UL Listed in the U.S. and Canada for Access Control.
- 10 amp @ 12VDC.
- Five (5) Class 2 Rated PTC protected power-limited outputs.
- Provides power for Fail-Safe and/or Fail-Secure locking devices.
- Fire Alarm Panel or Access Control System trigger inputs.
[NO] or [NC] supervised trigger input and/or polarity reversal trigger.
- Red LED's indicate condition of each power output.
- Power & input trigger LED's.
- Filtered and electronically regulated outputs.
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.



- Automatic switch over to stand-by battery when AC fails.
- AC fail, low battery, and battery presence supervision.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions:
15.5"H x 12.23"W x 4.5"D

AL1012ULM



(Batteries optional - order separately)

27

ACCESS POWER CONTROLLERS

Four (4) Output

ACM4

- UL Listed Sub-Assembly in the U.S. and Canada for Access Control, UL Listed Sub-Assembly in Canada for Burglar Alarms.
 - Four (4) fuse protected outputs.
- Board dimensions: 5.125"L x 3.625"W x 1.25"H

ACM4E

- UL Listed in the U.S. and Canada for Access Control, UL Listed in Canada for Burglar. CSFM Approved.
 - Four (4) fuse protected outputs.
- Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

ACM4CB

- UL Listed Sub-Assembly in the U.S. and Canada for Access Control, UL Listed Sub-Assembly in Canada for Burglar Alarms.
 - Four (4) PTC protected outputs.
- Board dimensions: 5.125"L x 3.625"W x 1.25"H

ACM4CBE

- UL Listed in the U.S. and Canada for Access Control, UL Listed in Canada for Burglar. CSFM Approved.
 - Four (4) PTC protected outputs.
- Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

28

Features:

- 12 to 24 volt AC or DC operation (setting not required).
- Power supply input options:
 - a) One (1) common power input (board and lock power).
 - b) Two (2) isolated power inputs (one (1) for board power and one (1) for lock/hardware power).
- Four (4) Access Control System trigger inputs.
- Input options:
 - a) Four (4) normally open [NO] inputs.
 - b) Four (4) open collector inputs.
 - c) Any combination of the above.
- Four (4) independently controlled fuse protected outputs.
- Output options (ACM4 and ACM4E):
 - a) Four (4) Fail-Safe and/or Fail-Secure power outputs.
 - b) Four (4) form "C" 5 amp rated relay outputs
 - c) Any combination of the above.



- Output options (ACM4CB and ACM4CBE):
 - a) Four (4) Fail-Safe and/or Fail-Secure power outputs.
- Four (4) auxiliary power outputs (unswitched).
- Red LEDs indicate outputs are triggered (relays energized).
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the four (4) outputs.
- Fire Alarm disconnect input options:
 - a) Normally open [NO] or normally closed [NC] dry contact input.
 - b) Polarity reversal input from FACP signaling circuit.
- Alarm output relay indicates that FACP input is triggered.
- Green LED indicates FACP disconnect is triggered.

* Units will operate from 12 volts to 24 volts AC or DC with a total load of 10 amp max. Output voltage is equal to the input voltage.



ACCESS POWER CONTROLLERS

Eight (8) Output

ACM8

- UL Listed Sub-Assembly in the U.S. and Canada for Access Control, UL Listed Sub-Assembly in Canada for Burglar Alarms.

- Eight (8) fuse protected outputs.

Board dimensions: 4.5"L x 8"W x 1.25"H

ACM8E

- UL Listed in the U.S. and Canada for Access Control, UL Listed in Canada for Burglar. CSFM Approved.

- Eight (8) fuse protected outputs.

Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

ACM8CB

- UL Listed Sub-Assembly in the U.S. and Canada for Access Control, UL Listed Sub-Assembly in Canada for Burglar Alarms.

- Eight (8) PTC protected outputs.

Board dimensions: 4.5"L x 8"W x 1.25"H

ACM8CBE

- UL Listed in the U.S. and Canada for Access Control, UL Listed in Canada for Burglar. CSFM Approved.

- Eight (8) Class 2 Rated PTC protected power-limited outputs.

Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

Features:

- 12 to 24 volt AC or DC operation (setting not required).
- Power supply input options:
 - a) One (1) common power input (board and lock power).
 - b) Two (2) isolated power inputs (one (1) for board power and one (1) for lock/hardware power).
- Eight (8) Access Control System trigger inputs.
- Input options:
 - a) Eight (8) normally open [NO] inputs.
 - b) Eight (8) open collector inputs.
 - c) Any combination of the above.
- Eight (8) independently controlled fuse protected outputs.
- Output options (ACM8 and ACM8E):
 - a) Eight (8) Fail-Safe and/or Fail-Secure power outputs.
 - b) Eight (8) form "C" 5 amp rated relay outputs
 - c) Any combination of the above.



- Output options (ACM8CB and ACM8CBE):
 - a) Eight (8) Fail-Safe and/or Fail-Secure power outputs.
- Eight (8) auxiliary power outputs (unswitched).
- Red LEDs indicate outputs are triggered (relays energized).
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the eight (8) outputs.
- Fire Alarm disconnect input options:
 - a) Normally open [NO] or normally closed [NC] dry contact input.
 - b) Polarity reversal input from FACP signaling circuit.
- Alarm output relay indicates that FACP input is triggered.
- Green LED indicates FACP disconnect is triggered.

* Units will operate from 12 volts to 24 volts AC or DC with a total load of 10 amp max. Output voltage is equal to the input voltage.



ACCESS POWER CONTROLLERS WITH POWER SUPPLY/CHARGERS

AL400ULACM

- UL Listed in the U.S. and Canada for Access Control and CSFM Approved.
- 4 amp @ 12VDC or 3 amp @ 24VDC.
- Eight (8) Class 2 Rated fuse protected power-limited outputs.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

AL400ULACMCB

- AL400ULACM with Eight (8) Class 2 Rated PTC protected power-limited outputs.

30 AL600ULACM

- UL Listed in the U.S. and Canada for Access Control and CSFM Approved.
- 6 amp @ 12VDC or 24VDC.
- Eight (8) fuse protected non power limited outputs.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

AL600ULACMCB

- AL600ULACM with Eight (8) Class 2 Rated PTC protected power-limited outputs.

AL1012ULACM

- UL Listed in the U.S. and Canada for Access Control.
- 10 amp @ 12VDC.
- Eight (8) fuse protected non power-limited outputs.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

AL1012ULACMCB

- AL1012ULACM with Eight (8) Class 2 Rated PTC protected power-limited outputs.

AL1024ULACM

- UL Listed in the U.S. and Canada for Access Control.
- 10 amp @ 24VDC.
- Eight (8) fuse protected non power-limited outputs.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

AL1024ULACMCB

- AL1024ULACM with Eight (8) Class 2 Rated PTC protected power-limited outputs.

* All models available in larger enclosure (add suffix "J" to model number, Ex. AL1024ULACMCBJ). These products are UL Listed only.



ACCESS POWER CONTROLLERS WITH POWER SUPPLY/CHARGERS

ACM Series Features:


- 12 or 24 AC or DC operation (setting not required).
- Power supply input options:
 - a) One (1) common power input (board and lock power).
 - b) Two (2) isolated power inputs (one (1) for board power and one (1) for lock/hardware power).
- Eight (8) Access Control System trigger inputs.
- Input options:
 - a) Eight (8) normally open [NO] inputs.
 - b) Eight (8) open collector inputs.
 - c) Any combination of the above.
- Eight (8) independently controlled fuse protected outputs.
- Output options (models with fuse protected outputs):
 - a) Eight (8) Fail-Safe and/or Fail-Secure power outputs.
 - b) Eight (8) form "C" 5 amp rated relay outputs
 - c) Any combination of the above.
- Output options (models with PTC protected outputs):
 - a) Eight (8) Fail-Safe and/or Fail-Secure power outputs.
- Eight (8) auxiliary power outputs (unswitched).
- ACM8 main fuse is rated @ 10 amp.
- Red LEDs indicate outputs are triggered (relays energized).
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the eight (8) outputs.
- Fire Alarm disconnect input options:
 - a) Normally open [NO] or normally closed [NC] dry contact input.
 - b) Polarity reversal input from FACP signaling circuit.

- Alarm output relay indicates that FACP input is triggered.
- Green LED indicates FACP disconnect is triggered.
- 115VAC 60Hz. input.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC fail, low battery and battery presence supervision.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.

AL600UACM



31

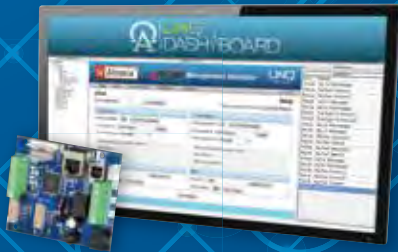

NETWORK MANAGEMENT & COMMUNICATION

LIQ

Control, Monitor & Report Power...
from anywhere over the network.

LINQTM NETWORK POWER DISTRIBUTION MODULES

Upgrade, control and communicate with virtually any low voltage AC or DC power supply over the network.

LINQ8PD

- Control, monitor and report power/diagnostics from anywhere over the network.
- Each LINQ8PD(CB) is compatible with one (1) or two (2) AC or supervised DC power supply/chargers.
- Retrofits with existing power supplies.
- Output voltage is individually selectable for each of the eight (8) outputs when utilizing two (2) power supplies.
- Battery backup is selectable by output.
- Eight (8) fuse protected outputs.

LINQ8PDCB


- LINQ8PD with eight (8) PTC protected outputs.

Status Monitoring Functions:

- Input and output voltage and current monitoring
- Real time battery health monitoring
- High temperature monitoring...and more!

Features:

- Provides local and/or remote access to critical information via LAN/WAN to help keep systems up and running at optimal levels.
- Control power output(s) locally or remotely.
- Email and Windows Dashboard Alert notifications report real-time power diagnostics.
- Event log tracks history.
- Secure Socket Layer (SSL).
- Reduces system downtime, eliminates service calls and creates RMR opportunities.
- Programmable via USB or web browser.
- Includes operating software and 6ft. USB cable.

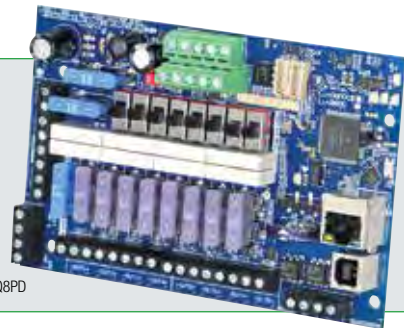

LINQ8PD



NETWORK COMMUNICATION MODULES

Control, Monitor and Report eFlow Power

LINQ2

- Control, monitor and report power/diagnostics from anywhere over the network.
- Each LINQ2 is compatible with one (1) or two (2) eFlow power supply/chargers.

Status Monitoring Functions:

- DC output voltage
- Output current draw
- AC status
- Battery status
- Unit temperature

Setup:

- Site ID identifies installation location
- Power supply/charger calibration
- DC output(s) control
- Relay control - remotely operate HVAC, lighting or security systems



LINQ2

Features:

- UL Listed Sub-Assembly in the U.S. for Access Control, Burglar and Fire, UL Listed Sub-Assembly in Canada for Access Control and Burglar.
- Provides local and/or remote access to critical information via LAN/WAN to help keep systems up and running at optimal levels.
- Control eFlow power output(s) locally or remotely.
- Two (2) integral network controlled Form "C" Relays.
- Email and Windows Dashboard Alert notifications report real-time power diagnostics.
- Event log tracks history.
- Secure Socket Layer (SSL).
- Reduces system downtime, eliminates service calls and creates RMR opportunities.
- Programmable via USB or web browser.
- Includes operating software and 6ft. USB cable.



LINQ DASHBOARD

CENTRAL MANAGEMENT SOFTWARE



LINQ8PD status view:

Features:

- Provides a single software platform for monitoring power supply status.
- Intuitive interface allows the user to manage multiple sites with ease regardless of the number of monitored devices.
- This easy to use application is designed to work with current Altronix products that provide web based management and will also allow access to third party web based solutions such as IP cameras.





ENHANCED ACCESS POWER CONTROLLERS

eFlow4NA8

- UL Listed in the U.S. for Access Control, UL Listed in Canada for Burglar Alarms, CSFM, CE Approved.
- 4 amp @ 12VDC or 24VDC.
- Eight (8) Class 2 Rated fuse protected power-limited outputs.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

eFlow4NA8D

- eFlow4NA8 with Eight (8) Class 2 Rated PTC protected power-limited outputs.

eFlow6NA8

- UL Listed in the U.S. for Access Control, UL Listed in Canada for Burglar Alarms, CSFM, CE Approved.
- 6 amp @ 12VDC or 24VDC.
- Eight (8) fuse protected non power-limited outputs.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

eFlow6NA8D

- eFlow6NA8 with Eight (8) Class 2 Rated PTC protected power-limited outputs.

eFlow102NA8

- UL Listed in the U.S. for Access Control, UL Listed in Canada for Burglar Alarms, CSFM, CE Approved.
- 10 amp @ 12VDC.
- Eight (8) fuse protected non power-limited outputs.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

eFlow102NA8D

- eFlow102NA8 with Eight (8) Class 2 Rated PTC protected power-limited outputs.

* All models available in red enclosure (add suffix "R" to model number, e.g. eFlow4NA8DR).

Monitor and control Maximal-F Series Power Supply/Chargers with LINQ2 - Network Communication Modules (pg. 34)

eFlow104NA8

- UL Listed in the U.S. for Access Control, UL Listed in Canada for Burglar Alarms, CSFM, CE Approved.
- 10 amp @ 24VDC.
- Eight (8) fuse protected non power-limited outputs.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

eFlow104NA8D

- eFlow104NA8 with Eight (8) Class 2 Rated PTC protected power-limited outputs.



EFLOW4NA8



ENHANCED ACCESS POWER CONTROLLERS

eFlow Series

Access Power Controller Features:

- 12 or 24 AC or DC operation (setting not required).
- Eight (8) Access Control System trigger inputs.
- Input options:
 - a) Eight (8) normally open [NO] inputs.
 - b) Eight (8) open collector inputs.
 - c) Any combination of the above.
- Eight (8) independently controlled fuse protected outputs.
- Output options (models with fuse protected outputs):
 - a) Eight (8) Fail-Safe and/or Fail-Secure power outputs.
 - b) Eight (8) form "C" 5 amp rated relay outputs.
 - c) Any combination of the above.
- Output options (models with PTC protected outputs):
 - a) Eight (8) Fail-Safe and/or Fail-Secure power outputs.
- Eight (8) auxiliary power outputs (unswitched).
- ACM8 main fuse is rated @ 10 amp.
- Red LEDs indicate outputs are triggered (relays energized).
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the Sixteen (16) outputs.
- Fire Alarm disconnect input options:
 - a) Normally open [NO] or normally closed [NC] dry contact input.
 - b) Polarity reversal input from FACP signaling circuit.

- 120VAC 60Hz. input.
- Additional aux. power-limited output rated @ 1 amp (unswitched).
- Supervised Fire Alarm disconnect.
- Over voltage protection - guards against equipment damage
- Built-in charger for sealed lead acid or gel type batteries.
- Power LED visible on the enclosure door.
- AC fail supervision, battery fail & presence supervision.
- Automatic switch over to stand-by battery when AC fails.
 - Transfer to stand-by battery power is instantaneous with no interruption.
- Low battery cutoff - prevents batteries from discharge.
- Green AC Power LED indicates 120VAC present.
- AC input and DC output LED indicators.
- Short circuit and overload protection.

Enclosure dimensions:
15.5"H x 12"W x 4.5"D

UL Listed in the U.S. and Canada for Access Control,
CSFM Approved and CE Approved.





ENHANCED ACCESS POWER CONTROLLERS

Maximal3F

- 4.6 amp @ 12VDC or 5.2 amp @ 24VDC.
- Sixteen (16) fuse protected outputs.

Maximal5F

- 8.6 amp @ 12VDC.
- Sixteen (16) fuse protected outputs.

Maximal7F

- 9.2 amp @ 24VDC.
- Sixteen (16) fuse protected outputs.



MAXIMAL7FD

Maximal11F

- *Power supply 1* / Eight (8) outputs:
3.3 amp @ 12VDC or 3.6 amp @ 24VDC.
- *Power supply 2* / Eight (8) outputs:
3.3 amp @ 12VDC or 3.6 amp @ 24VDC.
- Sixteen (16) fuse protected outputs.

Maximal33F

- *Power supply 1* / Eight (8) outputs:
5.3 amp @ 12VDC or 5.6 amp @ 24VDC.
- *Power supply 2* / Eight (8) outputs:
5.3 amp @ 12VDC or 5.6 amp @ 24VDC.
- Sixteen (16) fuse protected outputs.

Maximal55F

- *Power supply 1* / Eight (8) outputs:
9.3 amp @ 12VDC.
- *Power supply 2* / Eight (8) outputs:
9.3 amp @ 12VDC.
- Sixteen (16) fuse protected outputs.

Maximal75F

- *Power supply 1* / Eight (8) outputs:
9.3 amp @ 12VDC.
- *Power supply 2* / Eight (8) outputs:
9.6 amp @ 24VDC.
- Sixteen (16) fuse protected outputs.

Maximal77F

- *Power supply 1* / Eight (8) outputs:
9.6 amp @ 24VDC.
- *Power supply 2* / Eight (8) outputs:
9.6 amp @ 24VDC.
- Sixteen (16) fuse protected outputs.

All models available with PTC protected power-limited outputs (add suffix "D" to model number, Ex. Maximal33FD).

Monitor and control Maximal-F Series Power Supply/Chargers with LINQ2 - Network Communication Modules (pg. 34)

MAXIMAL[®] ENHANCED ACCESS POWER CONTROLLERS

Maximal-F Series

Access Power Controller Features:

- Sixteen (16) Access Control System trigger inputs.
- Input options:
 - a) Sixteen (16) normally open [NO] inputs.
 - b) Sixteen (16) open collector inputs.
 - c) Any combination of the above.
- Sixteen (16) independently controlled fuse protected outputs.
- Output options (models with fuse protected outputs):
 - a) Sixteen (16) Fail-Safe and/or Fail-Secure power outputs.
 - b) Sixteen (16) form "C" 5 amp rated relay outputs.
 - c) Any combination of the above.
- Output options (models with PTC protected outputs):
 - a) Sixteen (16) Fail-Safe and/or Fail-Secure power outputs.
- Sixteen (16) auxiliary power outputs (unswitched).
- ACM8 main fuse is rated @ 10 amp.
- Red LEDs indicate outputs are triggered (relays energized).
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the Sixteen (16) outputs.
- Fire Alarm disconnect input options:
 - a) Normally open [NO] or normally closed [NC] dry contact input.
 - b) Polarity reversal input from FACP signaling circuit.

- 120VAC 60Hz. input.
- Additional aux. power-limited output(s) rated @ 1 amp (unswitched).
- Supervised Fire Alarm disconnect.
- Over voltage protection - guards against equipment damage
- Built-in charger for sealed lead acid or gel type batteries.
- AC fail supervision, battery fail & presence supervision.
- Automatic switch over to stand-by battery when AC fails.
Transfer to stand-by battery power is instantaneous with no interruption.
- Low battery cutoff - prevents batteries from discharge.
- Green AC Power LED indicates 120VAC present.
- AC input and DC output LED indicators.
- Short circuit and overload protection.
- Includes cam lock and battery leads.

Enclosure Dimensions: 27.25"H x 19"W x 6.5"D

UL Listed in the U.S. and Canada for Access Control,
CSFM Approved and CE Approved.



MAXIMAL[®] ENHANCED EXPANDABLE POWER SYSTEMS

Maximal11FE

- *Power supply 1:*
4 amp @ 12VDC or 4 amp @ 24VDC
- *Power supply 2:*
4 amp @ 12VDC or 4 amp @ 24VDC

Maximal13FE

- *Power supply 1:*
4 amp @ 12VDC or 4 amp @ 24VDC
- *Power supply 2:*
6 amp @ 12VDC or 6 amp @ 24VDC

Maximal33FE

- *Power supply 1:*
6 amp @ 12VDC or 6 amp @ 24VDC
- *Power supply 2:*
6 amp @ 12VDC or 6 amp @ 24VDC

Maximal35FE

- *Power supply 1:*
6 amp @ 12VDC or 6 amp @ 24VDC
- *Power supply 2:*
10 amp @ 12VDC

Maximal37FE

- *Power supply 1:*
6 amp @ 12VDC or 6 amp @ 24VDC
- *Power supply 2:*
10 amp @ 24VDC

Maximal55FE

- *Power supply 1:*
10 amp @ 12VDC
- *Power supply 2:*
10 amp @ 12VDC

Maximal75FE

- *Power supply 1:*
10 amp @ 12VDC
- *Power supply 2:*
10 amp @ 24VDC

Maximal77FE

- *Power supply 1:*
10 amp @ 24VDC
- *Power supply 2:*
10 amp @ 24VDC

Features:

- 120VAC 60Hz. input.
- Additional aux. power-limited output(s) rated @ 1 amp (unswitched).
- Supervised Fire Alarm disconnect.
- Over voltage protection - guards against equipment damage
- Built-in charger for sealed lead acid or gel type batteries.
- AC fail supervision, battery fail & presence supervision.
- Automatic switch over to stand-by battery when AC fails. Transfer to stand-by battery power is instantaneous with no interruption.
- Low battery cutoff - prevents batteries from discharge.
- Green AC Power LED indicates 120VAC present.
- AC input and DC output LED indicators.
- Short circuit and overload protection.

Enclosure Dimensions: 27.25"H x 19"W x 6.5"D

UL Listed in the U.S. and Canada for Access Control, CSFM Approved and CE Approved.



Monitor and control Maximal-F Series Power Supply/Chargers with LINQ2 - Network Communication Modules (pg. 34)

ENHANCED EXPANDABLE POWER SYSTEMS

- Customizable with up to three (3) field-installable sub assembly modules -



(Batteries optional -
order separately)




MOM5



PD4UL



PD8UL



PD16W



VR6



PDS8



ACM4



**ACM8
ACMS8**

UL Listed Sub-Assembly Optional Accessory Modules:

MOM5

Five (5) Output Power Distribution Module
with Fire Alarm Interface (pg. 78)

PD4UL and PD4ULCB

Four (4) Output Power Distribution Module (pg. 170)

PD8UL and PD8ULCB

Eight (8) Output Power Distribution Module (pg. 170)

PD16W and PD16WCB

Sixteen (16) Output Power Distribution Module (pg. 170)

VR6 and PDS8 / PDS8CB

Voltage Regulator and Dual Input Power
Distribution Module (pg. 44)

ACM4 and ACM4CB

Four (4) Output Access Power Controller (pg. 28)

ACM8 and ACM8CB

Eight (8) Output Access Power Controller (pg. 29)

ACMS8 and ACMS8CB

Dual Input Access Power Controller (pg. 45)

Please visit www.altronix.com System Design Tools to
Customize Your Maximal Power System.

Eight (8) Output

Maximal1RH

- 4 amp @ 12VDC or 3 amp @ 24VDC.
- 2.0 amp max. current per output.
- Eight (8) fuse protected outputs.

Maximal3RH

- 6 amp @ 12VDC or 24VDC.
- 2.0 amp max. current per output.
- Eight (8) fuse protected outputs.

Sixteen (16) Output

42 **Maximal1R**

- 4 amp @ 12VDC or 3 amp @ 24VDC.
- 2.0 amp max. current per output.
- Sixteen (16) fuse protected outputs.

Maximal3R

- 6 amp @ 12VDC or 24VDC.
- 2.0 amp max. current per output.
- Sixteen (16) fuse protected outputs.

Maximal33R

- 12 amp @ 12VDC and/or 24VDC.
- 12 amp total output current.
- 2.0 amp max. current per output.
- Sixteen (16) fuse protected outputs.

Features:

- 115VAC 50/60Hz. input
 - Normally closed [NC] or normally open [NO] dry contact inputs (switch selectable).
 - Individually selectable, Mag Lock/Strike (Fail-Safe, Fail-Secure) solid state fuse protected power outputs.
 - Fire Alarm disconnect (latching with reset or non-latching) is individually selectable for any or all of the outputs.
 - Fire Alarm disconnect input options:
 - a) Normally open [NO] or normally closed [NC] dry contact input.
 - b) Polarity reversal input from FACP signaling circuit.
 - Remote reset capability for latching Fire Alarm Interface mode
 - Filtered and electronically regulated outputs.
 - Short circuit and thermal overload protection.
 - Removable terminal blocks with locking screw flange.
 - 3-wire line cord.
 - Illuminated master power switch.
 - Built-in charger for sealed lead acid or gel type batteries.
 - Zero voltage drop upon transfer to battery backup.
 - Automatic switch over to stand-by battery when AC fails.
 - AC fail, low battery and battery presence supervision.
 - Individual output status LEDs located on the front panel.
 - 2U rack mount chassis for use in standard EIA 19" rack.
- * All models available with PTC protected outputs (add suffix "D" to model number, Ex. Maximal3RD). These products are not UL Listed.





PROVIDE 12 / 24VDC SIMULTANEOUSLY OVER 8 OUTPUTS

Stackable mounting configuration
saves valuable enclosure space
and reduces cost.

ACCESS CONTROL DISTRIBUTION / ACCESSORIES

*Voltage Regulator***VR6**

- Converts a 24VDC input into a regulated 5VDC or 12VDC output.
- Input: 24VDC @ 1.75A – Output: 5VDC @ 6A
- Input: 24VDC @ 3.5A – Output: 12VDC @ 6A
- Surge suppression.

*Dual Input Power Distribution Modules***PDS8**

- Eight (8) fuse protected power outputs are individually selectable to follow power input 1 or input 2.
- Inputs rated at 5VDC to 24VDC up to 10A or 16VAC to 28VAC up to 14A.
- Individual outputs may be set to OFF position for servicing.
- Multiple units may be daisy-chained to accommodate larger systems.

**PDS8CB**

- PDS8 with PTC protected outputs.


*Dual Input Power Distribution Module and Voltage Regulator Kits***PDS8K1**

- Includes PDS8 and VR6 voltage regulator.

PDS8CBK1

- Includes PDS8CB and VR6 voltage regulator.

44

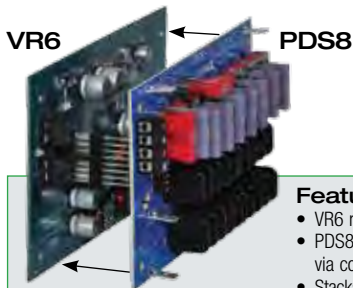**Features:**

- VR6 reduces the cost of adding another power supply.
- PDS8/PDS8CB is designed to piggyback onto the VR6 making an instant plug-in connection via common standoffs.
- Stackable mounting configuration saves valuable enclosure space.

ACCESS CONTROL DISTRIBUTION / ACCESSORIES

Dual Input Access Power Controllers

ACMS8

- Eight (8) fuse protected power outputs are individually selectable to follow power input 1 or input 2.
- Input 1 and Input 2 voltage range:
5VDC to 24VDC, up to 10A each, 20A total input.

ACMS8CB


- ACMS8 with PTC protected outputs.
- Input 1 and Input 2 voltage range:
5VDC to 24VDC, up to 10A each, 16A total input.

ACMS8K1

- Kit Includes ACMS8
and VR6 voltage regulator.

ACMS8CBK1

- Kit Includes ACMS8CB
and VR6 voltage regulator.



Features:

- ACMS8/ACMS8CB is designed to piggyback onto the VR6 making an instant plug-in connection via common standoffs.
- Stackable mounting configuration saves valuable enclosure space.
- Eight (8) Individually Controlled trigger inputs:
 - a) Normally open (NO) inputs.
 - b) Normally closed (NC) inputs.
 - c) Open collector sink inputs.
 - d) Wet Input (5VDC - 24VDC) with 10K resistor
 - e) Any combination of the above.
- Eight (8) selectable 5VDC - 24VDC independently controlled outputs or Eight (8) indpendently controlled Form "C" relay outputs:
 - a) Fail-Safe and/or Fail-Secure power outputs.
 - b) Form "C" Relays. Contacts rated @ 5A, dry output rated @ 3A.
 - c) Auxiliary power outputs (unswitched).
 - d) Any combination of the above.
- Fuse protected outputs rated @ 2.5A per output, non power-limited. Total output 20A max.
- Individual outputs may be set to OFF position for servicing.
- Surge suppression.
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the eight (8) outputs.
Fire Alarm disconnect input options:
 - a) Normally open [NO] or normally closed [NC] dry contact input. Polarity reversal input from FACP signaling circuit.
- FACP output relay [NC] contact or provides 10k resistance with [EOL JMP] intact.
- Red LEDs indicate outputs are triggered.
- Blue LED indicates FACP disconnect is triggered.
- Board Dimensions (W x L x H approximate):
8" x 4.5" x 1.25" (203.2mm x 114.3mm x 31.8mm).

TR \square VE™ ACCESS AND POWER INTEGRATION SOLUTIONS

Combine Altronix power and accessories with access controllers from the industry's leading manufacturers.

46



Features:

- Trove™ enclosures let you easily integrate Altronix power with access controllers and accessories from the industry's leading manufacturers.
- Removable backplanes allow you to configure and pretest prior to on-site installation.
- Simplifies board layout and wire management.
- Reduces installation time and labor costs.
- Convenient knockout configuration.
- Accommodates up to four (4) 12VDC/12AH batteries.
- Includes cam lock, tamper switch and mounting hardware.

TROVE1 Enclosure Dimensions: 18"H x 14.5"W x 4.625"D
Backplane Dimensions: 16.625"H x 12.5"W x 0.5"D

TROVE2 Enclosure Dimensions: 27.25"H x 21.5"W x 6.5"D
Backplane Dimensions: 25.375"H x 19.375"W x 0.5"D

TROVE3 Enclosure Dimensions:
36.12"H x 30.125"W x 7.06"D
Backplane Dimensions: 34.0"H x 28.0"W x 0.5"D

Pre-assembled kits available in various configurations.

Please visit www.altronix.com - System Design Tools to
Customize Your Trove Access & Power Integration Solution

TRIVE™ ACCESS AND POWER INTEGRATION SOLUTIONS

*For up to 8 door
CDVI access systems*

Trove1C1 Enclosure + Backplane

- Accommodates the following CDVI boards with or without Altronix power/accessories:
 - A22NB
 - Altronix Power Supplies and Sub-Assemblies
- Includes Altronix Trove1 Enclosure and TC1 backplane for CDVI/Altronix boards.



TC1 Backplane

- Accommodates CDVI boards with or without Altronix power/accessories.
- Fits Altronix Trove1 enclosure.



* Boards not included

*For up to 8 door
DMP access systems*

Trove1DM1 Enclosure + Backplane

- Accommodates the following DMP modules with or without Altronix power/accessories:
 - 734, 734N
 - Altronix Power Supplies and Sub-Assemblies
- Includes Altronix Trove1 Enclosure and TDM1 backplane for DMP modules



TDM1 Backplane

- Accommodates DMP boards with or without Altronix power/accessories.
- Fits Altronix Trove1 enclosure.



* Boards not included

47

All registered trademarks are property of their respective owners.

TROVE™ ACCESS AND POWER INTEGRATION SOLUTIONS

For up to 8 door
HID/Vertx access systems

Trove1V1

Enclosure + Backplane

- Accommodates the following HID/Vertx boards with or without Altronix power/accessories:
 - V100, V200, V300, V1000 and V2000
 - Altronix Power Supplies and Sub-Assemblies
- Includes Altronix Trove1 Enclosure and TV1 backplane for Vertx/Altronix boards.



48

TV1

Backplane

- Accommodates HID/Vertx boards with or without Altronix power/accessories.
- Fits Altronix Trove1 enclosure.

* Boards not included

All registered trademarks are property of their respective owners.

Altronix Adapter Plate for
Genetec Synergis Cloud Link

GB1

- Facilitates mounting the Genetec Synergis Cloud Link to Trove Series HID/Vertx or Mercury backplanes.
 - Conveniently mounts to Altronix enclosures that accommodate Power Distribution Modules
 - Accommodates one (1) Genetec Synergis Cloud Link
 - 16 AWG steel
 - Mounting hardware included
- Dimensions:
7.0"L x 4.1875"W x 0.375"H

Altronix TM2
backplane

Genetec™

Altronix - GB1 Adapter Plate



Cloud Link mounted on
Altronix GB1 mounted to TM2 backplane



* Boards not included

TR^QVE™ ACCESS AND POWER INTEGRATION SOLUTIONS

For up to 8 door Mercury/Lenel access systems

Trove1M1 Enclosure + Backplane

- Accommodates the following Mercury/Lenel boards with or without Altronix power/accessories:
 - Mercury: EP1501, EP1502, EP4502, MR16IN, MR16OUT, MR50, MR51e or MR52
 - Lenel: LNL-2210, LNL-4420, LNL-2220, LNL-1100, LNL-1200, LNL-1300, LNL-1300e or LNL-1320
 - Altronix Power Supplies and Sub-Assemblies
- UL Listed in the U.S. and Canada when installing Lenel access with or without Altronix power/accessories.
- Includes Trove1 Enclosure and TM1 backplane for Mercury/Lenel/Altronix boards

TM1 Backplane

- Accommodates Mercury/Lenel boards with or without Altronix power/accessories
- Fits Altronix Trove1 enclosure.



* Boards not included



For up to 2 door Mercury/Lenel access systems

TM400 Enclosure

- Accommodates the following Mercury/Lenel boards:
 - Mercury: EP1501, EP1502, EP4502, MR16IN, MR16OUT, MR50, MR51e or MR52
 - Lenel: LNL-1100, LNL-1200, LNL-1300, LNL-1300e, LNL-1320, LNL-2210, LNL-2220, LNL-4420



* Boards not included

All registered trademarks are property of their respective owners.

TRIVE™ ACCESS AND POWER INTEGRATION SOLUTIONS

For up to 12 door
AMAG access systems

Trove2AM2 Enclosure + Backplane

- Accommodates the following AMAG boards with or without Altronix power/accessories:
 - M2150-2DC, M2150-4DC, M2150-AC24/4, M2150-2DBC, M2150-4DBC or M2150-8DBC
 - Altronix Power Supplies and Sub-Assemblies
- Includes Altronix Trove2 Enclosure and TAM2 backplane.



* Boards not included

Trove2BH2 Enclosure + Backplane

- Accommodates the following Bosch boards with or without Altronix power/accessories:
 - D7412GV4, D9412GV4, B8512G, B9512G, B520, B901, B299, B600, D8128D, D8125/MUX, D8129, D125B, D129, D132A, D192G, D8130, B208, B308, B426, B450, ICP-SDI-9114
 - Altronix Power Supplies and Sub-Assemblies
- Includes Altronix Trove2 Enclosure and TBH2 backplane.

BOSCH

TB2 Backplane

- Accommodates Bosch boards with or without Altronix power/accessories.
- Fits Altronix Trove2 enclosure.



* Boards not included

All registered trademarks are property of their respective owners.

TRIVE™ ACCESS AND POWER INTEGRATION SOLUTIONS

For up to 10 door
CDVI access systems

Trove2CV2 Enclosure + Backplane

- Accommodates the following CDVI boards with or without Altronix power/accessories:
 - A22NB
 - Altronix Power Supplies and Sub-Assemblies
- Includes Altronix Trove2 Enclosure and TCV2 backplane

TCV2 Backplane

- Accommodates CDVI boards with or without Altronix power/accessories
- Fits Altronix Trove2 enclosure.



* Boards not included

For up to 16 door
DMP access systems

Trove2DM2 Enclosure + Backplane

- Accommodates the following DMP modules with or without Altronix power/accessories:
 - 734, 734N
 - Altronix Power Supplies and Sub-Assemblies
- Includes Altronix Trove2 Enclosure and TDM2 backplane

TDM2 Backplane

- Accommodates DMP modules with or without Altronix power/accessories.
- Fits Altronix Trove2 enclosure.



* Boards not included

All registered trademarks are property of their respective owners.

TRIVE™ ACCESS AND POWER INTEGRATION SOLUTIONS

For up to 12 door
HID/VertX access systems

Trove2V2 Enclosure + Backplane

- Accommodates the following HID/Vertx boards with or without Altronix power/accessories:
 - V100, V200, V300, V1000 or V2000
 - Altronix Power Supplies and Sub-Assemblies
- Fits Altronix Trove2 enclosure.
- Includes Altronix Trove2 Enclosure and TV2 backplane.



* Boards not included

52

TV2 Backplane

- Accommodates HID/Vertx boards with or without Altronix power/accessories.
- Fits Altronix Trove2 enclosure.

TMV2 (optional) Door Backplane

- Accommodates HID/Vertx boards for an additional 12 doors (up to 24 door system).
- Door Backplane Dimensions:
23.75"H x 18"W x 0.5"D

For up to 8 door
Honeywell access systems

Trove2HN2 Enclosure + Backplane

- Accommodates the following Honeywell NetAxs boards with or without Altronix power/accessories:
 - NXC1, NXC1 with NXD1, NXC1 with NXD2, NX4, NX4IN, NX4OUT
 - Altronix Power Supplies and Sub-Assemblies
- Includes Trove2 Enclosure and THN2 backplane.

Honeywell

THE POWER OF CONNECTED

THW2 Backplane

- Accommodates Honeywell NetAxs boards with or without Altronix power/accessories
- Fits Altronix Trove2 enclosure.



* Boards not included

All registered trademarks are property of their respective owners.

TRIVE™ ACCESS AND POWER INTEGRATION SOLUTIONS

For up to 8 door
Honeywell access systems

Trove2HW2

Enclosure + Backplane

- Accommodates the following Honeywell boards with or without Altronix power/accessories:
 - PRO32IC, PRO32R2, PRO32IN, PRO32OUT, PW51KEN, PW6K1IC, PW6K1IN, PW6K1OUT, PW6K1R2, PW6K1ICE and PW6K1R1E
 - Altronix Power Supplies and Sub-Assemblies
- Includes Altronix Trove2 Enclosure and THW2 backplane.

THW2 Backplane

- Accommodates Honeywell boards with or without Altronix power/accessories
- Fits Altronix Trove2 enclosure.

* Boards not included



Honeywell

THE POWER OF CONNECTED

For up to 12 door
Kantech access systems

Trove2KH2

Enclosure + Backplane

- Accommodates the following Kantech boards with or without Altronix power/accessories:
 - KT-300, KT-400, KT-MOD-OUT16 and KT-MOD-INP16
 - Altronix Power Supplies and Sub-Assemblies
- Includes Altronix Trove2 Enclosure and TKH2 backplane.

TKH2 Backplane

- Accommodates Kantech boards with or without Altronix power/accessories
- Fits Altronix Trove2 enclosure.

* Boards not included



KANTECH

All registered trademarks are property of their respective owners.

TR²VE™ ACCESS AND POWER INTEGRATION SOLUTIONS

For up to 8 door
Keyscan access systems

Trove2KA2 Enclosure + Backplane

- Accommodates the following Keyscan boards with or without Altronix power/accessories:
 - OCB8, 250B, 4500B, 8500B, CIM or DPS15
 - Altronix Power Supplies and Sub-Assemblies
 - Altronix T16100 Transformer
- Includes Altronix Trove2 Enclosure and TKA2 backplane.



* Boards not included

KEYSCAN
ACCESS CONTROL SYSTEMS

54

TKA2 Backplane

- Accommodates Keyscan boards with or without Altronix power/accessories
- Fits Altronix Trove2 enclosure.

For up to 12 door
Mercury access systems

Trove2M2 Enclosure + Backplane

- Accommodates the following Mercury/Lenel boards with or without Altronix power/accessories:
 - Mercury: EP1501, EP1502, EP4502, MR161N, MR160UT, MR50, MR51e or MR52
 - Lenel: LNL-2210, LNL-4420, LNL-2220, LNL-1100, LNL-1200, LNL-1300, LNL-1300e or LNL-1320
 - Altronix Power Supplies and Sub-Assemblies
- UL Listed in the U.S. and Canada when installing Lenel access with or without Altronix power/accessories.
- Includes Altronix Trove2 enclosure and TM2 backplane.

MERCURY SECURITY
LENEL
Access Control



* Boards not included

TM2 Backplane

- Accommodates Mercury/Lenel boards with or without Altronix power/accessories
- Fits Altronix Trove2 enclosure.

TMV2 (optional) Door Backplane

- Accommodates Mercury/Lenel Boards for an additional 12 doors (up to 24 door system).
- Door Backplane Dimensions: 23.75"H x 18"W x 0.5"D

All registered trademarks are property of their respective owners.

TR²VE™ ACCESS AND POWER INTEGRATION SOLUTIONS

*For up to 8 door
Sielox access systems*

Trove2SL2 Enclosure + Backplane

- Accommodates the following Sielox boards with or without Altronix power/accessories:
 - AC-1700
 - Altronix Power Supplies
- Includes Altronix Trove2 Enclosure TSH2 backplane.

Sielox

TSL2 Backplane

- Accommodates Sielox boards with or without Altronix power/accessories
- Fits Altronix Trove2 enclosure.



* Boards not included

*For up to 16 door
Software House access systems*

Trove2SH2 Enclosure + Backplane SOFTWARE HOUSE

- Accommodates the following Software House boards with or without Altronix power/accessories:
 - iStar Ultra/Pro GCM, iStar Ultra/Pro ACM, iStar ACM SE, i8, i8 CSI, r8
 - Altronix Power Supplies
- Includes Altronix Trove2 Enclosure and TSH2 backplane.

TSH2 Backplane

- Accommodates Software House boards with or without Altronix power/accessories
- Fits Altronix Trove2 enclosure.



* Boards not included

55

All registered trademarks are property of their respective owners.

TROVE™ ACCESS AND POWER INTEGRATION SOLUTIONS

For up to 16 door
ZKTeco USA access systems

Trove2Z2

Enclosure + Backplane

- Accommodates the following ZKTeco USA boards with or without Altronix power/accessories:
 - ZKTeco SMB/Pro Series C3 and inBio 1,2 and 4 Door Controllers.
 - Altronix Power Supplies and Sub-Assemblies
- Includes Altronix Trove2 Enclosure and TZ2 backplane.

ZKTeco
USA



* Boards not included

TZ2


Backplane

- Accommodates ZKTeco USA boards with or without Altronix power/accessories
- Fits Altronix Trove2 enclosure.

All registered trademarks are property of their respective owners.

Optional Accessories for
TROVE Series

Model	Description
BL3	18" Battery Leads (black and red)
BL4	8" Battery Series Jumper (yellow)
BL6	68" Battery Leads (black and red)
BT126	12VDC / 7AH Rechargeable Battery
BT1212	12VDC / 12AH Rechargeable Battery
GB1	Altronix Adapter Plate for Genetec Synergis Cloud Link
RSB2	Rocker Switch Bracket - Includes two (2) Master Power ON/OFF Switches and Wires
WM25	Magnetic cable tie mount. Accommodates standard zip ties. 16 lbs. holding force. Pack of 25.



RSB2

WM25

TR^oVE™ ACCESS AND POWER INTEGRATION SOLUTIONS

For up to 24 door Mercury access systems

Trove3M3 Enclosure + Backplane

- Accommodates the following Mercury/Lenel boards with or without Altronix power/accessories:
 - Mercury: EP1501, EP1502, EP4502, MR16IN, MR16OUT, MR50, MR51e or MR52
 - Lenel: LNL-2210, LNL-4420, LNL-2220, LNL-1100, LNL-1200, LNL-1300, LNL-1300e or LNL-1320
 - Altronix Power Supplies and Sub-Assemblies
- Includes Altronix Trove3 enclosure and TM3 backplane.

TM3 Backplane

- Accommodates Mercury/Lenel boards with or without Altronix power/accessories
- Fits Altronix Trove3 enclosure.

Pre-assembled kits available in various configurations.

** Boards not included*

All registered trademarks are property of their respective owners.





ACCESS AND POWER INTEGRATION SOLUTION

For up to 16 door Software House access systems

Trove3SH3

Enclosure + Backplane

- Accommodates the following Software House boards with or without Altronix power/accessories:
 - iStar Ultra/Pro GCM, iStar Ultra/Pro ACM, iStar ACM SE, i8, i8 CSI, r8
 - Altronix Power Supplies
- Includes Altronix Trove3 Enclosure and TSH3 backplane.

58

TSH3

Backplane

- Accommodates Software House boards with or without Altronix power/accessories
- Fits Altronix Trove3 enclosure.

Pre-assembled kits available in various configurations.

SOFTWARE HOUSE



** Boards not included*

All registered trademarks are property of their respective owners.

Strikelt PANIC DEVICE POWER CONTROLLERS

Strikelt1


- UL Listed in the U.S. and Canada for Access Control and CSFM Approved.
- Two (2) 20VDC to 26.4VDC individually controlled lock outputs for applications with battery backup.
24VDC for applications without battery backup (U.S. only).
- Current rating 15 amp for 300ms, 0.75 continuous supply current.
- One (1) 20VDC to 26.4VDC aux. output rated at 0.75 amp for applications with battery backup. 24VDC for applications (in U.S.) not requiring battery backup.
- Selectable timed lock release from 1 sec. to 30 seconds.
- One (1) 12VDC filtered and regulated output rated @ 0.75 amp.
- Two (2) delayed follower relays control automatic door operators.
- Two (2) follower relays can be used to indicate doors have been released.
- Two (2) programmable Fire Alarm Disconnect options:
 - a) Removes power to outputs and disables delayed follower relays.
 - b) Connects power to lock outputs and enables delayed follower relays.
- LED indicators monitor: lock status, lock wiring trouble conditions (open or short circuit), FACP trigger input and battery.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

Strikelt2:

- UL Listed in the U.S. and Canada for Access Control and CSFM Approved.
- One (1) 24VDC controlled lock output rated @ 16 amp for 300ms.
- One (1) 24VDC regulated auxiliary output rated @ .5 amp.
- One (1) N/O trigger input.
- LED indicates presence of 24VDC.
- Fits two (2) 12VDC/4AH batteries.

Enclosure dimensions: 8.25"H x 7.5"W x 3.5"D

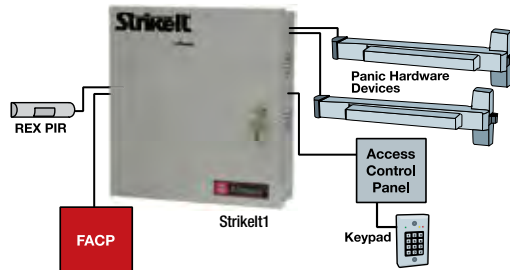

59

Features:

- Designed to handle the high current surge panic hardware locking device(s) demand.
- Built-in charger for sealed lead acid or gel type batteries.
- Automatic switch over to stand-by battery when AC fails.

- Short circuit and thermal overload protection.
- AC power LED indicator.
- 115VAC 50/60Hz. input.
- Includes cam lock and battery leads.



DISTRIBUTED CONTROL PANEL POWER UNITS

Eight (8) Output

AL168CB

- 6 amp @ 16VAC or 5.5 amp @ 18VAC.
 - Eight (8) PTC protected power outputs.
- Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

AL168175CB

- 10 amp @ 16VAC.
 - Eight (8) PTC protected power outputs.
- Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

AL168300CB

- 18 amp @ 16VAC or 16 amp @ 18VAC.
 - Eight (8) PTC protected power outputs.
 - Includes cam lock.
- Enclosure dimensions: 13.5"H x 13"W x 3.25"D

AL168300CBM

- 18 amp @ 16VAC or 16 amp @ 18VAC.
 - Eight (8) PTC protected power outputs.
- Enclosure dimensions: 8.5"H x 7.5"W x 3.75"D

AL168600CB

- 40 amp @ 16VAC or 36 amp @ 18VAC.
 - Eight (8) PTC protected power outputs.
 - Includes cam lock.
- Enclosure dimensions: 13.5"H x 13"W x 3.25"D

60

Features:

- CE Approved.
- 115VAC 50/60Hz. input.
- Surge suppression.
- Illuminated master power switch (AL168CB has power ON/OFF switch).
- Short circuit and thermal overload protection.
- AC power LED indicator.



AL168600CB



TRIPLE VOLTAGE POWER SUPPLY/CHARGERS

Three (3) Output

AL400UL3

- UL Listed in the U.S. and Canada for Access Control. UL Listed in the U.S. for Burglar Alarms, Fire and Nurse Call. CSFM Approved.
 - Simultaneous power outputs:
1.75 amp @ 5VDC, 1.75 amp @ 12VDC, and 1.5 amp @ 24VDC.
 - Three (3) Class 2 Rated power-limited outputs.
 - Fits two (2) 12VDC/7AH batteries.
- Enclosure dimensions: 13.5"H x 13"W x 3.25"D

AL400UL3X

- AL400UL3 with larger enclosure.
 - Fits two (2) 12VDC/12AH batteries.
- Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

AL600UL3

- UL Listed in the U.S. and Canada for Access Control. UL Listed in the U.S. for Burglar Alarms, Fire and Nurse Call. CSFM Approved.
 - Simultaneous power outputs:
1.75 amp @ 5VDC, 1.75 amp @ 12VDC, and 3 amp @ 24VDC.
 - Three (3) total outputs:
Class 2 Rated power-limited outputs (5VDC & 12VDC), non power-limited output (24VDC).
 - Fits two (2) 12VDC/7AH batteries.
- Enclosure dimensions: 13.5"H x 13"W x 3.25"D

AL600UL3X

- AL600UL3 with larger enclosure.
 - Fits two (2) 12VDC/12AH batteries.
- Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

AL600UL3

Features:

- 115VAC 60Hz. input.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC fail, low battery and battery presence supervision.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.



(Batteries optional - order separately)



NEXT GENERATION POWER...WITH MANAGEMENT



With Optional LINQ2 you can monitor,
control and report power.



ENHANCED POWER SUPPLY/CHARGERS

Single Output

eFlow3N

- UL Listed in the U.S. and Canada for Access Control and Burglar Alarms. UL Listed in the U.S. for Fire. CSFM Approved.
- 12VDC or 24VDC @ 2 amp total supply current.
- Class 2 Rated power-limited outputs.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

- * For larger enclosure add suffix "X" to model number (i.e. eFlow3NX)
Enclosure accommodates two (2) 12VDC/12AH batteries.
Enclosure dimensions: 15.5"H x 12.23"W x 4.5"

Four (4) Output

eFlow3N4

- UL Listed in the U.S. and Canada for Access Control and Burglar Alarms. UL Listed in the U.S. for Fire. CSFM Approved.
- 12VDC or 24VDC @ 2 amp total supply current.
- Four (4) Class 2 Rated fuse protected power-limited outputs.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

eFlow3N4D

- eFlow3N4 with Four (4) Class 2 Rated PTC protected power-limited outputs.

Features:

- 120VAC 60Hz. input.
- Built-in supervised fire alarm disconnect.
- Additional aux. power-limited output rated @ 1 amp (unswitched).
- Over voltage protection - guards against equipment damage.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Low power cutoff - protects stand-by batteries from deep discharge.
- Power LED visible on the enclosure door.



- AC fail, low battery and battery presence supervision.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.
- Enclosure accommodates up to two (2) 12VDC/7AH batteries.

Monitor and control eFlow Series Power Supply/Chargers with LINQ2 - Network Communication Modules (pg. 34)



ENHANCED POWER SUPPLY/CHARGERS

Single Output

eFlow4N

- UL Listed in the U.S. and Canada for Access Control and Burglar Alarms. UL Listed in the U.S. for Fire. CSFM Approved.
 - 12VDC or 24VDC @ 4 amp total supply current.
 - Class 2 Rated power-limited outputs.
- Enclosure dimensions: 13.5"H x 13"W x 3.25"D

* For larger enclosure add suffix "X" to model number (i.e. eFlow4NX)
 Enclosure accommodates two (2) 12VDC/12AH batteries.
 Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

64

Eight (8) Output

eFlow4N8

- UL Listed in the U.S. and Canada for Access Control and Burglar Alarms. UL Listed in the U.S. for Fire. CSFM Approved.
 - 12VDC or 24VDC @ 4 amp total supply current.
 - Eight (8) Class 2 Rated fuse protected power-limited outputs.
- Enclosure dimensions: 13.5"H x 13"W x 3.25"D

eFlow4N8D

- eFlow4N8 with Eight (8) Class 2 Rated PTC protected power-limited outputs.

Features:

- 120VAC 60Hz. input.
- Built-in supervised fire alarm disconnect.
- Additional aux. power-limited output rated @ 1 amp (unswitched).
- Over voltage protection - guards against equipment damage.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Low power cutoff - protects stand-by batteries from deep discharge.
- Power LED visible on the enclosure door.



- AC fail, low battery and battery presence supervision.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.
- Enclosure accommodates up to two (2) 12VDC/7AH batteries.

Monitor and control eFlow Series Power Supply/Chargers with LINQ2 - Network Communication Modules (pg. 34)



ENHANCED POWER SUPPLY/CHARGERS

Single Output

eFlow6N

- UL Listed in the U.S. and Canada for Access Control and Burglar Alarms. UL Listed in the U.S. for Fire. CSFM Approved.
 - 12VDC or 24VDC @ 6 amp total supply current.
- Enclosure dimensions: 13.5"H x 13"W x 3.25"D

* For larger enclosure add suffix "X" to model number (i.e. eFlow6NX)
Enclosure accommodates two (2) 12VDC/12AH batteries.
Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

Eight (8) Output

eFlow6N8

- UL Listed in the U.S. and Canada for Access Control and Burglar Systems. UL Listed in the U.S. for Fire. CSFM Approved.
 - 12VDC or 24VDC @ 6 amp total supply current.
 - Eight (8) fuse protected outputs.
- Enclosure dimensions: 13.5"H x 13"W x 3.25"D

eFlow6N8D

- eFlow6N8 with Eight (8) Class 2 Rated PTC protected power-limited outputs.

Features:

- 120VAC 60Hz. input.
- Built-in supervised fire alarm disconnect.
- Additional aux. power-limited output rated @ 1 amp (unswitched).
- Over voltage protection - guards against equipment damage.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Low power cutoff - protects stand-by batteries from deep discharge.
- Power LED visible on the enclosure door.



- AC fail, low battery and battery presence supervision.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.
- Enclosure accommodates up to two (2) 12VDC/7AH batteries.

Monitor and control eFlow Series Power Supply/Chargers with LINQ2 - Network Communication Modules (pg. 34)



ENHANCED POWER SUPPLY/CHARGERS

Sixteen (16) Output

eFlow6N16

- UL Listed in the U.S. and Canada for Access Control and Burglar Systems. UL Listed in the U.S. for Fire. CSFM Approved.
- 12VDC or 24VDC @ 6 amp total supply current.
- Sixteen (16) fuse protected outputs.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

eFlow6N16D

- eFlow6N16 with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.

Single Output

eFlow102N

- UL Listed in the U.S. and Canada for Access Control and Burglar. UL Listed in the U.S. for Fire. CSFM Approved.
- 12VDC @ 10 amp total supply current.

Enclosure dimensions:
13.5"H x 13"W x 3.25"D



EFLOW102N8

66

Features:

- 120VAC 60Hz. input.
- Built-in supervised fire alarm disconnect.
- Additional aux. power-limited output rated @ 1 amp (unswitched).
- Over voltage protection - guards against equipment damage.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Low power cutoff - protects stand-by batteries from deep discharge.
- Power LED visible on the enclosure door.



- AC fail, low battery and battery presence supervision.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.
- Enclosure accommodates up to two (2) 12VDC/7AH batteries.

Monitor and control eFlow Series Power Supply/Chargers with LINQ2 - Network Communication Modules (pg. 34)



ENHANCED POWER SUPPLY/CHARGERS

Eight (8) Output

eFlow102N8

- UL Listed in the U.S. and Canada for Access Control and Burglar. UL Listed in the U.S. for Fire. CSFM Approved.
- 12VDC @ 10 amp total supply current.
- Eight (8) fuse protected outputs.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

eFlow102N8D

- eFlow102N8 with Eight (8) Class 2 Rated PTC protected power-limited outputs.

Sixteen (16) Output

eFlow102N16

- UL Listed in the U.S. and Canada for Access Control and Burglar. UL Listed in the U.S. for Fire. CSFM Approved.
- 12VDC @ 10 amp total supply current.
- Sixteen (16) fuse protected outputs.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

eFlow102N16D

- eFlow102N16 with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.

Features:

- 120VAC 60Hz. input.
- Built-in supervised fire alarm disconnect.
- Additional aux. power-limited output rated @ 1 amp (unswitched).
- Over voltage protection - guards against equipment damage.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Low power cutoff - protects stand-by batteries from deep discharge.
- Power LED visible on the enclosure door.



- AC fail, low battery and battery presence supervision.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.
- Enclosure accommodates up to two (2) 12VDC/7AH batteries.

Monitor and control eFlow Series Power Supply/Chargers with LINQ2 - Network Communication Modules (pg. 34)



ENHANCED POWER SUPPLY/CHARGERS

Single Output

eFlow104N

- UL Listed in the U.S. and Canada for Access Control and Burglar. UL Listed in the U.S. for Fire. CSFM Approved.
- 24VDC @ 10 amp total supply current.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

* For larger enclosure add suffix "X" to model number (i.e. eFlow104NX)

Enclosure accommodates two (2) 12VDC/12AH batteries.

Enclosure dimensions: 15.5"H x 12.23"W x 4.5"

12VDC & 24VDC Output

eFlow104NK1

- 24VDC up to 10 amp total supply current and 12VDC up to 6 amp total supply current.*

Enclosure dimensions:

13.5"H x 13"W x 3.25"D

*24VDC current availability dependent on 12VDC load.



68

Features:

- 120VAC 60Hz. input.
- Built-in supervised fire alarm disconnect.
- Additional aux. power-limited output rated @ 1 amp (unswitched).
- Over voltage protection - guards against equipment damage.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Low power cutoff - protects stand-by batteries from deep discharge.
- Power LED visible on the enclosure door.



- AC fail, low battery and battery presence supervision.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.
- Enclosure accommodates up to two (2) 12VDC/7AH batteries.

Monitor and control eFlow Series Power Supply/Chargers with LINQ2 - Network Communication Modules (pg. 34)



ENHANCED POWER SUPPLY/CHARGERS

Eight (8) Output

eFlow104N8

- UL Listed in the U.S. and Canada for Access Control and Burglar.
UL Listed in the U.S. for Fire. CSFM Approved.
- 24VDC @ 10 amp total supply current.
- Eight (8) fuse protected outputs.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

eFlow104N8D

- eFlow104N16 with Eight (8) Class 2 Rated PTC protected power-limited outputs.

Sixteen (16) Output

eFlow104N16

- UL Listed in the U.S. and Canada for Access Control and Burglar.
UL Listed in the U.S. for Fire. CSFM Approved.
- 24VDC @ 10 amp total supply current.
- Sixteen (16) fuse protected outputs.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

eFlow104N16D

- eFlow104N16 with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.



EFLOW104N16D

Features:

- 120VAC 60Hz. input.
- Built-in supervised fire alarm disconnect.
- Additional aux. power-limited output rated @ 1 amp (unswitched).
- Over voltage protection - guards against equipment damage.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Low power cutoff - protects stand-by batteries from deep discharge.
- Power LED visible on the enclosure door.
- AC fail, low battery and battery presence supervision.
- Built-in charger for sealed lead acid or gel type batteries.



- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.
- Enclosure accommodates up to two (2) 12VDC/7AH batteries.

Monitor and control eFlow Series Power Supply/Chargers with LINQ2 - Network Communication Modules (pg. 34)

300 SERIES POWER SUPPLY/CHARGERS

Single Output

AL300ULX

- UL Listed in the U.S. and Canada for Access Control. UL Listed in the U.S. for Burglar Alarms, Fire and Nurse Call. CSFM Approved.
- 2.5 amp @ 12VDC or 24VDC.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:

13.5"H x 13"W x 3.25"D

AL300ULXD

- UL Listed in the U.S. and Canada for Access Control. UL Listed in the U.S. for Burglar Alarms, Fire and Nurse Call. CE Approved.
- Selectable Input 115VAC or 220VAC.
- 2.5 amp @ 12VDC or 24VDC.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D



Four (4) Output

AL300ULPD4

- UL Listed in the U.S. and Canada for Access Control. UL Listed in the U.S. for Burglar Alarms, Fire and Nurse Call.
- 2.5 amp @ 12VDC or 24VDC.
- Four (4) Class 2 Rated fuse protected power-limited outputs.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:

13.5"H x 13"W x 3.25"D

AL300ULPD4CB

- AL300ULPD4 with Four (4) Class 2 Rated PTC protected power-limited outputs.

Eight (8) Output

AL300ULPD8

- UL Listed in the U.S. and Canada for Access Control. UL Listed in the U.S. for Burglar Alarms, Fire and Nurse Call.
- 2.5 amp @ 12VDC or 24VDC.
- Eight (8) Class 2 Rated fuse protected power-limited outputs.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:

13.5"H x 13"W x 3.25"D

AL300ULPD8CB

- AL300ULPD8 with Eight (8) Class 2 Rated PTC protected power-limited outputs.

70

Features:

- 115VAC 60Hz input (except for AL300ULXD).
- Class 2 Rated power-limited output(s).
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.



- Automatic switch over to stand-by battery when AC fails.
- AC fail, low battery and battery presence supervision (AL300ULXD has AC fail and low battery supervision only).
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.

* For red enclosure add suffix "R" to model number.

300 SERIES POWER SUPPLY/CHARGERS

Sixteen (16) Output

AL300ULXPD16

- UL Listed in the U.S. and Canada for Access Control.
UL Listed in the U.S. for Burglar Alarms, Fire and Nurse Call.
 - 2.5 amp @ 12VDC or 24VDC.
 - Sixteen (16) Class 2 Rated fuse protected power-limited outputs.
 - Fits two (2) 12VDC/12AH batteries.
- Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

AL300ULXPD16CB

- AL300ULXPD16 with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.

Features:

- 115VAC 60Hz. input.
- Class 2 Rated power-limited output(s).
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC fail, low battery and battery presence supervision.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.

* For red enclosure add suffix "R" to model number.



(Batteries optional - order separately)

400 SERIES POWER SUPPLY/CHARGERS

Single Output

AL400UL

- UL Listed in the U.S. and Canada for Access Control.
UL Listed in the U.S. for Burglar Alarms, Fire and Nurse Call.
CSFM Approved.
- 4 amp @ 12VDC or 3 amp @ 24VDC.
- Single Class 2 Rated power-limited output.
- AC fail and low battery supervision.

Enclosure dimensions: 12.25"H x 7.5"W x 4.5"D

AL400ULX

- UL Listed in the U.S. and Canada for Access Control.
UL Listed in the U.S. for Burglar Alarms, Fire and Nurse Call.
CSFM Approved.
- 4 amp @ 12VDC or 3 amp @ 24VDC.
- Single Class 2 Rated power-limited output.
- AC fail, low battery and battery presence supervision.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

* For red enclosure add suffix "R" to model number.

72

Features:

- 115VAC 60Hz. input.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.

For red enclosure add suffix "R" to model number.



AL400ULX

(Batteries optional - order separately)

400 SERIES POWER SUPPLY/CHARGERS

Four (4) Output

AL400ULPD4

- UL Listed in the U.S. and Canada for Access Control. UL Listed in the U.S. for Burglar Alarms, Fire and Nurse Call.
- 4 amp @ 12VDC or 3 amp @ 24VDC.
- Four (4) Class 2 Rated fuse protected power-limited outputs.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:

13.5"H x 13"W x 3.25"D

AL400ULPD4CB

- AL400ULPD4 with Four (4) Class 2 Rated PTC protected power-limited outputs.

Eight (8) Output

AL400ULPD8

- UL Listed in the U.S. and Canada for Access Control. UL Listed in the U.S. for Burglar Alarms, Fire and Nurse Call.
- 4 amp @ 12VDC or 3 amp @ 24VDC.
- Eight (8) Class 2 Rated fuse protected power-limited outputs.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:

13.5"H x 13"W x 3.25"D

AL400ULPD8CB

- AL400ULPD8 with Eight (8) Class 2 Rated PTC protected power-limited outputs.

Sixteen (16) Output

AL400ULXPD16

- UL Listed in the U.S. and Canada for Access Control. UL Listed in the U.S. for Burglar Alarms, Fire and Nurse Call.
- 4 amp @ 12VDC or 3 amp @ 24VDC.
- Sixteen (16) Class 2 Rated fuse protected power-limited outputs.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions:

15.5"H x 12.23"W x 4.5"D

AL400ULXPD16CB

- AL400ULXPD16 with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.

73

Features:

- 115VAC 60Hz. input.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.



- AC fail, low battery and battery presence supervision.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.

For red enclosure add suffix "R" to model number.

600 SERIES POWER SUPPLY/CHARGERS

AL600ULX

- UL Listed in the U.S. and Canada for Access Control.
UL Listed in the U.S. for Fire. CSFM Approved.
- 6 amp @ 12VDC or 24VDC.
- Single non power-limited output.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

Single Output

AL600ULXD

- UL Listed in the U.S. and Canada for Access Control.
UL Listed in the U.S. for Fire. CE Approved.
- Selectable Input 115VAC or 220VAC.
- 6 amp @ 12VDC or 24VDC.
- Single non power-limited output.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D



74

Features:

- 115VAC 60Hz. input.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC fail, low battery and battery presence supervision.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.

For red enclosure add suffix "R" to model number.



AL600ULX

(Batteries optional - order separately)

600 SERIES POWER SUPPLY/CHARGERS

*Four (4) Output***AL600ULPD4**

- UL Listed in the U.S. and Canada for Access Control. UL Listed in the U.S. for Fire.
- 6 amp @ 12VDC or 24VDC.
- Four (4) fuse protected non power-limited outputs.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:

13.5"H x 13"W x 3.25"D

AL600ULPD4CB

- AL600ULPD4 with Four (4) Class 2 Rated PTC protected power-limited outputs.

*Eight (8) Output***AL600ULPD8**

- UL Listed in the U.S. and Canada for Access Control. UL Listed in the U.S. for Fire
- 6 amp @ 12VDC or 24VDC.
- Eight (8) fuse protected non power-limited outputs.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:

13.5"H x 13"W x 3.25"D

AL600ULPD8CB

- AL600ULPD8 with Eight (8) Class 2 Rated PTC protected power-limited outputs.

*Sixteen (16) Output***AL600ULXPD16**

- UL Listed in the U.S. and Canada for Access Control. UL Listed in the U.S. for Fire
- 6 amp @ 12VDC or 24VDC.
- Sixteen (16) fuse protected non power-limited outputs.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions:

15.5"H x 12.23"W x 4.5"D

AL600ULXPD16CB

- AL600ULPD16 with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.

75

Features:

- 115VAC 60Hz. input.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.



- AC fail, low battery and battery presence supervision.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.

For red enclosure add suffix "R" to model number.

1024 SERIES POWER SUPPLY/CHARGERS

Single Output

AL1024ULX

- UL Listed in the U.S. and Canada for Access Control. UL Listed in the U.S. for Fire. CSFM and FM Approved.
- 10 amp @ 24VDC supply current.
- Single non power-limited output.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions:

15.5"H x 12.23"W x 4.5"D

Four (4) Output

AL1024ULXPD4

- UL Listed in the U.S. and Canada for Access Control. UL Listed in the U.S. for Fire.
- 10 amp @ 24VDC supply current.
- Four (4) fuse protected non power-limited outputs.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions:

15.5"H x 12.23"W x 4.5"D

AL1024ULXPD4CB

- AL1024ULXPD4 with Four (4) Class 2 Rated PTC protected power-limited outputs.

Eight (8) Output

AL1024ULXPD8

- UL Listed in the U.S. and Canada for Access Control. UL Listed in the U.S. for Fire.
- 10 amp @ 24VDC supply current.
- Eight (8) fuse protected non power-limited outputs.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions:

15.5"H x 12.23"W x 4.5"D

AL1024ULXPD8CB

- AL1024ULXPD8 with Eight (8) Class 2 Rated PTC protected power-limited outputs.

76

Features:

- 115VAC 60Hz. input.
- 8 amp @ 24VDC supply current with 10 amp during alarm for fire alarm applications.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC fail, low battery and battery presence supervision.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.

For red enclosure add suffix "R" to model number.



(Batteries optional - order separately)



AL1024ULXPD8

1024 SERIES POWER SUPPLY/CHARGERS

Sixteen (16) Output

AL1024ULXPD16

- UL Listed in the U.S. and Canada for Access Control.
UL Listed in the U.S. for Fire.
- 10 amp @ 24VDC supply current.
- Sixteen (16) fuse protected non power-limited outputs.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

Features:

- 115VAC 60Hz. input.
- 8 amp @ 24VDC supply current with 10 amp during alarm for fire alarm applications.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC fail, low battery and battery presence supervision.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.

For red enclosure add suffix "R" to model number.



AL1024ULXPD16CB

- AL1024ULXPD16 with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.



AL1024ULXPD16

(Batteries optional - order separately)

POWER DISTRIBUTION MODULE WITH FIRE ALARM INTERFACE

MOM5

- UL Listed Sub-Assembly in the U.S. and Canada for Access Control. UL Listed in the U.S. for Fire.
 - Current limit is 2 amp @ 12VDC or 24VDC per output.
 - Five (5) Class 2 Rated PTC protected power-limited outputs.
- Board dimensions: 3.5"L x 5.25"W x 1"H



MOM5C


- UL Listed Sub-Assembly in the U.S. and Canada for Access Control. UL Listed in the U.S. for Fire. CSFM Approved.
 - Current limit is 2 amp @ 12VDC or 24VDC per output.
 - Five (5) Class 2 Rated PTC protected power-limited outputs.
- Enclosure dimensions: 8.5"H x 7.25"W x 3.5"D



Features:

- Provides power for Fail-Safe and/or Fail-Secure locking devices.
- Fire Alarm Panel or Access Control System trigger inputs. [NO] or [NC] supervised trigger input and/or polarity reversal trigger.
- Red LED's indicate condition of each power output.
- Power & input trigger LED's.

78

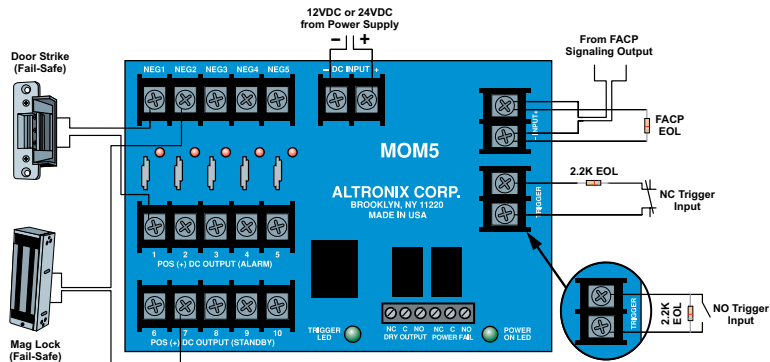

POWER SUPPLY/CHARGERS WITH FIRE ALARM INTERFACE

Five (5) Output

AL300ULM

- UL Listed in the U.S. and Canada for Access Control. UL Listed in the U.S. for Burglar Alarms, Fire and Nurse Call. CSFM Approved.
- 2.5 amp @ 12VDC or 24VDC.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:
13.5"H x 13"W x 3.25"D

AL400ULM

- UL Listed in the U.S. and Canada for Access Control. UL Listed in the U.S. for Burglar Alarms, Fire and Nurse Call. CSFM Approved.
- 4 amp @ 12VDC or 3 amp @ 24VDC.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:
13.5"H x 13"W x 3.25"D

AL600ULM

- UL Listed in the U.S. and Canada for Access Control. UL Listed in the U.S. for Fire. CSFM Approved.
- 6 amp @ 12VDC or 24VDC.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:
13.5"H x 13"W x 3.25"D

AL1024ULM

- UL Listed in the U.S. and Canada for Access Control. UL Listed in the U.S. for Fire. CSFM Approved.
- Access Control Applications:
10 amp @ 24VDC supply current.
Fire Alarm Applications:
8 amp @ 24VDC supply current with 10 amp during alarm.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions:
15.5"H x 12.23"W x 4.5"D

* For red enclosure add suffix "R" to model number.

AL600ULM



(Batteries optional - order separately)

Features:

- Five (5) Class 2 Rated PTC protected power-limited outputs.
- Provides power for Fail-Safe and/or Fail-Secure locking devices.
- Fire Alarm Panel or Access Control System trigger inputs. [NO] or [NC] supervised trigger input and/or polarity reversal trigger.
- Red LED's indicate condition of each power output.
- Power & input trigger LED's.
- Filtered and electronically regulated outputs.
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- Zero voltage drop upon transfer to battery backup.
- Automatic switch over to stand-by battery when AC fails.
- AC fail, low battery, and battery presence supervision.
- AC input and DC output LED indicators.
- Includes cam lock and battery leads.



FACP ADAPTERS FOR NETWORK IP DOOR CONTROLLERS

Entrada2DMK (kit)

- UL Listed in the U.S. and Canada for Access Control, and Information Technology Equipment, CSFM and CE Approved.
- Facilitates the release of locking devices in the event of a fire alarm condition without the added costs of running additional cables and having to deploy more power supplies and fire relays.
- Supervised (N.O. or N.C.) fire alarm disconnect releases locking devices while maintaining PoE to the network door controller(s).
- A single FACP connection links multiple units.
- Fire Alarm Disconnect is selectable by output.
- Power outputs are selectable for 12VDC or 24VDC mag locks or strikes.


- Total current available: 1250mA @ 12VDC or 625mA @ 24VDC.
- Two (2) independent 12VDC-24VDC access control trigger inputs.
- PoE+ (802.3at) compliant.
- Built-in overload protection.
- Electronically filtered and regulated outputs.
- Transmitter provides power and data for network door controllers.
- Includes one (1) Entrada2DMR Receiver and one (1) Entrada2DMT Transmitter.

Entrada2DMT

- IP Access Transmitter.

80

TYPICAL APPLICATION:

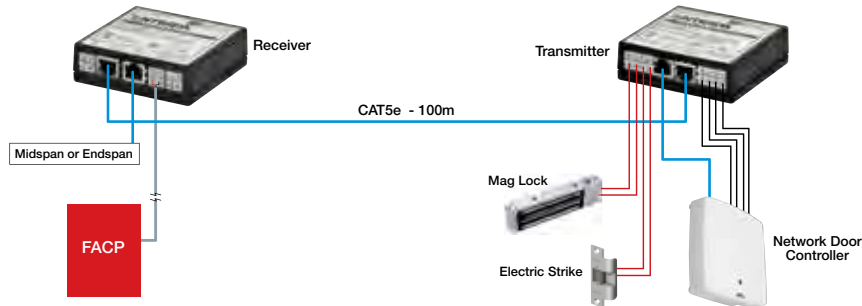



NETWORKED NAC POWER EXTENDERS

 **FIRE SWITCH**[®]

Outputs are programmable for
8 Class B, 4 Class A or Aux power.

NETWORKED NAC POWER EXTENDERS

FireSwitch108

- UL Listed in the U.S. and Canada for Fire, CSFM Approved.
 - 24VDC voltage regulated power-limited NAC outputs.
 - Power outputs are programmable as:
 - Eight (8) Class B NAC outputs
 - Four (4) Class A NAC outputs
 - Aux. power outputs
 - Any combination of the above.
 - 2.5 amp max current per output.
 - One (1) Aux. output rated at 1 amp.
- Output power:
 - 10 amp max total alarm current
 - 7 amp max stand-by without battery backup
 - 1 amp with battery backup including dedicated aux. output
 - Two (2) configurable inputs trigger via Class A or Class B FACP signal circuits (polarity reversal) or dry contacts.
 - Fits two (2) 12VDC/12AH batteries.
- Enclosure dimensions:
15.5"H x 12.23"W x 4.5"D

82

Features:

- LCD display and ethernet port facilitates local or remote programming and status monitoring.
- EOL resistor value programmable by output.
- Battery presence and low battery supervision.
- Signal circuit trouble memory - facilitates quickly locating intermittent system trouble and eliminates costly and unnecessary service calls.
- 2-wire horn/strobe sync mode allows audible notification appliances (horns) to be silenced while visual notification appliances (strobes) continue to operate.
- Built-in Cooper®, Gentex®, Potter® and System Sensor® sync protocols.
- Temporal Code 3, Steady Mode, Input to Output Follower Mode.
- Temporal Code 4 for system CO alarms.
- Thermal and short circuit protection with auto reset.
- Compatible with 12VDC or 24VDC fire panels.
- Common trouble inputs and outputs.
- Ground fault detection.
- AC fail, low battery and battery presence supervision.
- 115VAC 60Hz. input.
- Includes cam lock and battery leads.



NAC POWER EXTENDERS

AL602ULADA

- UL Listed in the U.S. for Fire, UL 864 9th edition, CSFM and FM Approved.
- 6.5 amp @ 24VDC.
- Two (2) Class A or four (4) Class B outputs with built-in sync protocols.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions:

15.5"H x 12.23"W x 4.5"D

AL802ULADA

- UL Listed in the U.S. for Fire, UL 864 9th edition, CSFM and FM Approved.
- 8 amp @ 24VDC.
- Two (2) Class A or four (4) Class B outputs with built-in sync protocols.
- Two (2) NC dry contact trigger inputs.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions:

15.5"H x 12.23"W x 4.5"D

AL1002ULADA

- UL Listed in the U.S. for Fire, UL 864 9th edition, CSFM and FM Approved.
- 10 amp @ 24VDC.
- Two (2) Class A or four (4) Class B outputs with built-in sync protocols.
- Two (2) NC dry contact trigger inputs.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions:

15.5"H x 12.23"W x 4.5"D

Features:

- Two (2) Class A or two (2) Class B FACP inputs.
- Two (2) NC dry contact trigger inputs.
- Two (2) Class B outputs may be paralleled for more power on an indicating circuit.
- One (1) aux. power output @ 1 amp supply current (with battery back up).
- Signal circuit trouble memory - facilitates quickly locating intermittent system trouble and eliminates costly and unnecessary service calls. LEDs indicate a prior fault (short, open, ground) has occurred on one or more signaling circuit outputs.
- 2-wire horn/strobe sync mode allows audible notification appliances (horns) to be silenced while visual notification appliances (strobes) continue to operate.
- Built-in Cooper®, Gentex®, Potter® and System Sensor® sync protocols.

- Temporal Code 3, Steady Mode, Input to Output Follower Mode (maintains synchronization of notification appliance circuits).
- Compatible with 12VDC or 24VDC fire panels.
- Common trouble inputs and outputs.
- Ground fault detection.
- AC fail, low battery and battery presence supervision.
- 115VAC 60Hz. input.
- Includes cam lock and battery leads.



(Batteries optional - order separately)

All above models are available in larger enclosure.
Add suffix "J" to model number (i.e. AL802ULADAJ).

NAC POWER EXTENDERS

AL642ULADA

- UL Listed in the U.S. for Fire, UL 864 9th edition, CSFM and FM Approved.
- 6.5 amp @ 24VDC.
- Four (4) Class A or four (4) Class B outputs with built-in sync protocols.
- Fits two (2) 12VDC/17AH batteries.

Enclosure dimensions:
18"H x 14.5"W x 4.625"D

AL842ULADA

- UL Listed in the U.S. for Fire, UL 864 9th edition, CSFM and FM Approved.
- 8 amp @ 24VDC.
- Four (4) Class A or four (4) Class B outputs with built-in sync protocols.
- Fits two (2) 12VDC/17AH batteries.

Enclosure dimensions:
18"H x 14.5"W x 4.625"D

AL1042ULADA

- UL Listed in the U.S. for Fire, UL 864 9th edition, CSFM and FM Approved.
- 10 amp @ 24VDC.
- Four (4) Class A or four (4) Class B outputs with built-in sync protocols.
- Fits two (2) 12VDC/17AH batteries.


Enclosure dimensions:
18"H x 14.5"W x 4.625"D

Features:

- Two (2) Class A or two (2) Class B FACP inputs.
- Two (2) NC dry contact trigger inputs.
- Two (2) Class B outputs may be paralleled for more power on an indicating circuit.
- One (1) aux. power output @ 1 amp supply current (with battery back up).
- One (1) aux. power output @ 1 amp supply current (without battery back up).
- Signal circuit trouble memory-facilitates quickly locating intermittent system trouble and eliminates costly and unnecessary service calls. LEDs indicate a prior fault (short, open, ground) has occurred on one or more signaling circuit outputs.
- 2-wire horn/strobe sync mode allows audible notification appliances (horns) to be silenced while visual notification appliances (strobes) continue to operate.
- Built-in Cooper®, Gentex®, Potter® and System Sensor® sync protocols.

- Temporal Code 3, Steady Mode, Input to Output Follower Mode (maintains synchronization of notification appliance circuits).
- Compatible with 12VDC or 24VDC fire panels.
- Ground fault detection.
- AC fail, low battery and battery presence supervision.
- 115VAC 60Hz. input.
- Includes cam lock and battery leads.

AL842ULADA



(Batteries optional - order separately)

LONG RANGE ETHERNET ADAPTERS



RACE[™]

Extend ethernet range 5x
the distance without repeaters



EXTEND ETHERNET RANGE 5X THE DISTANCE

Long Range Ethernet Adapters - Pass PoE/PoE+

Pace1PRMT (kit)

- UL Listed in the U.S. & Canada for I.T.E., CE & C-Tick Approved.
- Single port extended ethernet kit.
- Units also support single UTP up to 150m.
- Includes one (1) *Pace1PRM* receiver and one (1) *Pace1PTM* transceiver - may be ordered separately.



PACE1PRMT

Pace1STR (kit)

- UL Listed in the U.S. & Canada for I.T.E., CE & C-Tick Approved.
- Single port extended ethernet kit.
- Includes one (1) *Pace1PRM* receiver and one (1) *Pace1ST* mini transceiver - may be ordered separately.



PACE1STR

86

Features:

- Deploy IP cameras/edge devices up to 500m over CAT5e without repeaters.
- Data rate 100Mbps full duplex.
- Passes PoE/PoE+ generated from midspan/endspan.




- Multi-port units compatible with *Pace1PTM* & *Pace1ST* transceiver.
- PoE (802.3af) and PoE+ (802.3at) compliant.
- Auto detection and protection of legacy non-PoE cameras/devices.
- LEDs indicate power, activity and link status.




EXTEND ETHERNET RANGE 5X THE DISTANCE

Pace1PRMT UTP Application:

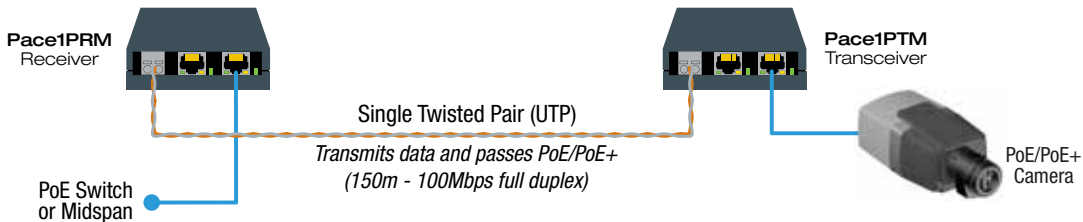

87

Pace1PRMT CAT5e Application:

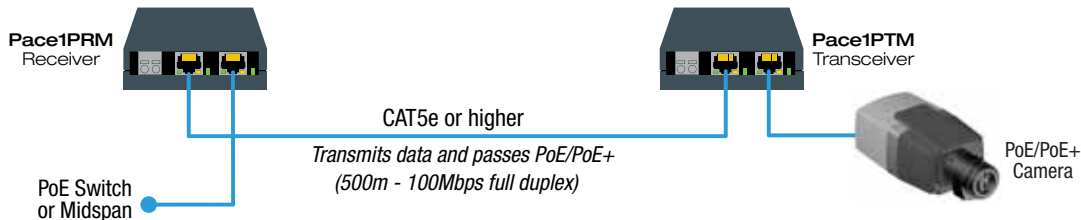



EXTEND ETHERNET RANGE 5X THE DISTANCE

Long Range Ethernet Adapters - Pass PoE/PoE+

Pace4PRM

- UL Listed in the U.S. & Canada for I.T.E., CE & C-Tick Approved.
- Four (4) port receiver.



PACE4PRM

Pace8PRM

- UL Listed in the U.S. & Canada for I.T.E., CE & C-Tick Approved.
- Eight (8) port receiver.



PACE16PRM

Pace16PRM

- UL Listed in the U.S. & Canada for I.T.E., CE & C-Tick Approved.
- Sixteen (16) port receiver.

Compatible Transceivers:

Pace1PTM

- Single port transceiver.
- Operates with single and multi-port Pace receivers.
- Also supports single UTP up to 150m.
- Hardened to operate at wider temperature range.

Dimensions: 3.5"W x 3.5"D x 1"H



PACE1PTM

Pace1ST

- Single port mini transceiver.
- More compact design for tighter spaces.
- Operates with single and multi-port Pace receivers.
- Hardened to operate at wider temperature range.

Dimensions: 2.27"W x 2.645"D x 1.12"H



PACE1ST

88

Features:

- Deploy IP cameras/edge devices up to 500m over CAT5e without repeaters.
- Data rate 100Mbps full duplex.
- Passes PoE/PoE+ generated from midspan/endspan.



- PoE (802.3af) and PoE+ (802.3at) compliant.
- Auto detection and protection of legacy non-PoE cameras/devices.
- LEDs indicate power, activity and link status.



eBridge[™]
PLUS

ETHERNET OVER COAX SOLUTIONS

Upgrade to IP utilizing coax,
saving time and labor


eBridge^{PLUS} ETHERNET OVER COAX

Managed Ethernet over Coax PoE+ Switch (25Mbps)

eBridge8E

- Eight (8) port receiver with Integral PoE+ Switch.
- Data rate 25Mbps.
- One (1) Gigabit Uplink.
- 30W full power per port (240W of total power).

90

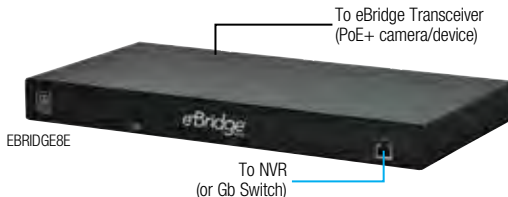

Compatible Transceivers:

eBridge1PCTX

- Single port transceiver.
- Operates with single and multi-port eBridge (25Mbps) receivers.
- Hardened to operate at wider temperature range.

eBridge1ST

- Single port mini transceiver.
- More compact design for tighter spaces.
- Operates with single and multi-port eBridge (25Mbps) receivers.
- Hardened to operate at wider temperature range.



Features:

- Deploy IP cameras/edge devices up to 500m over coax without repeaters.
- Generates PoE/PoE+ up the coax to an eBridge transceiver.
- Eliminates the costs and labor associated with installing new network cabling.
- Control, monitor and report power/diagnostics from anywhere over the network.



- Built-in battery charger
(Optional rack mount battery enclosure available - model RE2)
- 115VAC/230VAC input.
- Compact 1U EIA 19" rack mount chassis.

eBridge^{PLUS} ETHERNET OVER COAX

Managed Ethernet over Coax PoE+ Switch (100Mbps)

eBridge800E

- Eight (8) port receiver with Integral PoE+ Switch.
- Data rate 100Mbps.
- Two (2) 1 Gigabit Uplink.
- 30W full power per port (240W of total power).

To NVR
(or Gb Switch)



To eBridge Transceiver
(PoE+ camera/device)

EBRIDGE800E

Compatible Transceivers:

eBridge100TM

- Single port transceiver.
- Operates with single and multi-port eBridge (100Mbps) receivers.
- Hardened to operate at wider temperature range.

eBridge100ST

- Single port mini transceiver.
- More compact design for tighter spaces.
- Operates with single and multi-port eBridge (100Mbps) receivers.
- Hardened to operate at wider temperature range.



EBRIDGE100ST

91

Features:

- Deploy IP cameras/edge devices up to 300m over coax without repeaters.
- Generates PoE/PoE+ up the coax to an eBridge transceiver.
- Eliminates the costs and labor associated with installing new network cabling.
- Control, monitor and report power/diagnostics from anywhere over the network.
- Built-in battery charger
- (Optional rack mount battery enclosure available - model RE2)
- 115VAC/230VAC input.
- Compact 1U EIA 19" rack mount chassis.



eBridge™ PLUS

ETHERNET OVER COAX

EoC Adapters - Pass PoE/PoE+ (100Mbps)

eBridge100RMT (kit)

- UL Listed in the U.S. & Canada for I.T.E., CE & C-Tick Approved.
- Single port EoC adapter kit.
- Includes one (1) eBridge100RM receiver and one (1) eBridge100TM transceiver - may be ordered separately.

eBridge100STR (kit)

- UL Listed in the U.S. & Canada for I.T.E., CE & C-Tick Approved.
- Single port EoC adapter kit.
- Includes one (1) eBridge100RM receiver and one (1) eBridge100ST mini transceiver - may be ordered separately.

92

Features:

- Deploy IP cameras/edge devices up to 300m over coax without repeaters.
- Cost effective solution to upgrade and expand security and surveillance utilizing coax.
- Eliminates labor and costs of deploying new cable.
- Data rate 100Mbps full duplex.
- Passes PoE/PoE+ generated from midspan.
- IEEE 802.3af (15W) and IEEE 802.3at (30W) compliant.
- Hardened to operate at wider temperature range.
- LEDs indicate Power, Coax link and IP link status.



Receivers:

eBridge100RM

- Single port receiver.

eBridge400PCRM

- Four (4) port receiver.

eBridge800PCRM

- Eight (8) port receiver.

eBridge1600PCRM

- Sixteen (16) port receiver.



EBRIDGE400PCRM



EBRIDGE800PCRM

Transceivers:

eBridge100TM

- Single port transceiver.
- Operates with single and multi-port eBridge (100Mbps) receivers.

eBridge100ST

- Single port mini transceiver.
- Operates with single and multi-port eBridge (100Mbps) receivers.
- More compact design for tighter spaces.

eBridge^{PLUS} ETHERNET OVER COAX/CAT5E

EoC/CAT5e Outdoor Solution (100Mbps)

eBridge200WPM

- UL Listed in the U.S. and Canada for I.T.E., CE Approved.
- Two (2) port Transceiver supports a single Hi-PoE (60W) camera/device or two (2) PoE+ cameras/devices over CAT5e/6 or coax.
- Passes PoE, PoE+ or Hi-PoE (60W).
- Built-in IP management allows for remote camera reset, monitoring and reporting via various IP protocols.
- System events report via Email and SNMP trap message notifications (instant or delayed).

eBridge200WPMH

- eBridge200WPM with three (3) 5/8" wiring inlets, includes NEMA rated glands.

Features:

- Deploy IP cameras/edge devices up to 300m over coax or 500m over CAT5e without repeaters.
- Cost effective solution to upgrade and expand security and surveillance utilizing coax or CAT5e (or higher).
- Data rate 100Mbps full duplex.
- IEEE 802.3af (15W) and IEEE 802.3at (30W) and Hi-PoE (60W) compliant.
- Eliminates labor and costs of deploying new cable.



eBridge200WPM compatible Receivers:

eBridge100SPR

- Single port receiver required for PoE/PoE+ or Hi-PoE Coax applications.

Pace1PRM

- Single port receiver required for PoE/PoE+ CAT5 applications.

Pace1PRD

- Single port receiver required for Hi-PoE CAT5 applications.

NetWay1D

- Single port injector required for Hi-PoE applications.

93




EBRIDGE200WPM


PMK1 - Pole Mount Kit available, see page 149

eBridge^{PLUS} ETHERNET OVER COAX

TYPICAL APPLICATIONS:

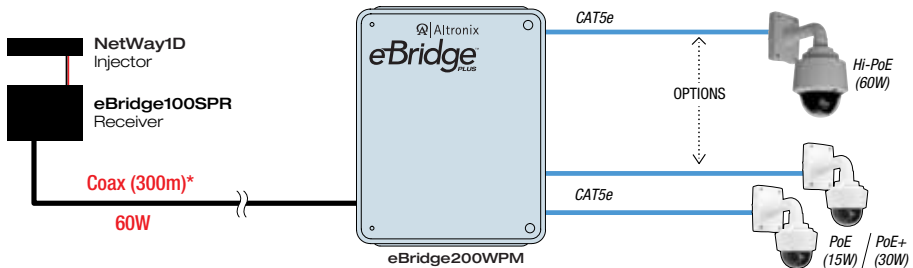

94

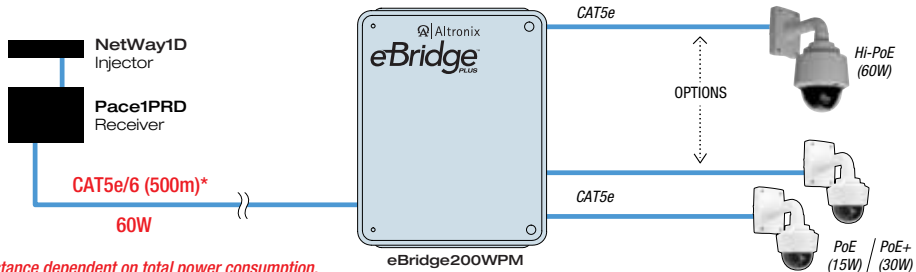

*Distance dependent on total power consumption.

eBridge^{PLUS} ETHERNET OVER COAX

Single Port Ethernet over Coax Adapters (25Mbps)

eBridge1PCRT (EoC kit provides PoE)

- UL Listed in the U.S. & Canada for I.T.E., CE and C-Tick Approved.
- IEEE 802.3af (15.4W) compliant.
- Operates at 24VAC or 24VDC.
- Includes one (1) eBridge1PCR receiver and one (1) eBridge1PCT transceiver - may be ordered separately.

eBridge1PCRTX (EoC kit provides PoE+)

- UL Listed in the U.S. & Canada for I.T.E., CE and C-Tick Approved.
- IEEE 802.3af (15.4W) and IEEE 802.3at (30W) compliant.
- Operates at 24VDC to 56VDC.
- Includes one (1) eBridge1PCR receiver and one (1) eBridge1PCTX transceiver - may be ordered separately.

eBridge1STR (EoC kit passes PoE+)

- UL Listed in the U.S. & Canada for I.T.E., CE and C-Tick Approved.
- IEEE 802.3af (15.4W) and IEEE 802.3at (30W) compliant.
- Includes one (1) eBridge1PCR receiver and one (1) eBridge1ST transceiver - may be ordered separately

eBridge1PCRMT (EoC kit passes PoE+)

- UL Listed in the U.S. & Canada for I.T.E., CE and C-Tick Approved.
- IEEE 802.3af (15.4W) and IEEE 802.3at (30W) compliant.
- Designed to pass PoE/PoE+ up the coax from any midspan or endspan.
- Includes one (1) eBridge1PCR receiver and one (1) eBridge1PCTX transceiver - may be ordered separately.

95

Features:

- Transmits IP video/data and power over existing coax cable up to 500m without repeaters.
- Eliminates labor and costs of deploying new cable.
- Hardened to operate at wider temperature range.
- Supports IP cameras and access control devices.
- Incorporates *sloc™ (Security Link over Coax) technology.
- Throughput is rated to pass 25mbps of data.




- Ethernet Speed: 10/100BaseT, half/full duplex, auto negotiation.
- Connectivity: RJ45, auto-cross-over.
- LEDs indicate Power, Coax link and IP link status.

* sloc is a registered trademark of Intersil Corporation.




eBridge^{PLUS} ETHERNET OVER COAX

eBridge100STR Application:

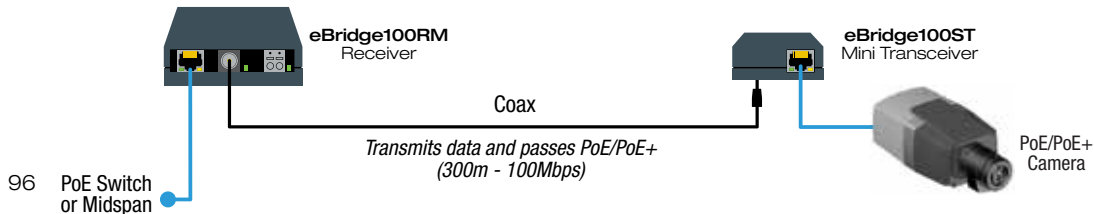

eBridge1PCRTX Application:

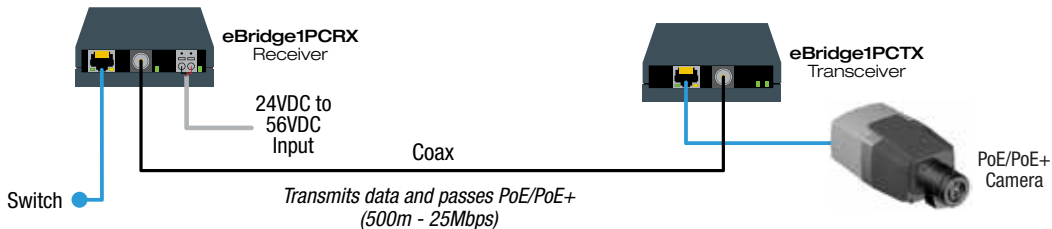

eBridgeTM PLUS ETHERNET OVER COAX

Single Port Ethernet over Coax Adapters (25Mbps)

Receivers:

eBridge1PCR (Provides PoE)

- UL Listed in the U.S. & Canada for I.T.E., CE and C-Tick Approved.
- IEEE 802.3af (15.4W) compliant.
- Operates at 24VAC or 24VDC.

eBridge1PCRX (Provides PoE+)

- UL Listed in the U.S. & Canada for I.T.E., CE and C-Tick Approved.
- IEEE 802.3af (15.4W) and IEEE 802.3at (30W) compliant.
- Operates at 24VDC to 56VDC.

eBridge1PCRM (Passes PoE+)

- UL Listed in the U.S. & Canada for I.T.E., CE and C-Tick Approved.
- IEEE 802.3af (15.4W) and IEEE 802.3at (30W) compliant.
- Designed to pass PoE/PoE+ up the coax from any midspan or endspan.

Transceivers:

eBridge1PCT (PoE compliant)

- UL Listed in the U.S. & Canada for I.T.E., CE and C-Tick Approved.
- IEEE 802.3af (15.4W) compliant.

eBridge1PCTX (PoE+ compliant)

- UL Listed in the U.S. & Canada for I.T.E., CE and C-Tick Approved.
- IEEE 802.3af (15.4W) and IEEE 802.3at (30W) compliant.

eBridge1ST (PoE+ compliant)

- UL Listed in the U.S. & Canada for I.T.E., CE and C-Tick Approved.
- IEEE 802.3af (15.4W) and IEEE 802.3at (30W) compliant.
- More compact design for tighter spaces.

97

Features:

- Transmits IP video/data **and power** over existing coax cable up to 500m without repeaters.
- Eliminates labor and costs of deploying new cable.
- Hardened to operate at wider temperature range.
- Supports IP cameras and access control devices.



- Incorporates ***slocTM** (Security Link over Coax) technology.
- Throughput is rated to pass 25mbps of data.
- Ethernet Speed: 10/100BaseT, half/full duplex, auto negotiation.
- Connectivity: RJ45, auto-crossover.
- LEDs indicate Power, Coax link and IP link status.

* sloc is a registered trademark of Intersil Corporation.

eBridge^{PLUS} ETHERNET OVER COAX

Ethernet over Coax/PoE Receivers (25Mbps)

eBridge4PCRX

- UL Listed in the U.S. and Canada for I.T.E., CE Approved, C-Tick Approved.
- Four (4) port receiver.
- IEEE 802.3af (15.4W) and IEEE 802.3at (30W) compliant.



EBRIDGE4PCRX

eBridge8PCRX

- UL Listed in the U.S. and Canada for I.T.E., CE Approved, C-Tick Approved.
- Eight (8) port receiver.
- IEEE 802.3af (15.4W) and IEEE 802.3at (30W) compliant.
- Compact 1U EIA 19" rack mount chassis.



EBRIDGE8PCRX

eBridge16PCRX

- UL Listed in the U.S. and Canada for I.T.E., CE Approved, C-Tick Approved.
- Sixteen (16) port receiver.
- IEEE 802.3af (15.4W) and IEEE 802.3at (30W) compliant.
- Compact 1U EIA 19" rack mount chassis.

98

Features:

- Transmits IP video/data and power over existing coax cable up to 500m without repeaters.
- Ethernet port facilitates programming and status monitoring via LAN or laptop.
- Eliminates labor and costs of deploying new cable.
- Supports IP cameras and access control devices.
- Throughput is rated to pass 25Mbps of data.



- Multi-port Receivers are compatible with eBridge1PCTX and eBridge1ST transceiver (pg. 89).
- Ethernet Speed: 10/100BaseT, half/full duplex, auto negotiation.
- Connectivity: RJ45, auto-crossover.
- LEDs indicate Power, Coax link and IP link status.
- Input: 48VDC - 56VDC (use 54V to 56V power supply to achieve full power per .3at standard).

* sloc is a registered trademark of Intersil Corporation.

eBridge™ ETHERNET OVER COAX

Ethernet over Coax Adapters w/composite video connector

eBridge1CRT

- Single port adapter kit.
- UL Listed in the U.S. and Canada for I.T.E., CE Approved, C-Tick Approved.
- Ethernet Distance: up to 100m.
- Powered via 12/24VDC or 16-24VAC.
- Includes one (1) eBridge1CR receiver and one (1) eBridge1CT transceiver - may be ordered separately.

eBridge1CR

- Single port receiver.

eBridge1CT

- Single port transceiver.



EBRIDGE1CRT

Ethernet over Coax Receivers

eBridge4CR

- UL Listed in the U.S. and Canada for I.T.E., CE Approved, C-Tick Approved.
- Four (4) port receiver.

EBRIDGE4CR



eBridge16CR

- UL Listed in the U.S. and Canada for I.T.E., CE Approved, C-Tick Approved.
- Sixteen (16) port receiver.
- Compact 1U EIA 19" rack mount chassis.

Features:

- Transmits IP video/data over existing coax cable up to 500m without repeaters.
- Allows easy upgrade of legacy coax infrastructure.
- Accommodates individual IP camera(s) with composite video, or multiple IP cameras over a single coax cable.
- Powered via 12/24VDC or 16-24VAC.
- Ethernet Distance: up to 100m



- Incorporates *sloc™ (Security Link over Coax) technology.
- Throughput is rated to pass 25mbps of data.
- Ethernet Speed: 10/100BaseT, half/full duplex, auto negotiation.
- LEDs indicate Power, Coax link and IP link status.
- Composite video connector(s) - enables simultaneous composite video and IP data.

* sloc is a registered trademark of Intersil Corporation.

eBridge[™] PLUS ETHERNET OVER COAX

EoC Kit Enables Four (4) IP Devices Over a Single Coax

eBridge4SK (kit)

- Includes an eBridge100SPR and an eBridge4SPT
- UL Listed in the U.S. and Canada for I.T.E., CE Approved, C-Tick Approved.



EBRIDGE4SK

Features:


- Transmits up to four (4) IP video/data signals over a single coax up to 300m (3 times max. ethernet distance).
- Facilitates system upgrades from a single analog camera/devices up to four (4) IP cameras/devices.
- Eliminates labor and costs of deploying new cable.
- Built-in IP management, allowing for remote camera reset, monitoring and reporting via various IP protocols.



- PoE (IEEE 802.3af) and PoE+ (IEEE 802.3at) compliant.
- Supports IP cameras, accessories and access control devices.
- Data rate 100Mbps full duplex.
- Ethernet Speed: 100BaseT, full duplex, auto negotiation.
- LEDs indicate Power, Coax link and IP link status.
- Input: 48VDC - 56VDC (use 54V to 56V power supply to achieve full power per 802.3at standard).

100

TYPICAL APPLICATION:

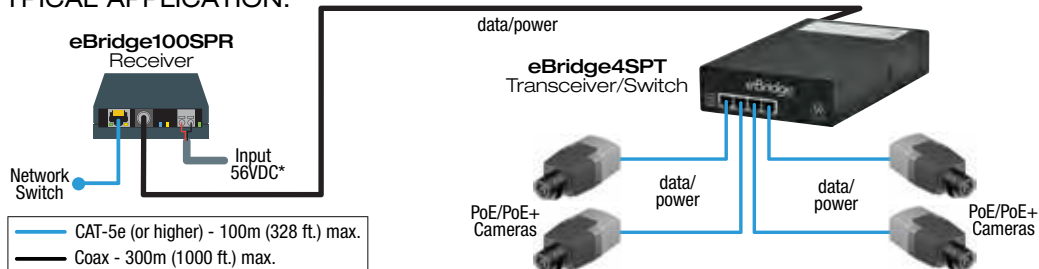

VERTILINE[®] 56VDC POWER SUPPLY/CHARGER

VertiLine563

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- Two (2) 56VDC power outputs @ 3 amp max. each.
- Two (2) separate battery charging circuits.



Features:

- Provides power for single or multi-port eBridgePLUS receivers or 56VDC devices.
- Power LED indicators.
- Automatic switch over to stand-by battery when AC fails.
- Built-in charger for sealed lead acid or gel type batteries.




- Optional rack mount battery enclosure (RE2) can be used to accommodate up to four (4) 12VDC/7AH batteries.
- IEC 320 - 3-wire grounded line cord (detachable).
- Compact 1U EIA 19" rack mount chassis.
- Units can be rack, shelf or wall mounted.

TYPICAL APPLICATION:

VertiLine563

Power Supply/Charger
(rear of unit)

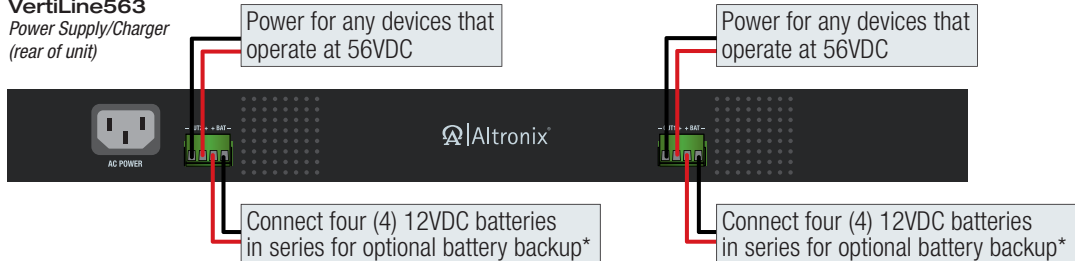

*Altronix offers Rack Mount Battery Enclosure - model **RE2** - to accommodate installation (refer to pg. 178)



ETHERNET TO FIBER SOLUTIONS

Netway
SPECTRUM

Indoor/Outdoor PoE Switches
& Media Converters

Netway[®] FIBER SOLUTIONS

SPECTRUM

Four (4) Port Media Converter

NetWaySP4

- Four (4) Gigabit SFP ports (uplink).
- Power input terminals support 48-56VDC up to 120W or ethernet port (PoE, PoE+ or Hi-PoE 60W).



Features:

- UL Listed in the U.S. and Canada for Information Technology Equipment, CE Approved.
- Port status LED indicators.
- Compact 1U EIA 19" rack mount chassis.
- Units can be rack, shelf or wall mounted.



Four (4) Port Media Converter with Built-in Power Supply/Charger

NetWaySP4P

- 120W max per output (240W total).
- Four (4) Gigabit SFP ports (uplink).
- Built-in battery charger (Optional rack mount battery enclosure available - model RE2)
- AC power LED indicator.
- 115VAC/230VAC input.



103

NetWaySP4P2

- NetWaySP4P with Class 2 power-limited outputs 60W max per output (240W total).

NETWAYSP4P

SFP Modules

P1MM

- Hot-pluggable SFP Module to be used with multi-mode fiber.
- Spans distances up to 550m (1804 ft.).
- Data rate: 1.25Gbps.
- Connector type: LC Duplex.




P1MM

P1SM10

- Hot-pluggable SFP Module to be used with single-mode fiber.
- Spans distances up to 10,000m (32,800 ft.).
- Data rate: 1.25Gbps.
- Connector type: LC Duplex.

Netway SPECTRUM FIBER SOLUTIONS

TYPICAL APPLICATIONS:

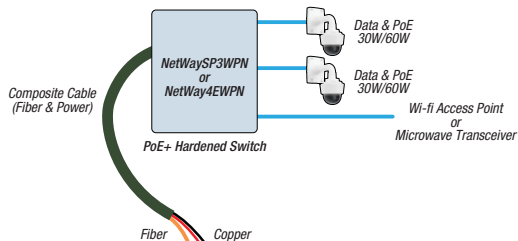


104

NetWaySP4P- Front Panel



NetWaySP4P - Rear Panel

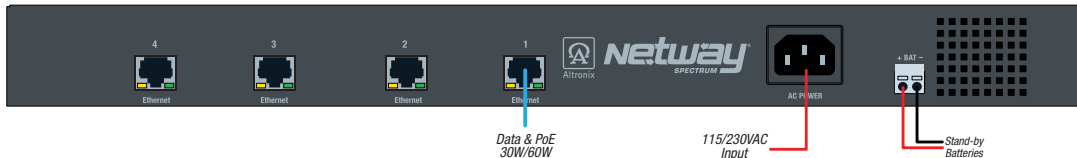

Netway[®] FIBER SOLUTIONS

SPECTRUM

Single Port Ethernet to Fiber Media Converter/Repeater

NetWaySP1A

- One (1) Gigabit SFP port (uplink).
- IEEE 802.3af (15W) compliant.



Features:


- UL Listed in the U.S. and Canada for Information Technology Equipment, CE Approved.
- One (1) 10/100/1000 Mbps.

- LED indicators PoE present (unit is powered on) and bLink signal indicates SFP connection.
- Dimensions (W x L x H) 3.8" x 2.5" x 1" (96.52mm x 63.5mm x 25.4mm).



105

TYPICAL APPLICATION:

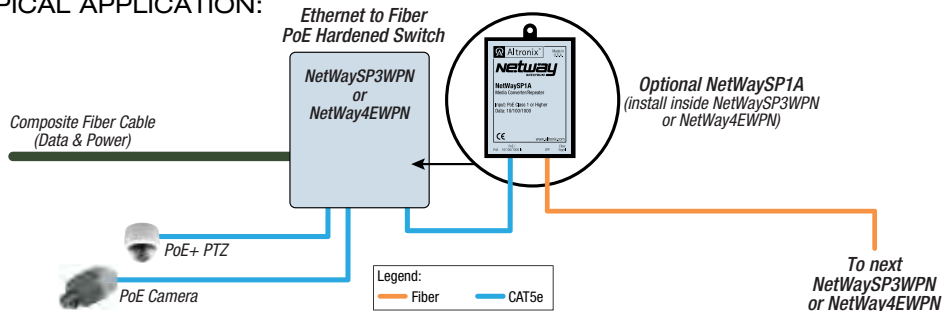



FIBER SOLUTIONS

*Ethernet to Fiber Media Converter/Injectors***NetWaySP1P**

- Converts Ethernet (10/100/1000Mbps) to Fiber
- One (1) Gigabit SFP port and one (1) Ethernet port rated at 30W max.
- 24VDC to 56VDC power input.

**NetWaySP2P**


- Converts Ethernet (10/100/1000Mbps) to Fiber
- One (1) Gigabit SFP port and two (2) Ethernet ports rated at 30W max per port.
- 48VDC to 56VDC power input.

**Features:**

- UL Listed in the U.S. and Canada (NetWaySP1P only), CE Approved.
- One (1) 10/100/1000 Mbps.
- Converts Ethernet to Fiber and provides PoE+.
- PoE power LED and Link connection indicators.



106

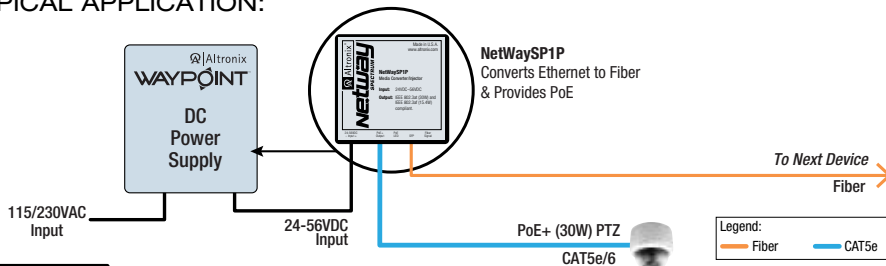TYPICAL APPLICATION:

Netway[®] FIBER SOLUTIONS

SPECTRUM

Ethernet over Fiber Hardened PoE+ Switch

Features:

- UL Listed in the U.S. and Canada for Information Technology Equipment, CE Approved.
- One (1) Gigabit SFP port (uplink).
- Two (2) ports up to 60W and 1 port up to 30W (10/100/1000 each).
- Supports PoE (802.3af), PoE+ (802.3at) and Hi-PoE devices.
- Input: 48-56VDC.
- Control, monitor and report power/diagnostics from anywhere over the network.

NETWAYSP3B



Embedded
LIQ
TECHNOLOGY

Units with Power Supply/Charger:

- 115VAC/230VAC input.
- 120W max output.
- Built-in battery charger.
- Integral surge protection.



107

NetWay Spectrum Model #	Configuration	Dimensions
NetWaySP3B	3-port switch board only	5.6"L x 4.5"W x 0.625"H
NetWaySP3PL	3-port PoE+ Hardened Switch on Backplane	10.75"H x 8.875"W x 2.375"D
NetWaySP3WPN	Outdoor 3-port Hardened Switch only in NEMA4/4X, IP66-11 enclosure	13.31"H x 11.31"W x 5.59"D
NetWaySP3WP	Outdoor 3-port PoE+ Hardened Switch in NEMA4/4X, IP66-11 enclosure	13.31"H x 11.31"W x 5.59"D
NetWaySP3WPX	Outdoor 3-port PoE+ Hardened Switch in larger NEMA4/4X, IP66-11 enclosure, which accommodates four (4) 12VDC/4AH batteries (48V of backup).	17.53"H x 15.3"W x 6.67"D
NetWaySP3X	Indoor 3-port PoE+ Hardened Switch	13.5"H x 13"W x 3.25"D

Netway[®] FIBER SOLUTIONS

SPECTRUM

Managed PoE+ Switches with Fiber Port

Features:

- UL Listed in the U.S. and Canada for Information Technology Equipment, CE Approved.
- One (1) Gigabit SFP port (uplink).
- Four (4) PoE/PoE+ (up to 30W) ports or two (2) Hi-PoE (60W) ports.
- Supports PoE (802.3af), PoE+ (802.3at) and Hi-PoE devices.
- Input: 48-56VDC.
- Provides local and/or remote access to critical information via LAN/WAN.
- Control, monitor and report power/diagnostics from anywhere over the network.

Units with Power Supply/Charger:

- 115VAC/230VAC input.
- 120W max output.
- Built-in battery charger.
- Integral surge protection.



Embedded
LIQ
TECHNOLOGY




NetWay4EWP

108


Model #	Configuration	Dimensions
NetWay4EB	4-port switch board only	5.6"L x 4.5"W x 0.625"H
NetWay4EPL	4-port PoE+ Hardened Switch on Backplane	10.75"H x 8.875"W x 2.375"D
NetWay4EWP	Outdoor 4-port Hardened Switch only in NEMA4/4X, IP66-11 enclosure	13.31"H x 11.31"W x 5.59"D
NetWay4EWP	Outdoor 4-port PoE+ Hardened Switch in NEMA4/4X, IP66-11 enclosure	13.31"H x 11.31"W x 5.59"D
NetWay4EWPX	Outdoor 4-port PoE+ Hardened Switch in larger NEMA4/4X, IP66-11 enclosure, which accommodates four (4) 12VDC/4AH batteries (48V of backup).	17.53"H x 15.3"W x 6.67"D
NetWay4EX	Indoor 4-port PoE+ Hardened Switch	13.5"H x 13"W x 3.25"D

Netway SPECTRUM FIBER SOLUTIONS

NetWaySP4WPN Dual SFP Application

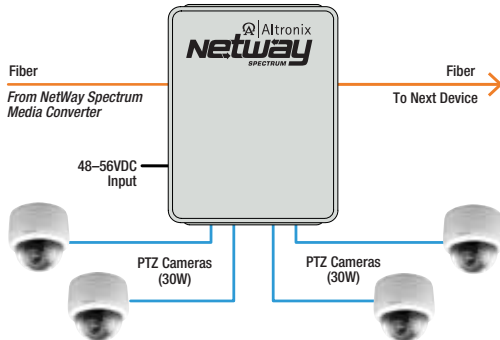

NetWaySP3WPN Single SFP / Hi-PoE Application

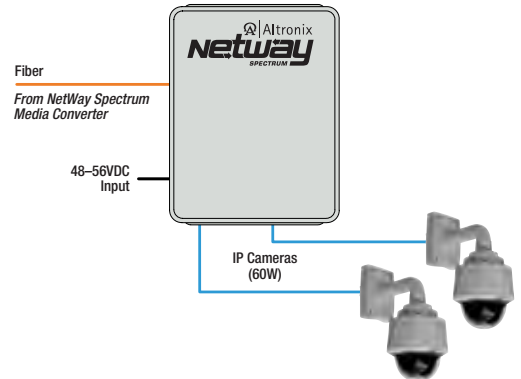

Netway® FIBER SOLUTIONS

SPECTRUM

4-Port Managed PoE+ Hardened Switches with Dual SFP (Fiber) Ports

Features:

- UL Listed in the U.S. and Canada for Information Technology Equipment, CE Approved.
- Two (2) Gigabit SFP ports (uplink).
- Four (4) ports up to 30W or two (2) ports up to 60W (10/100/1000 each).
- Supports PoE (802.3af), PoE+ (802.3at) and Hi-PoE devices.
- Input: 48-56VDC.
- Units can be deployed with single or multi-mode fiber or composite cable which combines fiber with copper to simultaneously deliver power and data.
- Control, monitor and report power/diagnostics from anywhere over the network.

Units with Power Supply/Charger:

- 115VAC/230VAC input.
- 115W max output.
- Built-in battery charger.
- Integral surge protection.



110

Model #	Configuration	Dimensions
NetWaySP4B	4-port switch board only	5.6"L x 4.5"W x 0.625"H
NetWaySP4PL	4-port PoE+ Hardened Switch on Backplane	10.75"H x 8.875"W x 2.375"D
NetWaySP4WPN	Outdoor 4-port Hardened Switch only in NEMA4/4X, IP66-11 enclosure	13.31"H x 11.31"W x 5.59"D
NetWaySP4WP	Outdoor 4-port PoE+ Hardened Switch in NEMA4/4X, IP66-11 enclosure	13.31"H x 11.31"W x 5.59"D
NetWaySP4WPX	Outdoor 4-port PoE+ Hardened Switch in larger NEMA4/4X, IP66-11 enclosure, which accommodates four (4) 12VDC/4AH batteries (48V of backup).	17.53"H x 15.3"W x 6.67"D
NetWaySP4X	Indoor 4-port PoE+ Hardened Switch	13.5"H x 13"W x 3.25"D

Netway[®] FIBER SOLUTIONS

SPECTRUM

8-Port Managed PoE+ Hardened Switches with Dual SFP (Fiber) Ports

Features:

- UL Listed in the U.S. and Canada for Information Technology Equipment, CE Approved.
- Two (2) Gigabit SFP ports (uplink).
- Eight (8) ports up to 30W. Two (2) ports can be up to 60W (two (2) 10/100/1000 ports and six (6) 10/100 ports).
- Supports PoE (802.3af), PoE+ (802.3at) and Hi-PoE devices.
- Input: 48-56VDC.
- Units can be deployed with single or multi-mode fiber or composite cable which combines fiber with copper to simultaneously deliver power and data.
- Control, monitor and report power/diagnostics from anywhere over the network.

Units with Power Supply/Charger:

- 115VAC/230VAC input.
- 115W max output.
- Built-in battery charger.
- Integral surge protection.



NetWaySP8B



Model #	Configuration	Dimensions
NetWaySP8B	8-port switch board only	5.6"L x 4.5"W x 0.625"H
NetWaySP8PL	8-port PoE+ Hardened Switch on Backplane	10.75"H x 8.875"W x 2.375"D
NetWaySP8WPN	Outdoor 8-port Hardened Switch only in NEMA4/4X, IP66-11 enclosure	13.31"H x 11.31"W x 5.59"D
NetWaySP8WP	Outdoor 8-port PoE+ Hardened Switch in NEMA4/4X, IP66-11 enclosure	13.31"H x 11.31"W x 5.59"D
NetWaySP8WPX	Outdoor 8-port PoE+ Hardened Switch in larger NEMA4/4X, IP66-11 enclosure, which accommodates four (4) 12VDC/4AH batteries (48V of backup).	17.53"H x 15.3"W x 6.67"D
NetWaySP8X	Indoor 8-port PoE+ Hardened Switch	13.5"H x 13"W x 3.25"D

Netway® PoE SOLUTIONS

Eight (8) Port Endspan

NetWay8E

- Supports up to eight (8) PoE/PoE+ cameras/devices.
- 10/100/1000 Ethernet ports.
- Two (2) Gigabit Uplinks.
- 30W full power per port (240W of total power).



NETWAY8E

Features:

- UL Listed in the U.S. and Canada for Information Technology Equipment, CE Approved.
- Supports PoE (802.3af) and PoE+ (802.3at) devices up to 100m over CAT5e/6
- Provides local and/or remote access to critical information via LAN/WAN.
- 115VAC/230VAC input.


- Control, monitor and report power/diagnostics from anywhere over the network.
- Built-in battery charging
(Optional rack mount battery enclosure available - model RE2)
- Compact 1U EIA 19" rack mount chassis
- Units can be rack, shelf or wall mounted.

Embedded
LINQ
TECHNOLOGY



112

TYPICAL APPLICATIONS:

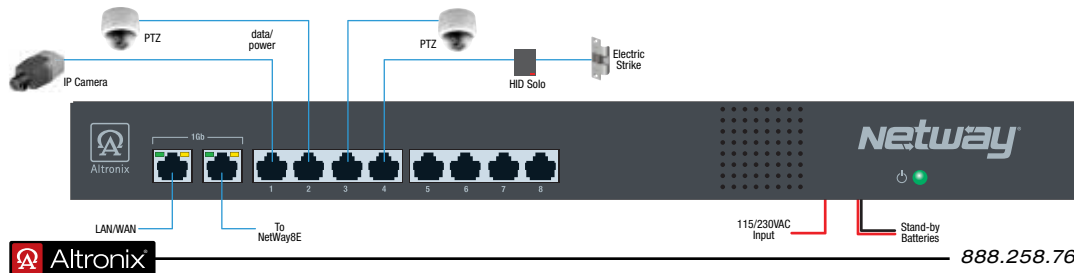

Netway® PoE SOLUTIONS

Eight (8) Port Managed Midspan

NetWay8G

- Supports up to eight (8) PoE/PoE+ cameras/devices.
- 10/100/1000 Ethernet ports
- Provides 30W full power per port (240W of total power)



Features:

- UL Listed in the U.S. and Canada for Information Technology Equipment, CE Approved.
- Provides the precise power your PoE devices need.
- Supports PoE (802.3af) and PoE+ (802.3at) devices up to 100m over CAT5e/6.
- 115VAC/230VAC input.

- Control, monitor and report power/diagnostics from anywhere over the network.
- Built-in battery charging (Optional rack mount battery enclosure available - model RE2)
- Port status LED indicators.
- Compact 1U EIA 19" rack mount chassis.
- Units can be rack, shelf or wall mounted.



Netway[®] PoE SOLUTIONS

Eight (8) Port Managed Midspan

NetWay8M

- Supports up to eight (8) PoE/PoE+ cameras/devices.
- Provides up to 30W per port not to exceed 150W max.

Sixteen (16) Port Managed Midspan

NetWay16M

- Supports up to sixteen (16) PoE/PoE+ cameras/devices.
- Provides up to 30W per port not to exceed 300W max.

Features:

- UL Listed in the U.S. and Canada for Access Control and Information Technology Equipment, CE Approved, C-Tick Approved.
- Provides the precise power your PoE devices need.
- Plug-and-play yet easily customizable.
- IEEE 802.3af (PoE) and IEEE 802.3at (PoE +) compliant.
- Programmable port priority.
- PoE shutdown feature is selectable by port - allows for cameras and/or edge devices to be reset.
- Control, monitor and report power/diagnostics from anywhere over the network.

- Unused ports can be disabled to prevent unauthorized network connections.
- Safe & cost effective power distribution over CAT-5/5E/6 LAN infrastructure.
- Supports non-PoE 12VDC IP cameras (utilizing NetWay1512 or NetWay3012 adapters).
- Port status LED indicators.
- Compact 1U EIA 19" rack mount chassis.
- Units can be rack, shelf or wall mounted.

Embedded
LIQ
TECHNOLOGY



NETWAY16M

Netway® PoE SOLUTIONS

Eight (8) Port Midspan

NetWay8

- Supports up to eight (8) PoE/PoE+ cameras/devices.
- Provides up to 30W per port not to exceed 150W max.

Sixteen (16) Port Midspan

NetWay16

- Supports up to sixteen (16) PoE/PoE+ cameras/devices.
- Provides up to 30W per port not to exceed 300W max.

Features:

- UL Listed in the U.S. and Canada for Access Control and Information Technology Equipment, CE Approved, C-Tick Approved.
- Provides the precise power your PoE devices need.
- IEEE 802.3af (PoE) and IEEE 802.3at (PoE+) compliant.
- Safe & cost effective power distribution over CAT-5/5E/6 LAN infrastructure.
- Supports non-PoE 12VDC IP cameras (utilizing NetWay1512 or NetWay3012 adapters).
- Port status LED indicators.
- Compact 1U EIA 19" rack mount chassis can be rack, shelf or wall mounted.



NETWAY8



115

Netway[®] PoE SOLUTIONS

Single Port Injectors

NetWay1

- UL Listed in the U.S. and Canada for Access Control and Information Technology Equipment, CE Approved.
- Supports IEEE 802.3af (PoE) devices.
- 24VAC/VDC input.

NetWay1X

- NetWay1 with IEEE 802.3af (PoE) and IEEE 802.3at (PoE+) compatibility.



NetWay1P

- NetWay1 (15W) with TP2440 Plug-in Transformer.

NetWay112

- NetWay1 with 12VDC input.



NETWAY1X

Features:

- Provides power and passes data over CAT5e cable up to 100m.
- PoE shutdown feature - allows for device reset.
- Safe & cost effective power distribution over CAT-5/5E/6 LAN infrastructure.
- Supports non-PoE 12VDC IP cameras (utilizing NetWay1512 or NetWay3012 adapters).
- Port status LED indicators.
- Compact insulated housing with screw mounting.

116

Outdoor Single Port High PoE Injector

NetWay1DWP

- UL Listed in the U.S. and Canada, CE Approved.
- Single port provides up to 60W of power and passes data over ethernet (CAT5e) cable up to 100m (328 ft).
- 115VAC/230VAC input.

Features:

- Maximum power: High PoE (60W).
- Integral surge protection.
- Integral flanges and lightweight design simplify mounting.
- IP66, NEMA4/4X Rated outdoor enclosure with lockable latches.



NETWAY1DWP

Netway PoE SOLUTIONS

Repeater Modules

NetWayXT

- Supports IEEE 802.3af (PoE) devices.


NetWayXTX

- Supports IEEE 802.3af (PoE) and IEEE 802.3at (PoE+) devices.



NETWAYXT

TYPICAL APPLICATION:



Features:

- UL Listed in the U.S. and Canada for Information Technology Equipment, CE Approved.
- Interfaces with NetWay midspans or PoE switches to extend data (video) an additional 100m (328 ft.).
- Multiple units may be used on a single port to extend range (quantity based on device current draw).
- Port status LED indicators.
- Plug-and-play installation, no external power required.



Adapters

NetWay1512

- UL Listed in the U.S. and Canada for Information Technology Equipment, CE Approved.
- 15W midspan adapter for non-PoE compliant IP cameras.

NetWay3012

- UL Listed in the U.S. and Canada for Information Technology Equipment, CE Approved.
- 30W midspan adapter for non-PoE compliant IP fixed or PTZ cameras.



NETWAY3012

Features:

- Supports non-PoE 12VDC IP cameras.
- LED indicators.
- Compact insulated housing with screw mounting.



Netway® PoE SOLUTIONS

Single Port Hi-PoE Injectors

NetWay1D

- UL Listed in the U.S. and Canada, CE Approved
- Supports IEEE 802.3af (PoE), IEEE 802.3at (PoE+) and Hi-PoE.
- Port provides up to 60W.
- Aux. Class 2 power-limited output rated @ 56VDC/60W.
- 115VAC/230VAC Input.



NetWay1E

- UL Listed in the U.S. and Canada, CE Approved
- Supports IEEE 802.3af (PoE) and IEEE 802.3at (PoE+).
- Also supports LTPoE++™ 70W, 52.7W & 38.7W PD compliant devices.
- PoE shutdown feature.
- 115VAC Input.

NetWay1EV

- NetWay1E with 220VAC Input.

118

NETWAY1D

Features:

- Provides precise power and passes data over Ethernet (CAT-5) cable up to 100m (328 ft).
- Safe and cost effective power distribution over CAT-5/5E/6 LAN infrastructure.

- Data rate 10/100/1000.
- Integral surge protection.
- Power LED indicator.
- IEC 320 - 3-wire grounded line cord (detachable).
- Units can be wall or shelf mounted.



Netway[®] PoE SOLUTIONS

*Enables Four (4) IP Devices
over a Single Cable*

NetWay4ESK (kit)

- UL Listed in the U.S. & Canada, CE & C-Tick Approved.
- Managed PoE/PoE+ Switch with Midspan Injector.
- Includes NetWay4ES and NetWay1D.



NetWay4ESK


Features:

- Provides a total of 60W max. up to four (4) devices.
- Built in IP management, allowing for remote camera reset, monitoring and reporting via various IP protocols.
- Safe and cost effective power distribution over CAT-5/5E/6 LAN infrastructure.



119

TYPICAL APPLICATION:

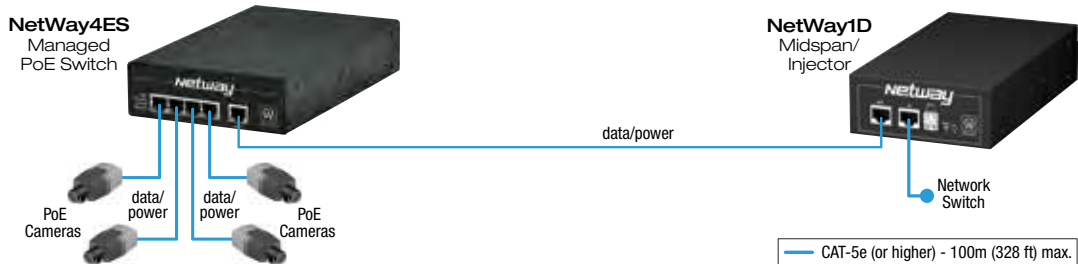



PASSIVE UTP TRANSCEIVER HUBS WITH INTEGRAL CAMERA POWER

Eight (8) Channel

HubWay8CD

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- Eight (8) channels of combined video, data and power.
- 5 amp total output current.
- 115VAC input.



HubWay8D

- UL Listed in the U.S. for CCTV.
- All features of HubWay8CD.
- 115/230VAC selectable input.



Eight (8) Channel (Isolated Power)

HubWay8Di

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- Eight (8) channels of combined video, data and power.
- 8 amp total output current.
- Electronically isolated power outputs.
- 115VAC or 230VAC selectable input.



Refer to page 129 for video balun/combiners.

Above models available with video balun/combiners visit altronix.com for more info.

Features:

- Quality video up to 750 ft.
- Individually selectable 24VAC or 28VAC power outputs with OFF position.
- PTC protected power outputs.
- Surge suppression
- Power LED indicators.
- Eight (8) 75 ohm video outputs.
- RS422/RS485 data inputs.
- Illuminated master power switch.
- IEC 320 - 3-wire grounded line cord (detachable).
- Compact 1U EIA 19" rack mount chassis.
- Units can be rack, shelf or wall mounted.



HUBWAY8CD



PASSIVE UTP TRANSCEIVER HUBS WITH INTEGRAL CAMERA POWER

Sixteen (16) Channel

HubWay16CD

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- Sixteen (16) channels of combined video, data and power.
- 10 amp total output current.
- 115VAC input.



HubWay16D

- UL Listed in the U.S. for CCTV, CE Approved.
- All features of HubWay16CD.
- 115/230VAC selectable input.



Sixteen (16) Channel (Isolated Power)

HubWay16Di

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- Sixteen (16) channels of combined video, data and power.
- 16 amp total output current.
- Electronically isolated power outputs.
- 115VAC or 230VAC selectable input.



Refer to page 129 or video balun/combiners.

Above models available with video balun/combiners visit altronix.com for more info.

Features:

- Quality video up to 750 ft.
- Individually selectable 24VAC or 28VAC power outputs with OFF position.
- PTC protected power outputs.
- Surge suppression.
- Power LED indicators.
- Sixteen (16) 75 ohm video outputs.
- RS422/RS485 data inputs.
- Illuminated master power switch.
- IEC 320 - 3-wire grounded line cord (detachable).
- Compact 1U EIA 19" rack mount chassis.
- Units can be rack, shelf or wall mounted.



HUBWAY16CD

HubWay ACTIVE UTP TRANSCEIVER HUBS

Sixteen (16) Channel with Integral Power

HubWayEX16SP

- UL Listed in the U.S. and Canada for CCTV.
- Sixteen (16) channels of combined video, data and power.
- Individually selectable 24VAC or 28VAC power outputs with OFF position.
- Electronically isolated PTC protected power outputs.
- 16 amp total output current.
- Surge suppression.
- Power and video LED indicators.

122

Sixteen (16) Channel Hub

HubWayEX16S

- UL Listed in the U.S. and Canada for CCTV.
- Sixteen (16) channels of combined video and data.
- Video LED indicators.

Refer to page 129 for video balun/combiners.

Features:

- Quality video up to 5000 ft.
- Automatic picture and gain control.
- Automatic correction for reverse video polarity.
- Sixteen (16) 75 ohm video outputs.
- RS422/RS485 data inputs.
- 115VAC or 230VAC selectable input.
- Illuminated master power switch.
- IEC 320 - 3-wire grounded line cord (detachable).
- Compact 1U EIA 19" rack mount chassis.
- Units can be rack, shelf or wall mounted.



HUBWAYEX16SP





ACTIVE UTP TRANSCEIVER MODULE

Single Channel

HubWayEX1


- UL Listed in the U.S. and Canada for CCTV.
- One (1) channel of combined video and data.
- Quality video up to 5000 ft.

Features:

- 16VAC-24VAC or 12VDC-24VDC.
- Automatic picture and gain control.
- Automatic correction for reverse video polarity.
- Video LED indicator.
- RS422/RS485 data input.
- One (1) 75 ohm video output.
- Screw mounting.



TYPICAL APPLICATION:

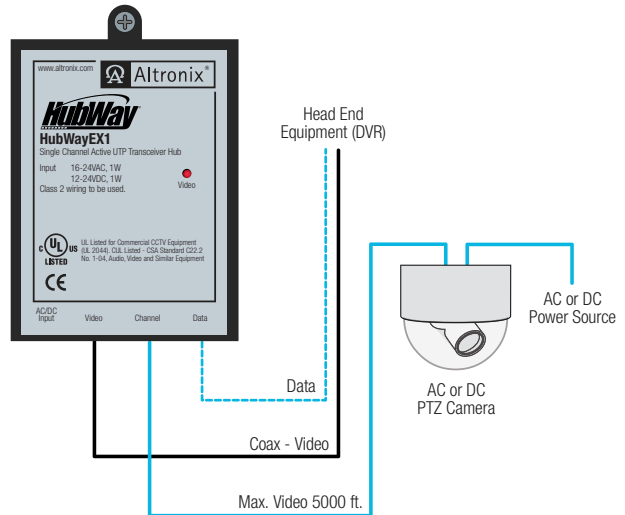

123



ACTIVE UTP TRANSCEIVER HUBS

*Sixteen (16) Channel Hub***HubWayEX16**

- UL Listed in the U.S. and Canada for CCTV.
- Sixteen (16) channels of video distributed over four (4) structured cables.
- Sixteen (16) 75 ohm video outputs.

*Thirty-two (32) Channel Hub***HubWayEX32**

- UL Listed in the U.S. and Canada for CCTV.
- Thirty-two (32) channels of video distributed over eight (8) structured cables.
- Thirty-two (32) 75 ohm video outputs.

Refer to page 129 for video balun/combiners.

Features:

- Quality video up to 5000 ft.
- Automatic picture and gain control.
- Automatic correction for reverse video polarity.
- Video LED indicators.
- RS422/RS485 data inputs.
- Illuminated master power switch.
- IEC 320 - 3-wire grounded line cord (detachable).
- Compact 1U EIA 19" rack mount chassis.
- Units can be rack, shelf or wall mounted.



HubWay[®] UTP POWER INJECTOR

HubWayEXP

- UL Listed in the U.S. and Canada for CCTV.
- Sixteen (16) channel isolated camera power injector.
- Passes sixteen (16) video signals over four (4) structured cables back to the transceiver hub (MDF), while providing the necessary camera power locally (IDF), ensuring seamless plug and play operation.
- Individually selectable 24VAC or 28VAC power outputs with OFF position.
- PTC protected power outputs.
- 16 amp total output current (1 amp per channel).


Refer to page 129 for video balun/combiners.

Features:

- Surge suppression.
- Power LED indicators.
- RS422/RS485 data inputs.
- 115VAC or 230VAC selectable input.
- Illuminated master power switch.
- IEC 320 - 3-wire grounded line cord (detachable).
- Compact 1U EIA 19" rack mount chassis.
- Units can be rack, shelf or wall mounted.



125

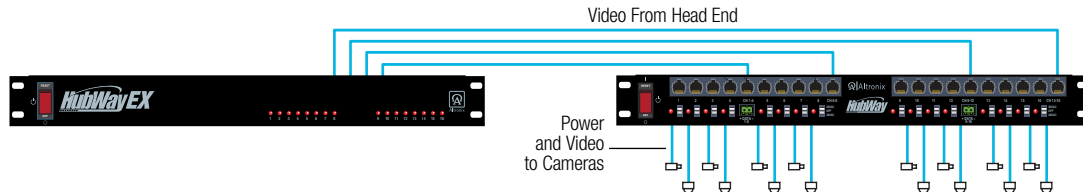



ACTIVE UTP TRANSCEIVER HUB WITH INTEGRAL ISOLATED CAMERA POWER

Sixteen (16) Channel

HubWayLD16Di

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- Sixteen (16) channels of combined video, data and power.
- 16 amp total output current.
- Electronically isolated power outputs.
- 115VAC or 230VAC selectable input.

126

Refer to page 129 for video balun/combiners.

Features:

- Quality video up to 3000 ft.
- Individually selectable 24VAC or 28VAC power outputs with OFF position.
- PTC protected power outputs.
- Surge suppression.
- Picture and gain controls.
- Video and power LED indicators.
- Sixteen (16) 75 ohm video outputs.
- RS422/RS485 data inputs.
- Illuminated master power switch.
- IEC 320 - 3-wire grounded line cord (detachable).
- Compact 1U EIA 19" rack mount chassis.
- Units can be rack, shelf or wall mounted.



Above models available with video balun/combiners visit altronix.com for more info.



ACTIVE UTP TRANSCEIVER HUBS

Eight (8) Channel

HubWayLDH8

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- Eight (8) channels of combined video and data.
- Eight (8) 75 ohm video outputs.

Sixteen (16) Channel

HubWayLDH16

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- Sixteen (16) channels of combined video and data.
- Sixteen (16) 75 ohm video outputs.

*Refer to page 129 for
video balun/combiners.*

Features:

- Quality video up to 3000 ft.
- Picture and gain controls.
- Video LED indicators.
- RS422/RS485 data inputs.
- 115VAC or 230VAC selectable input.
- Illuminated master power switch.
- IEC 320 - 3-wire grounded line cord (detachable).
- Compact 1U EIA 19" rack mount chassis.
- Units can be rack, wall or shelf mounted.



127



PASSIVE UTP TRANSCEIVER HUBS WITH INTEGRAL CAMERA POWER

Four (4) Channel

HubSat4D

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- Four (4) channels of combined video, data and power.
- 4 amp total output current.
- Four (4) 75 ohm video outputs.

Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

HubSat4WP

- HubSat4D with NEMA 4/IP 65 Rated enclosure for outdoor use.
- CE Approved

Enclosure dimensions: 12"H x 8"W x 6"D

Features:

- Passes video signals over structured cable back to the transceiver hub (MDF), while providing the necessary camera power locally (IDF), ensuring seamless plug and play operation.
- Quality video up to 750 ft.
- Individually selectable 24VAC or 28VAC power outputs with OFF position.
- PTC protected power outputs.
- Power LED indicators.
- RS422/RS485 data inputs.
- 115VAC input.



Eight (8) Channel

HubSat8D

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- Eight (8) channels of combined video, data and power.
- 8 amp total output current.
- Eight (8) 75 ohm video outputs.
- Includes cam lock.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

*Refer to page 129 for
video balun/combiners.*



HUBSAT4D

Above models available with isolated power outputs and/or video balun/combiners visit altronix.com for more info.



VIDEO BALUN/COMBINERS

Slim-Line Video Balun/Combiners

HubWayAv2

- Interfaces with HubWay and HubSat UTP Transceiver Hubs for 24VAC/12VDC fixed or PTZ cameras (based on power supply selection).
- Pass through video/data/power.
- Data/PTZ RS422/RS485 output.

Features:

- 1 amp supply current (based on power supply rating).
- Low profile fits inside dome cameras and back boxes.
- 75 ohm video input.
- 30cm leads.

HubWayAv2Pk

- 8 pack of HubWayAv2 video balun/combiners.



HUBWAYAV2

129

DC Video Balun/Combiners

HubWayDv

- Interfaces with HubWay and HubSat UTP Transceiver Hubs for 12VDC fixed or PTZ cameras.

HubWayDvPk

- 8 pack of HubWayDv video balun/combiners.

HubWayDvi

- Video balun/combiner provides isolation for 12VDC cameras.

HubWayDviPk

- 8 pack of HubWayDvi video balun/combiners.

Features:

- UL Listed Accessory.



HUBWAYDV

- Power LED indicator.

AC POWER SUPPLIES

*Four (4) Output***ALTV244UL**

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 3.5 amp @ 24VAC or 3 amp @ 28VAC max. power.
- Four (4) fuse protected non power-limited outputs.
- Power ON/OFF switch.

Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

ALTV244ULCB

- ALTV244UL with Four (4) Class 2 Rated PTC protected power-limited outputs.

ALTV244175UL

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 7 amp @ 24VAC or 6.25 amp @ 28VAC max. power.
- Four (4) fuse protected non power-limited outputs.
- Illuminated master power switch.

Enclosure dimensions: 12.25"H x 7.75"W x 4.5"D

ALTV244175ULCB

- ALTV244175UL with Four (4) Class 2 Rated PTC protected power-limited outputs.

130

Features:

- 115VAC 60Hz. input.
- AC power LED indicators.
- Spare fuses provided (all models with primary and/or secondary fuses).

* Optional factory installed 3-wire line cord (add suffix "3" to model number).



ALTV244UL

AC POWER SUPPLIES

Eight (8) Output

ALTV248UL

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 3.5 amp @ 24VAC or 3 amp @ 28VAC max. power.
- Eight (8) fuse protected non power-limited outputs.
- Power ON/OFF switch.

Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

ALTV248ULCB

- ALTV248UL with Eight (8) Class 2 Rated PTC protected power-limited outputs.

ALTV248175UL

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 7 amp @ 24VAC or 6.25 amp @ 28VAC max. power.
- Eight (8) fuse protected non power-limited outputs.
- Illuminated master power switch.

Enclosure dimensions:
12.25"H x 7.75"W x 4.5"D

ALTV248175ULCB

- ALTV248175UL with Eight (8) Class 2 Rated PTC protected power-limited outputs.

ALTV248300UL

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 12.5 amp @ 24VAC or 10 amp @ 28VAC max. power.
- Eight (8) fuse protected non power-limited outputs.
- Illuminated master power switch.

Enclosure dimensions:
12.25"H x 7.75"W x 4.5"D

ALTV248300ULCB

- ALTV248300UL with Eight (8) Class 2 Rated PTC protected power-limited outputs.

Features:

- 115VAC 60Hz. input.
- AC power LED indicators.
- Spare fuses provided (all models with primary and/or secondary fuses).

* Optional factory installed 3-wire line cord (add suffix "3" to model number).



ALTV248UL

AC POWER SUPPLIES

*Eight (8) Output***ALTV248300ULM**

- Compact version of AL248300UL.
- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 12.5 amp @ 24VAC or 10 amp @ 28VAC max. power.
- Eight (8) fuse protected non power-limited outputs.

Enclosure dimensions: 8.5"H x 7.5"W x 3.75"D

ALTV248300ULCBM

- ALTV248300ULM with Eight (8) Class 2 Rated PTC protected power-limited outputs.

ALTV248600UL

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 25 amp @ 24VAC or 20 amp @ 28VAC max. power.
- Eight (8) fuse protected non power-limited outputs.
- Includes cam lock.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

ALTV248600ULCB

- ALTV248600UL with Eight (8) Class 2 Rated PTC protected power-limited outputs.

132

Features:

- 115VAC 60Hz. input.
- Illuminated master power switch.
- AC power LED indicators.
- Spare fuses provided (all models with primary and/or secondary fuses).
- Includes cam lock.

* Optional factory installed 3-wire line cord
(add suffix "3" to model number).



ALTV248600UL

AC POWER SUPPLIES

ALTV2416ULX

- 7 amp @ 24VAC or 6 amp @ 28VAC max. power.
- Sixteen (16) fuse protected non power-limited outputs.
- Power ON/OFF switch.

Enclosure dimensions:

13.5"H x 13"W x 3.25"D

ALTV2416ULCBX

- ALTV2416ULX with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.

ALTV2416300UL

- 12.5 amp @ 24VAC or 10 amp @ 28VAC max. power.
- Sixteen (16) fuse protected non power-limited outputs.
- Illuminated master power switch.

Enclosure dimensions:

13.5"H x 13"W x 3.25"D

ALTV2416300ULCB

- ALTV2416300UL with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.

Sixteen (16) Output

ALTV2416300ULM

- Compact version of ALTV2416300UL.
- 12.5 amp @ 24VAC or 10 amp @ 28VAC max. power.
- Sixteen (16) fuse protected non power-limited outputs.
- Illuminated master power switch.

Enclosure dimensions:

8.5"H x 7.5"W x 3.75"D

ALTV2416300ULCBM

- ALTV2416300ULM with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.

ALTV2416600UL

- 25 amp @ 24VAC or 20 amp @ 28VAC max. power.
- Sixteen (16) fuse protected non power-limited outputs.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

ALTV2416600ULCB

- ALTV2416600UL with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.

Features:

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 115VAC 60Hz. input.
- AC power LED indicators.
- Spare fuses provided (all models with primary and/or secondary fuses).
- Includes cam lock.



* Optional factory installed 3-wire line cord (add suffix "3" to model number).



ALTV2416300ULCBM

AC POWER SUPPLIES

*Thirty-two (32) Output***ALTV2432300UL**

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 12.5 amp @ 24VAC or 10 amp @ 28VAC max. power.
- Thirty-two (32) fuse protected outputs.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

ALTV2432300ULCB

- ALTV2432300UL with Thirty-two (32) Class 2 Rated PTC protected power-limited outputs.

ALTV2432600UL

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 25 amp @ 24VAC or 20 amp @ 28VAC max. power.
- Thirty-two (32) fuse protected outputs.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

ALTV2432600ULCB

- ALTV2432600UL with Thirty-two (32) Class 2 Rated PTC protected power-limited outputs.

134

Features:

- 115VAC 60Hz. input.
- Illuminated master power switch.
- AC power LED indicators.
- Spare fuses provided (all models with primary and/or secondary fuses).
- Includes cam lock.

* Optional factory installed 3-wire line cord
(add suffix "3" to model number).



ALTV2432600UL

ISOLATED AC POWER SUPPLIES

Eight (8) Output

ALTV248ULHi

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 12.5 amp @ 24VAC max. power.
- Eight (8) 1.56 amp fuse protected isolated outputs.

Enclosure dimensions:

13.5"H x 13"W x 3.25"D

ALTV248ULCBHi

- ALTV248ULHi with Eight (8) Class 2 Rated PTC protected power-limited isolated outputs.

ALTV248ULMi

- Compact version of ALTV248ULHi.
- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 12.5 amp @ 24VAC max. power.
- Eight (8) 1.56 amp fuse protected isolated outputs.

Enclosure dimensions:

8.5"H x 7.5"W x 3.75"D

ALTV248ULCBMi

- ALTV248ULMi with Eight (8) Class 2 Rated PTC protected power-limited isolated outputs.

Sixteen (16) Output

ALTV2416ULi

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 25 amp @ 24VAC max. power.
- Sixteen (16) 1.56 amp fuse protected isolated outputs.
- Includes cam lock.

Enclosure dimensions:

13.5"H x 13"W x 3.25"D

ALTV2416ULCBi

- ALTV2416ULi with Sixteen (16) Class 2 Rated PTC protected power-limited isolated outputs.

135

Features:

- 115VAC 60Hz. input.
- Illuminated master power switch.
- Spare fuses provided (all models with primary and/or secondary fuses).

* Optional factory installed 3-wire line cord (add suffix "3" to model number).



ALTV248ULHi

COMBINATION AC/DC POWER SUPPLIES

*Four (4) Output***ALTV1224C4**

- 12VDC and 24VAC output.
- 2 amp @ 12VDC and 4 amp @ 24VAC max. power.
- 6 amp total supply current.
- Four (4) individually fuse protected outputs:
 - Two (2) outputs @ 12VDC.
 - Two (2) outputs @ 24VAC.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

*Sixteen (16) Output***ALTV1224C**

- CE Approved.
- 12VDC and 24VAC output.
- 3.5 amp @ 12VDC and 3.5 amp @ 24VAC max. power.
- 7 amp total supply current.
- Sixteen (16) individually fuse protected outputs:
 - Eight (8) outputs @ 12VDC.
 - Eight (8) outputs @ 24VAC.

Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D



136

Features:

- 115VAC 50/60Hz. input (220VAC versions available).
- Power ON/OFF switch.
- DC outputs are filtered and electronically regulated.
- AC and DC power LED indicators.
- Spare fuses provided (all models with primary and/or secondary fuses).
- Includes cam lock.



ALTV1224C

DC POWER SUPPLIES

Four (4) Output

ALTV615DC4UL

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 24VAC/50VA input
 - Operates from separate plug-in transformer (order model # TP2450).
- 2.5 amp @ 6VDC-12VDC or 2 amp @ 12VDC-15VDC max. power.
- Four (4) Class 2 Rated fuse protected power-limited outputs.
- Power ON/OFF switch.

Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

Eight (8) Output

ALTV615DC8UL

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 4 amp @ 6VDC-15VDC max. power.
- Eight (8) Class 2 Rated fuse protected power-limited outputs.
- Includes cam lock.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

ALTV615DC8ULCB

- ALTV615DC8UL with Eight (8) Class 2 Rated PTC protected power-limited outputs.

Features:

- 115VAC 60Hz input (220VAC versions available, not UL/CUL Listed).
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- AC and DC power LED indicators.
- Spare fuses provided (all models with primary and/or secondary fuses).



ALTV615DC4UL

DC POWER SUPPLIES

*Sixteen (16) Output***ALTV615DC416UL**

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 4 amp @ 6VDC-15VDC max. power.
- Sixteen (16) Class 2 Rated fuse protected power-limited outputs.
- Includes cam lock.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

ALTV615DC416ULCB

- ALTV615DC416UL with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.

ALTV615DC616UL

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 6 amp @ 6VDC-15VDC max. power.
- Sixteen (16) fuse protected non power-limited outputs.
- Includes cam lock.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

ALTV615DC616ULCB

- ALTV615DC616UL with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.

138

Features:

- 115VAC 60Hz. input.
- 6VDC-15VDC selectable outputs.
- Illuminated master power switch.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- AC and DC power LED indicators.
- Spare fuses provided (all models with primary and/or secondary fuses).

* Optional factory installed 3-wire line cord (add suffix "3" to model number).



ALTV615DC616UL

SAV™ DC POWER SUPPLIES

Four (4) Output

SAV4D

- 5 amp @ 12VDC.
 - Four (4) PTC protected power-limited outputs.
- Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

Nine (9) Output

SAV9D

- 5 amp @ 12VDC.
 - Nine (9) PTC protected power-limited outputs.
- Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

Eighteen (18) Output

SAV18D

- 5 amp @ 12VDC.
 - Eighteen (18) PTC protected power-limited outputs.
- Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

SAV182D

- 11 amp @ 12VDC.
 - Eighteen (18) PTC protected power-limited outputs.
 - Includes cam lock.
- Enclosure dimensions: 13.5"H x 13"W x 3.25"D

SAV9D 139

Features:

- UL Listed in the U.S. and Canada for CCTV.
- 115VAC/230VAC input.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Individual power LED indicators.
- Field installable grounded line cord or can be hard wired.



DC POWER SUPPLIES

*Thirty-six (36) Output***SAV36D**

- 11 amp @ 12VDC.
- Thirty-six (36) PTC protected power-limited outputs.
- Includes cam lock.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

Features:

- UL Listed in the U.S. and Canada for CCTV.
- 115VAC/230VAC input.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Individual power LED indicators.
- Field installable grounded line cord or can be hard wired.



SAV36D

DC POWER SUPPLIES

*Sixteen (16) Output***ALTV615DC1016**

- 10 amp @ 6VDC-15VDC max. power.
- Sixteen (16) fuse protected outputs.

Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

ALTV615DC1016CB

- ALTV615DC1016 with Sixteen (16) PTC protected outputs.

Features:

- 115VAC 50/60Hz input (220VAC versions available).
- Illuminated master power switch.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Spare fuses provided (all models with primary and/or secondary fuses).
- AC and DC power LED indicators.
- Includes cam lock.

RESERV[®] VIDEO SURVEILLANCE UPS

ReServ1

- Sixteen (16) power outputs:
 - Twelve (12) true sine wave regulated 24VAC outputs @ 4 amp total supply current.
 - Four (4) regulated 12VDC outputs @ 2 amp total supply current.

ReServ1WP

- ReServ1 with NEMA4 / IP66 Rated outdoor enclosure.
- Enclosure dimensions: 17.53"H x 15.3"W x 6.67"D

Stand-by time (for all Reserv models):

Batteries	4 amp (100VA) max. Load at 24VAC and/or 12VDC
Two (2) 12VDC/7AH	45 minutes
Two (2) 12VDC/12AH	90 minutes

*Stand-by times are approximate.

Features:

- UL Listed in the U.S. and Canada for Information Technology Equipment.
- PTC protected power-limited outputs.
- Individual power LED indicators.
- Low voltage input and Shutdown LED indicators.
- AC fail and low battery supervision.



- Audible alarm provides notification of UPS trouble conditions.
- Built-in charger for sealed lead acid or gel type batteries.
- Enclosure accommodates two (2) 12VDC/7AH batteries (order separately).
- Includes cam lock and battery leads.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D



(order batteries separately)

RESERV[®] VIDEO SURVEILLANCE UPS

ReServ2

- Sixteen (16) true sine wave regulated 24VAC outputs @ 4 amp total supply current.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

ReServ2WP

- ReServ2 with NEMA4 / IP66 Rated outdoor enclosure.

Enclosure dimensions: 17.53"H x 15.3"W x 6.67"D

ReServ3

- Sixteen (16) regulated 12VDC outputs @ 8 amp total supply current.

Enclosure dimensions: 13.5"H x 13"W x 3.25"D

142 ReServ3WP

- ReServ3 with NEMA4 / IP66 Rated outdoor enclosure.

Enclosure dimensions: 17.53"H x 15.3"W x 6.67"D

Features:

- UL Listed in the U.S. and Canada for Information Technology Equipment.
- PTC protected power-limited outputs.
- Individual power LED indicators.
- Low voltage input and Shutdown LED indicators.
- AC fail and low battery supervision.
- Audible alarm provides notification of UPS trouble conditions.
- Built-in charger for sealed lead acid or gel type batteries.
- Enclosure accommodates two (2) 12VDC/7AH batteries (order separately).
- Includes cam lock and battery leads.



ReServ4WP

- Four (4) power outputs:
 - Two (2) true sine wave regulated 24VAC outputs @ 4 amp total supply current.
 - Two (2) regulated 12VDC outputs @ 1 amp total supply current.
- NEMA4 / IP66 Rated outdoor enclosure.

Enclosure dimensions: 17.53"H x 15.3"W x 6.67"D

** ReServ4WP is not UL Listed.*



Order Batteries Separately

OUTDOOR AC POWER SUPPLIES

Four (4) Output

WPTV244175UL

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 7 amp @ 24VAC or 6.25 amp @ 28VAC max. power.
- One (1) fuse protected non power-limited output rated @ 10 amp/250V (for high current devices such as heaters and pan tilt mechanisms).
- Three (3) Class 2 Rated PTC protected power-limited outputs rated @ 2.5 amp (for camera power).

Enclosure dimensions: 12"H x 8"W x 6"D

WPTV244300UL

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 12.5 amp @ 24VAC or 10 amp @ 28VAC max. power.
- One (1) fuse protected non power-limited output rated @ 15 amp/32V (for high current devices such as heaters and pan tilt mechanisms).
- Three (3) Class 2 Rated PTC protected power-limited outputs rated @ 2.5 amp (for camera power).

Enclosure dimensions: 12"H x 8"W x 6"D

Features:

- 115VAC 60Hz. input (220VAC versions available, not UL/CUL Listed).
- Illuminated master power switch.
- AC power LED indicator.
- Surge suppression.
- Spare fuses provided (all models with primary and/or secondary fuses).
- NEMA 4/IP 65 Rated enclosure for outdoor use.



WPTV244300UL

143

PMK1 - Pole Mount Kit available, see page 149

OUTDOOR AC POWER SUPPLIES

Eight (8) Output

WPTV248UL

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 3.5 amp @ 24VAC or 3 amp @ 28VAC max. power.
- Eight (8) fuse protected non power-limited outputs.

Enclosure dimensions: 12"H x 8"W x 6"D

WPTV248ULCB

- WPTV248UL with Eight (8) Class 2 Rated PTC protected power-limited outputs.

WPTV248175UL

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 7 amp @ 24VAC or 6.25 amp @ 28VAC max. power.
- Eight (8) fuse protected non power-limited outputs.

Enclosure dimensions: 12"H x 8"W x 6"D

WPTV248175ULCB

- WPTV248175UL with Eight (8) Class 2 Rated PTC protected power-limited outputs.

WPTV248300UL

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 12.5 amp @ 24VAC or 10 amp @ 28VAC max. power.
- Eight (8) fuse protected non power-limited outputs.

Enclosure dimensions: 12"H x 8"W x 6"D

WPTV248300ULCB

- WPTV248300UL with Eight (8) Class 2 Rated PTC protected power-limited outputs.

144

Features:

- 115VAC 60Hz input (220VAC versions available, not UL/CUL Listed).
- Illuminated master power switch.
- AC power LED indicator.
- Surge suppression.
- Spare fuses provided (all models with primary and/or secondary fuses).
- NEMA 4/IP 65 Rated enclosure for outdoor use.



WPTV248175UL

PMK1 - Pole Mount Kit available, see page 149



VERSATILE OUTDOOR POWER SOLUTIONS

WAYPOINT™

Multi-output power for
harsh environments

WAYPOINT™ OUTDOOR AC POWER SOLUTIONS

WayPoint10A

- Output Power Options:
 - a) 24VAC @ 4 amp max.
 - b) 28VAC @ 3.5 amp max.
 - c) Both 24VAC and 28VAC not to exceed 3.5 amp max
- One (1) 24VAC output and one (1) 28VAC output.
- Fuse output rated @ 5 amp/250V.
- 115/230VAC input.

Enclosure dimensions: 13.31"H x 11.31"W x 5.59"D

WayPoint10ADU

- WayPoint10A with two (2) PTC protected outputs.

WayPoint17AU

- Output Power Options:
 - a) 24VAC @ 7.25 amp max.
 - b) 28VAC @ 6.25 amp max.
 - c) Both 24VAC and 28VAC not to exceed 6.25 amp max.
- One (1) 24VAC output and one (1) 28VAC output.
- Fuse output rated @ 10 amp/250V.
- 115/230VAC input.

Enclosure dimensions: 13.31"H x 11.31"W x 5.59"D

WayPoint17A4U

- WayPoint17A with four (4) 24VAC or 28VAC fuse protected outputs.

WayPoint17A4DU

- WayPoint17A with four (4) 24VAC or 28VAC PTC protected outputs.

146

Features:

- UL Listed in the US & Canada, CE Approved.
- Provides power for outdoor cameras, IR illuminators, security devices, etc.
- Surge suppression.
- Individual power output LED indicators.
- Illuminated master power switch.
- Spare fuses included.
- Integral flanges and lightweight design simplify mounting.
- NEMA 4/4X, IP66-11 Rated outdoor enclosure with lockable latches.



WAYPOINT17A4U

PMK1 - Pole Mount Kit available, see page 149

WAYPOINT™ OUTDOOR AC POWER SOLUTIONS

WayPoint30A

- Output Power Options:
 - a) 24VAC @ 12.5 amp max.
 - b) 28VAC @ 10 amp max.
 - c) Both 24VAC and 28VAC not to exceed 10 amp max.
- Two (2) 24VAC outputs and two (2) 28VAC outputs.
- Fuse output rated @ 15 amp/32V.
- 115/230VAC input.

Enclosure dimensions: 13.31"H x 11.31"W x 5.59"D

WayPoint30A4U

- WayPoint30A with four (4) 24VAC or 28VAC fuse protected outputs.

WayPoint30A4DU

- WayPoint30A with four (4) 24VAC or 28VAC PTC protected outputs.

WayPoint30A8U

- WayPoint30A with eight (8) 24VAC or 28VAC fuse protected outputs.

WayPoint30A8DU

- WayPoint30A with eight (8) 24VAC or 28VAC PTC protected outputs.

WayPoint307A

- Output Power Options:
 - a) 24VAC @ 12.5 amp max.
 - b) 28VAC @ 10 amp max.
 - c) Both 24VAC and 28VAC not to exceed 10 amp max.
- Two (2) 24VAC outputs and two (2) 28VAC outputs.
- Output fuses rated @ 15 amp/32V.
- 277VAC input.
- This unit is not UL Listed.

Enclosure dimensions:
13.31"H x 11.31"W x 5.59"D



WAYPOINT30A

147

Features:

- UL Listed in the US and Canada, CE Approved.
- Provides power for outdoor cameras, IR illuminators, security devices, etc.
- Surge suppression.
- Individual power output LED indicators.

- Illuminated master power switch.
- Spare fuses included.
- Integral flanges and lightweight design simplify mounting.
- NEMA 4/4X, IP66-11 Rated outdoor enclosure with lockable latches.



PMK1 - Pole Mount Kit available, see page 149

WAYPOINT™ OUTDOOR DC POWER SOLUTIONS

Single Output

WayPoint3

- 2.5 amp @ 12VDC or 24VDC.
- 115/230VAC input.

Enclosure dimensions:

13.31"H x 11.31"W x 5.59"D

WayPoint5

- 3.5 amp @ 12VDC or 24VDC.
- 115/230VAC input.

Enclosure dimensions:

13.31"H x 11.31"W x 5.59"D

WayPoint7

- 6 amp @ 12VDC or 24VDC.
- 115VAC input.

Enclosure dimensions:

13.31"H x 11.31"W x 5.59"D

WayPoint7V

- Same as Waypoint7 with 230VAC input.

WayPoint104

- 10 amp @ 24VDC.
- 115VAC input.

Enclosure dimensions:

13.31"H x 11.31"W x 5.59"D

148

Features:

- CE Approved.
- Provides power for outdoor cameras, IR illuminators, security devices, etc.
- AC and DC power LED indicators.
- Includes battery leads.
- Integral flanges and lightweight design simplify mounting.
- NEMA 4/4X, IP66-11 Rated outdoor enclosure with lockable latches.

CE



PMK1- Pole Mount Kit available, see page 149


OUTDOOR POLE MOUNT KIT

PMK1

- Designed to simplify installation of any Altronix outdoor rated power supplies and accessories housed in WP1, WP3 and WP4 NEMA rated enclosures.

Features:

- Simplifies mounting and overall installation.
- Accommodates 2"- 8" (diameter) pole or 5" square pole.
- Kit includes: two (2) powder coated steel mounting brackets, two (2) wormgear quick release straps, four (4) stainless steel bolts and lock washers.

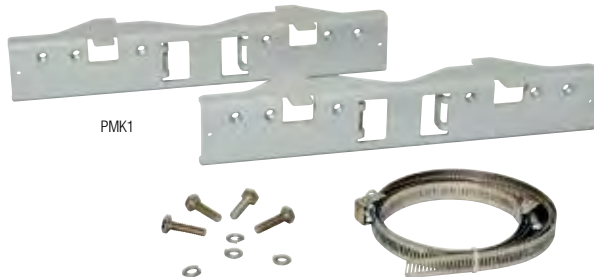

PMK1





RACK MOUNT AC/DC POWER SOLUTIONS

VERTILINE®

Centralized power for AC or DC
cameras/devices

VERTILINE[®] RACK MOUNT AC POWER SUPPLIES

Eight (8) Output

VertiLine8C

- UL Listed in the U.S. and Canada for CCTV.
- 115VAC input.
- 5 amp @ 24VAC or 28VAC total output current.
- Eight (8) fuse protected outputs.

VertiLine8

- VertiLine8C with 115/230VAC selectable input.
- UL Listed in the U.S. for CCTV.

VertiLine83C

- UL Listed in the U.S. and Canada for CCTV.
- 115VAC input.
- 10 amp @ 24VAC or 28VAC total output current.
- Eight (8) fuse protected outputs.

VertiLine83

- VertiLine83C with 115/230VAC selectable input.
- UL Listed in the U.S. for CCTV.

Eight (8) Output with Isolation

VertiLine8i

- UL Listed in the U.S. and Canada for CCTV.
- 115VAC or 230VAC selectable input.
- 8 amp @ 24VAC or 28VAC total output current (1 amp max per output).
- Electronically isolated camera power.
- Eight (8) fuse protected isolated outputs.



Features:

- Individually selectable 24VAC or 28VAC power outputs with OFF position.
- Illuminated master power switch.
- Power LED indicators.
- External easy to replace blade type fuses.
- Spare fuses provided (all models with primary and/or secondary fuses).
- Removable terminal blocks with locking screw flanges.
- IEC 320 - 3-wire grounded line cord (detachable).
- Compact 1U EIA 19" rack mount chassis.
- Units can be rack, shelf or wall mounted.



VERTILINE8C

*All VertiLine models are available with PTC protected outputs.
Add suffix "D" to model number (i.e. VertiLine8CD).
For isolated models add suffix "Di" to model number (i.e. VertiLine8Di).*

151

VERTILINE[®] RACK MOUNT AC POWER SUPPLIES

Sixteen (16) Output

VertiLine16C

- UL Listed in the U.S. and Canada for CCTV.
- 115VAC input.
- 10 amp @ 24VAC or 28VAC total output current.
- Sixteen (16) fuse protected outputs.

VertiLine16

- VertiLine16C with 115/230VAC selectable input.
- UL Listed in the U.S. for CCTV.

VertiLine166C

- UL Listed in the U.S. and Canada for CCTV.
- 115VAC input.
- 14 amp @ 24VAC or 28VAC total output current.
- Sixteen (16) fuse protected outputs.

VertiLine166

- VertiLine166C with 115/230VAC selectable input.
- UL Listed in the U.S. for CCTV.

Sixteen (16) Output with Isolation

VertiLine16i

- UL Listed in the U.S. and Canada for CCTV.
- 115VAC or 230VAC selectable input.
- 16 amp @ 24VAC or 28VAC total output current (1 amp max per output).
- Sixteen (16) fuse protected isolated outputs.



Features:

- Individually selectable 24VAC or 28VAC power outputs with OFF position.
- Illuminated master power switch.
- Power LED indicators.
- External easy to replace blade type fuses.
- Spare fuses provided (all models with primary and/or secondary fuses).
- Removable terminal blocks with locking screw flanges.
- IEC 320 - 3-wire grounded line cord (detachable).
- Compact 1U EIA 19" rack mount chassis.
- Units can be rack, shelf or wall mounted.



All VertiLine models are available with PTC protected outputs.
Add suffix "D" to model number (i.e. VertiLine16CD).
For isolated models add suffix "Di" to model number (i.e. VertiLine16Di).

VERTILINE[®] RACK MOUNT AC POWER SUPPLIES

Twenty-four (24) Output

VertiLine24C

- UL Listed in the U.S. and Canada for CCTV.
- 115VAC input.
- 10 amp @ 24VAC or 28VAC total output current.
- Twenty-four (24) fuse protected outputs.

VertiLine24

- VertiLine24C with 115/230VAC selectable input.
- UL Listed in the U.S. for CCTV.

VertiLine246C

- UL Listed in the U.S. and Canada for CCTV.
- 115VAC input.
- 14 amp @ 24VAC or 28VAC total output current.
- Twenty-four (24) fuse protected outputs.

VertiLine246

- VertiLine246C with 115/230VAC selectable input.
- UL Listed in the U.S. for CCTV.



Features:

- Individually selectable 24VAC or 28VAC power outputs with OFF position.
- Illuminated master power switch.
- Power LED indicators.
- External easy to replace blade type fuses.
- Spare fuses provided (all models with primary and/or secondary fuses).
- Removable terminal blocks with locking screw flanges.
- IEC 320 - 3-wire grounded line cord (detachable).
- Compact 1U EIA 19" rack mount chassis.
- Units can be rack, shelf or wall mounted.

All VertiLine models are available with PTC protected outputs. Add suffix "D" to model number (i.e. VertiLine24CD).

VERTILINE24C



153

VERTILINE® RACK MOUNT DC POWER SUPPLIES

Eight (8) Output

VertiLine3D

- 8 amp @ 12VDC total output current.
- Eight (8) PTC protected outputs.

VertiLine6D

- 8 amp @ 24VDC total output current.
- Eight (8) PTC protected outputs.

Sixteen (16) Output

VertiLine33D

- 8 amp @ 12VDC total output current.
- Sixteen (16) PTC protected outputs.

VertiLine33TD

- 16 amp @ 12VDC total output current.
- Sixteen (16) PTC protected outputs.

VertiLine63D

- 8 amp @ 24VDC total output current.
- Sixteen (16) PTC protected outputs.

VertiLine63TD


- 16 amp @ 24VDC total output current.
- Sixteen (16) PTC protected outputs.

Features:

- CE Approved.
- 115VAC input.
- Power LED indicators.
- Filtered and electronically regulated outputs.
- Illuminated master power switch.
- Removable terminal blocks w/locking screw flanges.
- Blade fuses are external on fuse protected models.
- IEC 320 - 3-wire grounded line cord (detachable).
- Compact 1U EIA 19" rack mount chassis.
- Units can be rack, shelf or wall mounted.



154

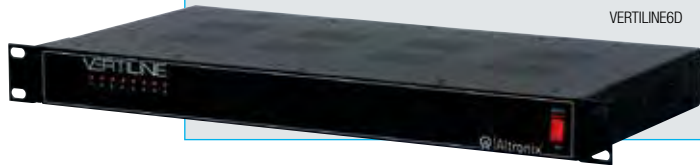

RACK MOUNT AC POWER SUPPLIES

Eight (8) Output

R248UL

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 3.5 amp @ 24VAC or 3 amp @ 28VAC max. power.
- Eight (8) fuse protected non power-limited outputs.

R248ULCB

- R248UL with Eight (8) Class 2 Rated PTC protected power-limited outputs.

Sixteen (16) Output

R2416UL

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 7 amp @ 24VAC or 6 amp @ 28VAC max. power.
- Sixteen (16) fuse protected non power-limited outputs.

R2416ULCB

- R2416UL with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.

R2416300UL

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 12.5 amp @ 24VAC or 10 amp @ 28VAC max. power.
- Sixteen (16) fuse protected non power-limited outputs.

R2416300ULCB

- R2416300UL with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.

Features:

- 115VAC 60Hz. input (220VAC versions available, not UL/CUL Listed).
- Illuminated master power switch.
- Power LED indicators.
- Spare fuses provided (all models with primary and/or secondary fuses).
- Removable terminal blocks with locking screw flanges.
- 3-wire grounded line cord.
- 2U rack mount chassis for use in standard EIA 19" rack.



RACK MOUNT AC POWER SUPPLIES

*Sixteen (16) Output***R2416600UL**

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 25 amp @ 24VAC or 20 amp @ 28VAC max. power.
- Sixteen (16) fuse protected non power-limited outputs.

R2416600ULCB

- R2416600UL with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.

*Thirty-two (32) Output***R2432300UL**

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 12.5 amp @ 24VAC or 10 amp @ 28VAC max. power.
- Thirty-two (32) fuse protected non power-limited outputs.

R2432300ULCB

- R2432300UL with Thirty-two (32) Class 2 Rated PTC protected power-limited outputs.

R2432600UL

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 25 amp @ 24VAC or 20 amp @ 28VAC max. power.
- Thirty-two (32) fuse protected non power-limited outputs.

R2432600ULCB

- R2432600UL with Thirty-two (32) Class 2 Rated PTC protected power-limited outputs.

156

Features:

- 115VAC 60Hz input (220VAC versions available, not UL/CUL Listed).
- Illuminated master power switch.
- Power LED indicators.
- Spare fuses provided (all models with primary and/or secondary fuses).
- Removable terminal blocks with locking screw flanges.
- 3-wire grounded line cord.
- 2U rack mount chassis for use in standard EIA 19" rack.



ISOLATED RACK AC MOUNT POWER SUPPLIES

*Eight (8) Output***R248ULi**

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 12.5 amp @ 24VAC max. power.
- Eight (8) 1.56 amp fuse protected non power-limited electronically isolated outputs.

R248ULCBI

- R248ULi with Eight (8) Class 2 Rated PTC protected power-limited outputs.

*Sixteen (16) Output***R2416ULi**

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 25 amp @ 24VAC max. power.
- Sixteen (16) 1.56 amp fuse protected non power-limited electronically isolated outputs.

R2416ULCBI

- R2416ULi with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.

Features:

- 115VAC 60Hz input (220VAC versions available, not UL/CUL Listed).
- Illuminated master power switch.
- Power LED indicators.
- Spare fuses provided (all models with primary and/or secondary fuses).
- Removable terminal blocks with locking screw flanges.
- 3-wire grounded line cord.
- 2U rack mount chassis for use in standard EIA 19" rack.



RACK MOUNT DC POWER SUPPLIES

*Eight (8) Output***R615DC8UL**

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 4 amp @ 6-15VDC max. power.
- Eight (8) Class 2 Rated fuse protected power-limited outputs.

R615DC8ULCB

- R615DC8UL with Eight (8) Class 2 Rated PTC protected power-limited outputs.

*Sixteen (16) Output***R615DC416UL**

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 4 amp @ 6-15VDC max. power.
- Sixteen (16) Class 2 Rated fuse protected power-limited outputs.

R615DC416ULCB

- R615DC416UL with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.

R615DC616UL

- UL Listed in the U.S. and Canada for CCTV, CE Approved.
- 6 amp @ 6-15VDC max. power.
- Sixteen (16) fuse protected non power-limited outputs.

R615DC616ULCB

- R615DC616UL with Sixteen (16) Class 2 Rated PTC protected power-limited outputs.

158

Features:

- 115VAC 60Hz input (220VAC versions available, not UL/CUL Listed).
- Illuminated master power switch.
- Filtered and electronically regulated output(s).
- Short circuit and thermal overload protection.
- Power LED indicators.
- Removable terminal blocks with locking screw flanges.
- 3-wire grounded line cord.
- 2U rack mount chassis for use in standard EIA 19" rack.



R615DC616UL

RACK MOUNT DC POWER SUPPLIES

Sixteen (16) Output

R615DC1016

- 10 amp @ 6-15VDC max. power.
- Sixteen (16) fuse protected outputs.

R615DC1016CB

- R615DC1016 with Sixteen (16) PTC protected outputs.

Features:

- 115VAC 50/60Hz. input (220VAC versions available).
- Illuminated master power switch.
- Filtered and electronically regulated outputs.
- Short circuit and thermal overload protection.
- Power LED indicators.
- Removable terminal blocks with locking screw flanges.
- 3-wire grounded line cord.
- 2U rack mount chassis for use in standard EIA 19" rack.

Sixteen (16) Output

R1224DC16CB

- UL Listed in the U.S. and Canada for Specialty Power Supply.
- Sixteen (16) Class 2 Rated PTC protected power-limited outputs.
- Groups of four (4) outputs are selectable for 12VDC or 24VDC.
- 18 amp total output.



R1224DC16CB

Features:

- 115VAC 60Hz. input.
- Illuminated master power switch.
- Filtered and electronically regulated outputs.
- Short circuit and thermal overload protection.
- Power LED indicators.
- Removable terminal blocks with locking screw flanges.
- 3-wire grounded line cord.
- 2U rack mount chassis for use in standard EIA 19" rack.



* Unit does not charge batteries.



Tempo

MULTI-FUNCTION TIMERS

Universal 2-Stage Timers

Tempo UNIVERSAL TWO STAGE TIMER

Tempo2

- Digital Test / Trigger Mode Timer is suitable for applications that require a timed operation. e.g. delayed egress with a programmable 1-60 second door release after delay expires, door prop alarm, door annunciator, alarm swinger eliminator, etc.
- Board dimensions: 2.55"L x 3.0"W x 0.7"H


Features:

- 12 to 24VAC or VDC operation.
- Trigger input DC triggers via dry contact closure, or removal of contact closure.
- Output dry Form "C" contacts are 2 amp @ 120VAC/28VDC.
- Current draw: stand-by 15mA, relay energized 30mA.
- LCD display for ease of programming, and countdown feature.
- Dual function: test timer/one shot.
- EE Prom memory protects against loss of programming due to power failure.
- Simple programming.

One-shot features (trigger activated):

- Programmable relay activation at the start or end of the timing cycle.
 - Delayed Pulse Mode: 1 to 60 sec. programmable pulse at the end of timing cycle.
 - Delay Mode: Relay can be programmed to energize or de-energize during timing cycle (Digitally adjust from 1 sec.-24 hours).

Delayed Egress:

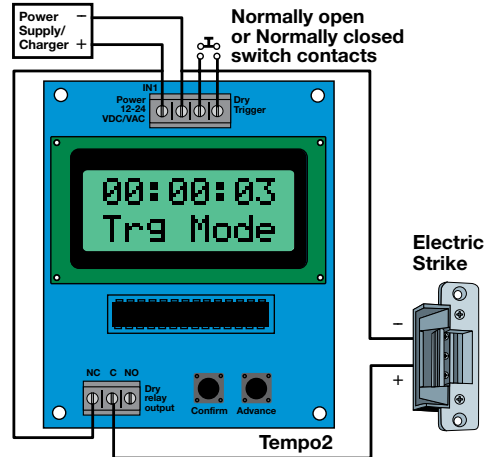

161

ANNUAL EVENT TIMERS

PT724A

- Single channel annual event timer.
- 12 to 24VAC or VDC operation.
- Stand-by current: 10mA (relay off) 50mA (relay on).
- Form "C" relay contacts are rated 10 amp @ 115VAC/28VDC.
- 50 individually programmed daily/weekly events.
- Block programming accommodates a total of 350 events per week.
- Ten (10) programmable Holiday dates.
- EE Prom memory protects against loss of programming due to power failure.

162 Board dimensions: 5.25"L x 3"W x 1.1"H

PT724AE

- PT724A in enclosure.
- Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

PT2724

- Two (2) channel annual event timer.
- 12 to 24VAC or VDC operation.
- Stand-by current: 10mA (relay off) 50mA (relay on) (per channel).
- Two (2) form "C" relay contacts are rated 10 amp @ 115VAC/28VDC.
- Tandem relay mode allows both channels to activate simultaneously for all events.
- 50 individually programmed daily/weekly events (per channel).
- Block programming accommodates a total of 350 events per week per channel.
- Ten (10) programmable Holiday dates per channel.
- EE Prom memory protects against loss of programming due to power failure.

Board dimensions: 5.25"L x 3.6"W x 1.1"H

PT2724E

- PT2724 in enclosure.
- Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

AT4B

- Four (4) channel annual event timer.
- 12 to 24VAC or VDC operation.
- Stand-by current: 20mA (relay off) 40mA (relay on) (per relay).
- Four (4) form "C" relay contacts @ 115VAC/28VDC.
- Each relay operates independently.
- Momentary and/or latching events.
- 254 individually programmed daily/weekly events.
- Block programming accommodates a total of 1778 events per week.
- 254 programmable Holiday events.
- EE Prom memory protects against loss of programming due to power failure.

Board dimensions: 7"L x 5.5"W x 1.2"H

AT4

- AT4B in enclosure.
- Enclosure dimensions:
12.25"H x 7.75"W x 4.5"D

Features:

- "First man in" option.
- Standard or daylight savings time setting.
- Automatic compensation for leap year.
- Built-in charger for 12VDC sealed lead acid or gel type batteries.
- Lithium battery backup maintains clock (optional).

AT4B



MULTI-FUNCTION TIMERS

6062


- Multi-function timer.
 - 12VDC or 24VDC operation.
 - Form "C" relay contacts are 8 amp at 120VAC/28VDC.
 - Current draw: stand-by 3mA, relay energized 40mA.
 - Triggers via positive DC (+) voltage, dry contact closure, or removal of contact closure.
 - Selectable relay activation at the start or end of the timing cycle.
 - One (1) second momentary relay activation at the end of the timing cycle (eliminates the need to use two (2) timers for this function).
 - Built-in reset feature which cancels timing cycle.
 - Applications include: access control, siren/bell cut off, dialer delay, guard tour supervisory, door ajar, etc.
 - Snap Track compatible (order part# ST3)
 - DIN rail mountable version available (order model# DTMR1).
- Board dimensions: 3"L x 2.5"W x .75"H

Features:

- Quick and extremely accurate time range adjustment from 1 second to 60 minutes.
- Power LED indicator.
- Repeat (pulsar/flasher mode).

6030

- Multi-function timer.
 - Bell cut off/delay timer.
 - 6VDC or 12VDC operation.
 - Form "C" relay contacts are 8 amp at 115VAC/28VDC.
 - Current draw: stand-by 3mA, relay energized 75mA.
 - Relay activates at the end of the timing cycle.
 - Applications include: siren/bell cut off, dialer delay, door ajar, etc.
 - Snap Track compatible (order part# ST3)
- Board dimensions: 3"L x 2.5"W x .75"H

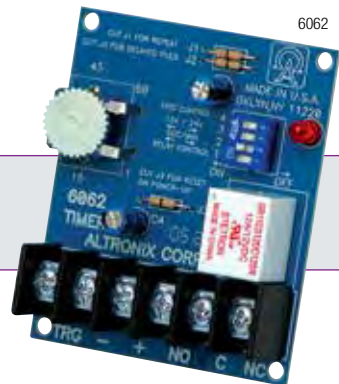

6062

DOOR TIMERS

DL1

- Door control timer.
- 12 to 24 AC or DC operation.
- Dry relay output (1 Dry form "C" contact, rated @ 2 amp).
- Isolated AC or DC voltage 5V-24V trigger.
- Time adjustable from 1 second to 1 minute.
- 12VDC regulated sounder output.
- Momentary or maintained trigger.


Board dimensions: 1.5"L x 4"W x .75"H

DL3

- Door control timer.
- 12 to 24 AC or DC operation.
- Rectified voltage output.
- Isolated AC or DC voltage 5V-24V trigger.
- Time adjustable from 1 second to 1 minute.
- On-board sounding device.
- Momentary or maintained trigger.
- Powers 12VDC locks and strikes (300mA max.).

Board dimensions: 1.5"L x 4"W x .75"H

164

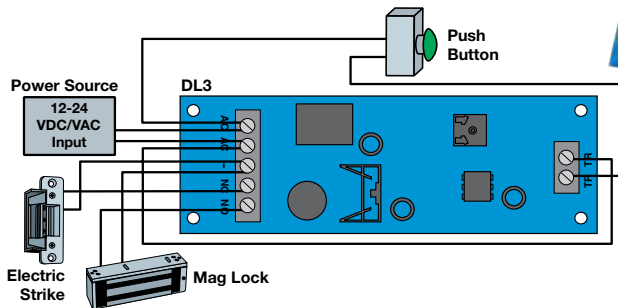

RELAY WITH BASE

*AC Models***RAC24**

- 24VAC operation.
- Current draw 45mA.

RAC120

- 120VAC operation.
- Current draw 12mA.

*DC Models***RDC12**

- 12VDC operation.
- Current draw 86mA.

RDC24

- 24VDC operation.
- Current draw 43mA.

RDC48

- 48VDC operation.
- Current draw 20mA.

**Features:**

- UL Recognized.
- DPDT contacts rated at 10 amp/220VAC or 28VDC.
- DIN Rail mountable.



RELAY MODULES

*(UL Listed)***RBUL**

- UL Listed Burglar Alarm.
 - 12VDC or 24VDC selectable operation.
 - Current draw 30mA.
- Board dimensions: 2.75"L x 2"W x 1.25"H

RBTUL

- UL Listed Burglar Alarm.
 - 12VDC or 24VDC selectable operation.
 - 3VDC to 24VDC, 2mA positive (+) trigger.
 - Current draw 30mA.
- Board dimensions: 2.75"L x 2"W x 1.25"H

Features:

- SPDT contacts rated at 1 amp/28VDC.
- DIN Rail mountable
Includes snap track (ST1).



RBTUL

165

* Refer to page 179 for DIN Rail Mounting Accessories.

RELAY MODULES

RB1224

- 12VDC or 24VDC selectable operation.
 - Current draw 75mA.
 - DPDT contacts rated at 5 amp/220VAC or 28VDC.
 - Snap track mountable (order part# ST1).
- Board dimensions: 2"L x 2.75"W x 1"H

RB30

- 12VDC or 24VDC selectable operation.
 - Current draw 95mA.
 - SPDT contacts rated at 30 amp/120VAC or 28VDC.
 - Heavy duty load switching applications.
 - Snap track mountable (order part# ST1).
- Board dimensions: 2"L x 2.75"W x .75"H

RBSN

- 12VDC or 24VDC selectable operation.
 - Current draw 15mA.
 - DPDT contacts rated at 1 amp/120VAC or 2 amp/28VDC
 - Snap track mountable (order part# ST1).
- Board dimensions: 2"L x 2.75"W x 1"H

RBSNTTL

- Ultra sensitive relay.
 - 12VDC to 24VDC selectable operation.
 - 3VDC to 24VDC, 2mA isolated positive or negative trigger.
 - Current draw 18mA.
 - DPDT contacts rated at 1 amp/120VAC or 2 amp/28VDC.
 - Snap track mountable (order part# ST1).
- Board dimensions: 2.75"L x 1.9"W x 1.1"H

RBST

- 6VDC, 12VDC or 24VDC selectable operation.
 - Current draw 30mA.
 - DPDT contacts rated at 1 amp/120VAC or 2 amp/28VDC.
 - Snap track mountable (order part# ST1).
- Board dimensions: 2.75"L x 1.9"W x 1.1"H

RB5

- 6VDC or 12VDC selectable operation.
 - Current draw 120mA.
 - DPDT contacts rated at 5 amp/220VAC or 28VDC.
 - Snap track mountable (order part# ST1).
- Board dimensions: 2.75"L x 1.9"W x 1.35"H

RB524

- 24VDC operation.
 - Current draw 40mA.
 - DPDT contacts rated at 5 amp/220VAC or 28VDC.
 - Snap track mountable (order part# ST1).
- Board dimensions: 2.75"L x 1.9"W x 1.35"H



* Refer to page 179 for DIN Rail Mounting Accessories.

RELAY MODULES

RB7

- Ultra sensitive relay cluster.
 - 12VDC or 24VDC selectable operation.
 - 3VDC to 24VDC positive trigger inputs.
 - Seven (7) independent isolated SPDT contacts rated at 1 amp/120VAC or 28VDC.
- Board dimensions: 6.5"L x 3.25"W x 1"H

RBOC7

- Open collector module.
 - 12VDC or 24VDC selectable operation.
 - 3VDC to 24VDC positive trigger inputs.
 - Seven (7) independent open collector outputs capable of sinking 100mA each.
- Board dimensions: 6.5"L x 3.25"W x 1"H

RB610

- Break away relay 6 pack.
 - Each cluster contains six (6) relay modules which can easily be separated into quantity desired.
 - 12VDC or 24VDC selectable operation.
 - Current draw 50mA.
 - SPDT contacts rated at 10 amp/120VAC or 28VDC.
 - LEDs indicate relay is energized.
 - Terminals handle up to 12 gauge wire.
- Board dimensions: 2"L x 2.75"W x 1"H

RBR1224

- Electronic ratchet/toggle relay.
 - 12VDC to 24VDC selectable operation.
 - 3VDC to 24VDC positive or negative sensitive trigger inputs.
 - Current draw 20mA.
 - DPDT contacts rated at 0.5 amp/120VAC or 2 amp/28VDC.
 - LEDs indicate relay is energized.
 - Snap track mountable (order part# ST3).
- Board dimensions: 3"L x 2.5"W x 1"H

* Refer to page 179 for DIN Rail Mounting Accessories.



RB610

DIN RAIL PRODUCTS

Power Supply/Chargers

DPS1

- 1.2 amp @ 6VDC or 12VDC or .75 amp @ 24VDC supply current.
- PTC battery protection.
- Plug-in transformer required.*

Board dimensions: 3"L x 2.5"W x 1.5"H

DPS3

- 2.5 amp @ 6VDC, 12VDC or 24VDC.
- Transformer required.*

Board dimensions: 3.5"L x 3"W x 2"H

DPS5

- 4 amp @ 6VDC, 12VDC or 24VDC.
- Transformer required.*

Board dimensions:

3.5"L x 2.75"W x 1.75"H

Features:

- Filtered and electronically regulated output.
- Short circuit and thermal overload protection.
- Built-in charger for sealed lead acid or gel type batteries.
- AC input and DC power output LED indicators.
- Snap track, DIN Rail mounting clips and battery leads.

* Refer to page 177 for DIN Rail Mounting Accessories.

Power Distribution Modules

DP4

- Converts a single AC or DC input into four (4) individually fuse protected outputs.
 - Handles up to 48VAC/VDC.
 - Fuses are rated @ 3.5 amp/250V (Up to 5 amp fuses may be used).
 - Power ON/OFF switch.
 - Includes snap track and DIN Rail mounting clips.
- Board dimensions: 3"L x 2.5"W x 1.5"H

DP4CB

- DP4 with PTC protected outputs.
- PTCs are rated @ 2.5 amp.



DIN RAIL PRODUCTS

Multi-Function Timer

DTMR1

- 12VDC or 24VDC selectable operation.
- Quick and extremely accurate time range adjustment from 1 sec. to 60 min.
- Form "C" relay contacts are 8 amp at 120VAC/28VDC.
- Current draw: stand-by 3mA, relay energized 40mA.
- Triggers via positive DC (+) voltage, dry contact closure, or removal of contact closure.
- Selectable relay activation at the start or end of the timing cycle.
- One (1) second momentary relay activation at the end of the timing cycle (eliminates the need to use two (2) timers for this function).
- Built-in reset feature which cancels timing cycle.
- Repeat (pulser/flasher) mode.
- Includes snap track, DIN Rail mounting clips and battery leads.

Board dimensions: 3"L x 2.5"W x 1.5"H



Single Channel Annual Event Timer

DPT724A

- 12VDC to 24VDC selectable operation.
 - Stand-by current: 10mA (relay off) 50mA (relay on).
 - Battery charging current: 100mA.
 - Form "C" relay contacts are rated 10 amp @ 120VAC/28VDC.
 - EE Prom memory protects against loss of programming due to power failure.
 - Accurate crystal controlled clock.
 - Momentary and/or latching events.
 - 50 individually programmed daily/weekly events.
 - Block programming capacity can accommodate a total of 350 events per week.
 - 10 programmable Holiday dates.
 - "First man in" option.
 - Alphanumeric LCD display simplifies programming.
 - Standard or Daylight Savings Time settings.
 - Automatic compensation for leap year.
 - Built-in charger for 12VDC sealed lead acid or gel type batteries.
 - Max. charge current 100mA.
 - Lithium battery backup maintains clock (optional), (order part # LB2032).
 - Includes snap track, DIN Rail mounting clips and battery leads.
- Board dimensions: 5.25"L x 3"W x 1"H

* Refer to page 177 for DIN Rail Mounting Accessories.

POWER DISTRIBUTION MODULES

*Four (4) Output***PD4UL**

- UL Listed Sub-Assembly in the U.S. and Canada for Access Control and Burglar. UL Listed Sub-Assembly in the U.S. for Fire.
 - Operates 12VDC/24VDC up to 10 amp or 24VAC/28VAC @ 12 amp.
 - Four (4) fuse protected outputs.
- Board dimensions: 5.25"L x 3.25"W x 1"H

PD4ULCB

- Same as PD4UL with PTC protected power-limited outputs.
- PTCs are rated @ 2.5 amp.

*Eight (8) Output***PD8UL**

- UL Listed Sub-Assembly in the U.S. and Canada for Access Control and Burglar. UL Listed Sub-Assembly in the U.S. for Fire.
 - Operates 12VDC/24VDC up to 10 amp or 24VAC/28VAC @ 12 amp.
 - Eight (8) fuse protected outputs.
- Board dimensions: 5.25"L x 3.25"W x 1"H

PD8ULCB

- Same as PD8UL with PTC protected power-limited outputs.
- PTCs are rated @ 2.5 amp.

*Sixteen (16) Output***PD16W**

- UL Listed Sub-Assembly in the U.S. and Canada for Access Control and Burglar. UL Listed Sub-Assembly in the U.S. for Fire.
 - Operates 12VDC/24VDC up to 10 amp or 24VAC/28VAC @ 12 amp.
 - Sixteen (16) fuse protected outputs.
- Board dimensions: 5.875"H x 6"W x 1"H


PD16WCB

- Same as PD16W with PTC protected power-limited outputs.
- PTCs are rated @ 2.5 amp.

170

Features:

- Fused secondary output.



PD16W

POWER DISTRIBUTION MODULES

Four (4) Output

PD4

- Operates 28VAC or 28VDC up to 14 amp.
- Four (4) fuse protected outputs.
- Fuses are rated @ 3.5 amp/250V
(Up to 5 amp/250V fuses may be used).

Board dimensions: 5.25"L x 3.25"W x 1"H

PD4CB

- Same as PD4 with PTC protected outputs.
- PTCs are rated @ 2.5 amp.

Eight (8) Output

PD8

- Operates 28VAC or 28VDC up to 14 amp.
- Eight (8) fuse protected outputs.
- Fuses are rated @ 3.5 amp/250V
(Up to 5 amp/250V fuses may be used).

Board dimensions: 5.25"L x 3.25"W x 1"H

PD8CB

- Same as PD8 with PTC protected outputs.
- PTCs are rated @ 2.5 amp.

Features:

- Fused secondary output.



PD8

AC TRANSFORMERS

*115VAC Input***T1656**

- 16VAC/56VA (3.5 amp) supply current.

T16100

- 16VAC/100VA (6.25 amp) supply current.

T16175

- 16VAC/175VA (11 amp) supply current.

T2856

- 28VAC/56VA (2 amp) supply current.

T2428100

- 24VAC/100VA (4 amp)
or 28VAC/100VA (3.5 amp) supply current.



T2856

T2428175

- 24VAC/175VA (7.25 amp)
or 28VAC/175VA (6.25 amp) supply current.

**T2428300**

- 24VAC/300VA (12.5 amp)
or 28VAC/300VA (10 amp) supply current.

*115VAC/220VAC Input***T24130D**

- 24VAC/100VA (4 amp) supply current.

T2885D

- 28VAC/100VA (3.5 amp) supply current.

T28140D

- 28VAC/175VA (6.25 amp) supply current.

AC PLUG-IN TRANSFORMERS

TP1220

- 12VAC/20VA (1.7 amp) supply current.

TP1620

- 16.5VAC/20VA (1.2 amp) supply current.

TP1640

- 16.5VAC/40VA (2.4 amp) supply current.

TP1650

- 16.5VAC/50VA (3 amp) supply current.

TP2420

- 24VAC/20VA (0.8 amp) supply current.

TP2440

- 24VAC/40VA (1.67 amp) supply current.

TP2450

- 24VAC/50VA (2.1 amp) supply current.

Features:

- UL Listed.
- 115VAC input.
- Fused secondary output.



TRANSFORMERS WITH ENCLOSURES

T2856C

- 115VAC input.
- 28VAC/56VA (2 amp) supply current.
- Primary fuse rated @ 3.5A/250V.

Enclosure dimensions: 5.625"H x 7"W x 4.5"D

T2428100C

- 115VAC input.
- 24VAC/100VA (4 amp) or 28VAC/100VA (3.5 amp) supply current.
- Primary fuse rated @ 3.5A/250V.

Enclosure dimensions: 5.625"H x 7"W x 4.5"D

T2428100C220

- T2428100C with 220VAC input.

T24130CP220

- 220VAC input.
- 24VAC/100VA (4 amp) or 28VAC/100VA (3.5 amp) supply current.
- Primary fuse rated @ 3.5A/250V.

Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

T2428175C

- 115VAC input.
- 24VAC/175VA (7.25 amp) or 28VAC/175VA (6.25 amp) supply current.
- Primary fuse rated @ 10A/250V.

Enclosure dimensions:
5.625"H x 7"W x 4.5"D

T2428175C220

- T2428175C with 220VAC input.

T2428300E

- 115VAC input.
- 24VAC/300VA (12.5 amp) or 28VAC/280VA (10 amp) supply current.
- Primary fuse rated @ 15A/32V.

Enclosure dimensions:
12.5"H x 7.75"W x 4.5"D

173

Features:

- Fused input protection.
- Screw terminal blocks accommodate up to 12 gauge wires.



T2428100C

POWER SUPPLY/BATTERY/ACCESSORY ENCLOSURES

BC100

- 19 gauge grey enclosure with ample knockouts for convenient access.
- Fits one (1) 12VDC/7AH or two (2) 12VDC/4AH batteries.
- NEMA 1 enclosure.

Enclosure dimensions: 8.5"H x 7.5"W x 3.5"D

BC200

- 19 gauge grey enclosure with ample knockouts for convenient access.
- Fits one (1) 12VDC/7AH or two (2) 12VDC/4AH batteries.
- NEMA 1 enclosure.

Enclosure dimensions: 12.25"H x 7.75"W x 4.5"D

BC300

- 19 gauge grey enclosure with ample knockouts for convenient access.
- Fits two (2) 12VDC/7AH batteries.

Enclosure dimensions:
13.5"H x 13"W x 3.25"D

BC300R

- Red BC300 enclosure.


BC400

- 19 gauge grey enclosure with ample knockouts for convenient access.
- Fits two (2) 12VDC/12AH batteries.

Enclosure dimensions: 15.5"H x 12.23"W x 4.5"D

BC400R

- Red BC400 enclosure.



BC300

BC400SG

- BC400 and battery shelf which facilitates additional stand-by batteries up to four (4) 12VDC/12AH max.

BC400SR

- BC400R and battery shelf which facilitates additional stand-by batteries up to four (4) 12VDC/12AH max.

BC1240

- 19 gauge grey enclosure with ample knockouts for convenient access.
- Fits one (1) 12VDC/40AH battery.

Enclosure dimensions: 9.5"H x 9.5"W x 7.5"D

BC600

- 19 gauge red enclosure with ample knockouts for convenient access.
- Fits up to four (4) 12VDC/7AH batteries.

Enclosure dimensions: 18"H x 14.5"W x 4.625"D

BC600G

- Grey BC600 enclosure.

BC800

- 16 gauge grey enclosure with ample knockouts for convenient access.
- Fits up to four (4) 12VDC/12AH batteries.

Enclosure dimensions: 26"H x 19"W x 6.25"D

CAB4

- Grey enclosure.
- Fits one (1) 12VDC/12AH or one (1) 12VDC/7AH battery.

Enclosure dimensions: 5.625"H x 7"W x 4.5"D

POWER SUPPLY/BATTERY/ACCESSORY ENCLOSURES

Outdoor Rated Enclosures

WP1

- NEMA 4/IP 65 Rated enclosure for outdoor use.
 - Fits up to two (2) 12VDC/7AH batteries.
- Enclosure dimensions: 14"H x 8"W x 6"D

WP2

- NEMA 4/IP 66 Rated enclosure for outdoor use.
 - Fits up to two (2) 12VDC/12AH batteries.
- Enclosure dimensions:
17.53"H x 15.3"W x 6.67"D

WP3

- NEMA 4/4X IP66-11 Rated enclosure for outdoor use.
 - Fits up to two (2) 12VDC/12AH batteries.
- Enclosure dimensions:
13.31"H x 11.31"W x 5.59"D

WP4

- NEMA 4/4X IP66-11 Rated enclosure for outdoor use.
- Enclosure dimensions:
9.32"H x 7.32"W x 4.92"D



NEMA Rated Glands

WG1

- Wire inlet for WP2, WP3 and WP4.



Outdoor Pole Mount Kit

PMK1

- Pole mount kit for outdoor enclosures.
- Kit includes powder coated steel mount brackets, stainless steel bolts, washers and straps. (Refer to page 149)

Optional Battery Brackets

BCS4G

- Grey bracket fits BC400G enclosure allows the addition of two (2) 12VDC/12AH batteries. For a total of up to four (4) 12VDC/12AH batteries.
- Bracket dimensions: 3.5"H x 11.5"W x 3.75"D

BCS4R

- Red bracket fits BC400G enclosure allows the addition of two (2) 12VDC/12AH batteries. For a total of up to four (4) 12VDC/12AH batteries.
- Bracket dimensions: 3.5"H x 11.5"W x 3.75"D

BATTERIES & COMPONENT ACCESSORIES

*Rechargeable Sealed
Lead Acid***BT124**

- 12VDC/4AH.

Battery dimensions:
3.54"L x 2.76"W
x 4.02"H (4.17"TH)

**BT126**

- 12VDC/7AH.

Battery dimensions:
5.94"L x 2.56"W x 3.66"H (3.86"TH)

176

BT1212

- 12VDC/12AH.

Battery dimensions:
5.94"L x 3.86"W x 3.70"H (3.86"TH)

BT1240

- 12VDC/40AH.

Battery dimensions:
7.72"L x 6.50"W x 6.73"H (6.73"TH)

Altronix® provides a wide range of sealed lead acid batteries ranging up to 40 amp/hr capacity. Our most commonly requested models are listed above.

*Lithium***LB2032**

- Lithium battery for models AT4, AT4B, DPT724A, PT724A and PT2724.

*Rack Mount
Battery Enclosure***RE2**

- Fits up to four (4) 12VDC/7AH batteries.
- 2U rack mount chassis for use in standard EIA 19" rack.



(order batteries separately)

*Replacement Fuses***BF3**

- 3 amp blade fuse.
- Package of 25.

BF5

- 5 amp blade fuse.
- Package of 25.



BF10

*Replacement Fuses***BF10**


- 10 amp blade fuse. Package of 25.

BF15

- 15 amp blade fuse. Package of 25.

FUSE1

- 3.5 amp fuse (3AG).
- Package of 100.



FUSE1

FUSE2

- 5 amp fuse (3AG).
- Package of 100.

FUSE3

- 10 amp fuse (3AG). Package of 100.

FUSE4

- 1 amp fuse (3AG). Package of 100.

FUSE5

- 5 amp slow blow fuse (3AG).
- Package of 100.

FUSE6

- 15 amp slow blow fuse (3AG).
- Package of 100.

COMPONENT ACCESSORIES

DIN Rail Mounting Accessories

CLIP1

- Two (2) DIN Rail mounting clips.

D10

- 10" DIN Rail
(other lengths are available).



D10

DK1

- DIN Rail mount kit.
- ST3 and two (2) DIN Rail mounting clips

ST1

- Snap Track for models RB5, RB1224, RBSN, RBST and RB30.

ST2

- Snap Track for models RB7, RBOC7.

ST3

- Snap Track for models AL624, SMP3, SMP5, AL175ULB, AL176ULB, 6030, 6062 and PT724A.

Battery/Grounding Leads

BL2

- 8" pair of black and red battery leads (18 AWG).

BL3

- 18" pair of black and red battery leads (18 AWG).



BL3

BL3KSP

- 18" pair of black and red battery leads and (4) 8" yellow jumpers (18 AWG).

BL4

- 8" yellow battery series jumper (18 AWG).

BL6

- 68" pair of black and red battery leads (16 AWG).

GL1

- 8" green grounding lead (12 AWG).

Line Cords

LC1

- 6 ft. Two-wire line cord.

LC2

- 6 ft. Three-wire line cord.



BNC24J

Misc. Accessories

BNC24J

- 24" BNC jumper.

CAM1

- Cam lock for enclosures (excludes WP1 and WP2).

CP1

- Mounting plate. Used to mount two (2) boards (PD4, PD8 or MOM5) side by side in BC400 or BC500 enclosures.

SPACER1

- 5/8" nylon spacers (standoffs).
Package of 25.

TAPE1

- Two-side adhesive pads. Package of 25.

WG1

- Wire inlet for WP2, WP3 and WP4.

WG1



WM25

- Magnetic cable tie mount.

WPL1

- Cam lock for WP1 enclosure.

AGENCY LISTING GLOSSARY



UL Listed for U.S. installations

UL Listed for U.S.
and Canadian installations

UL Canada



European Conformity.



UL Recognized Component.



UL Recognized Component for Canada.

UL 294 UL Listed for Access Control Systems Units (Access).

UL 603 UL Listed Power Supplies for use with Burglar-Alarm Systems (Burglar).

UL 864 UL Listed Control Units for Fire Protective Signaling Systems (Fire).

UL 1012 UL Listed Specialty Power Supply.

UL 1069 UL Listed Hospital Signaling and Nurse Call Equipment (Nurse Call).

UL 1481 UL Listed Power Supplies for Fire Protective Signaling Systems (Fire).

UL 2044 UL Listed Commercial Closed-Circuit Television Equipment (CCTV/Surveillance).

UL 60950-1 UL Listed for Information Technology Equipment.

cUL Listed CSA Standard C22.2 No.1-98, Audio, Video and Similar Equipment (CCTV/Surveillance).
CSA Standard C22.2 No.205-M1983, Signal Equipment (Access).

CAN/ULC-S527-99 Control units for Fire Alarm Systems.

ULC-S318-96 Power Supplies for Burglar Alarm Systems. Also suitable for Access Control (Burglar/Access).

ULC-S319-05 Electronic Access Control Systems.



C-Tick Approved.



CSFM - California State Fire Marshal Approved.



FM - Factory Mutual Approved.

PRODUCT SHIPPING WEIGHTS (APPROXIMATE LBS.)

Model #	Weight	Model #	Weight	Model #	Weight	Model #	Weight	Model #	Weight
6030.....	0.15	AL176UL.....	5.6	AL62412C.....	4.6	BC100.....	4.15	DTMR1.....	0.25
6062.....	0.15	AL176ULB.....	0.4	AL62412CX.....	6.3	BC200.....	5.65	eBridge100SPR.....	0.5
ACM4(CB).....	0.35	AL176ULX.....	9.4	AL642ULADA.....	18.05	BC300(R).....	7.7	eBridge100STR.....	0.45
ACM4E(CBE).....	6.7	AL201UL.....	4.75	AL802ULADA.....	13.3	BC400(R).....	10.05	eBridge100ST.....	0.25
ACM8(CB).....	0.85	AL300ULM.....	8.75	AL842ULADA.....	19.15	BC400SG.....	11.2	eBridge1CR.....	0.4
ACM8E(CBE).....	10.65	AL300ULPD4(CB).....	8.7	ALSD1.....	0.15	BC400SR.....	11.2	eBridge1CRT.....	1.0
ACMS8(CB).....	0.85	AL300ULPD8(CB).....	8.75	ALSD2.....	0.15	BC600(G).....	13.4	eBridge1CT.....	0.4
AL100UL.....	6.9	AL300ULXPD16(CB).....	11.2	ALTV1224C.....	17.75	BC800.....	29.6	eBridge1PCR.....	0.6
AL1002ULADA.....	13.3	AL300ULX.....	8.45	ALTV1224C4.....	14.5	BC1240.....	7.3	eBridge1PCRM.....	0.6
AL1012ULACM(CB).....	12.0	AL300ULXB2.....	0.8	ALTV2416UL(CBi).....	25.9	BCS4G.....	0.6	eBridge1PCRMt.....	1.0
AL1012ULM.....	11.45	AL300ULXD.....	13.0	ALTV2416ULX(CBX).....	15.2	BCS4R.....	0.6	eBridge1PCRT.....	1.0
AL1012ULX.....	11.15	AL400UL.....	12.4	ALTV2416300UL(CB).....	18.7	BF3.....	0.15	eBridge1PCRTX.....	1.0
AL1012ULXPD4(CB).....	11.4	AL400UL3.....	8.7	ALTV2416300ULM(CBM).....	14.1	BF5.....	0.15	eBridge1PCRX.....	0.6
AL1012ULXPD8(CB).....	11.55	AL400UL3X.....	11.95	ALTV2416600UL(CB).....	25.6	BF10.....	0.15	eBridge1PCT.....	0.6
AL1012ULXPD16(CB).....	11.65	AL400ULACM(CB).....	11.4	ALTV2432300UL(CB).....	19.5	BF15.....	0.15	eBridge1PCTX.....	0.6
AL1012ULXB.....	0.9	AL400ULB.....	1.25	ALTV2432600UL(CB).....	25.6	BL2.....	0.15	eBridge1ST.....	0.4
AL1024ULACM(CB).....	11.6	AL400ULM.....	9.05	ALTV244175UL(CB).....	11.8	BL3.....	0.15	eBridge1STR.....	1.0
AL1024ULM.....	11.45	AL400ULPD4(CB).....	9.0	ALTV244300WP(CB).....	18.1	BL3KSP.....	0.15	eBridge200WPM(H).....	3.2
AL1024ULX.....	11.15	AL400ULPD8(CB).....	9.05	ALTV244UL(CB).....	8.0	BL4.....	0.15	eBridge4CR.....	3.9
AL1024ULXB2.....	1.45	AL400ULXPD16(CB).....	11.2	ALTV244ULX(CBX).....	9.9	BL6.....	0.2	eBridge4PCRX.....	1.7
AL1024ULXPD4(CB).....	11.4	AL400ULX.....	8.75	ALTV244WP(CB).....	13.2	BNC24J.....	0.15	eBridge4SK.....	3.9
AL1024ULXPD8(CB).....	11.45	AL400ULXB2.....	0.8	ALTV248UL(CB).....	8.4	BT124.....	2.8	eBridge400PCRM.....	1.7
AL1024ULXPD16(CB).....	11.65	AL600UL3.....	8.8	ALTV248ULHi(CBHi).....	18.65	BT126.....	4.65	eBridge8PCRX.....	7.8
AL1042ULADA.....	19.15	AL600UL3X.....	11.1	ALTV248UL(CB).....	12.1	BT1212.....	8.75	eBridge16CR.....	7.47
AL125UL.....	5.6	AL600ULACM(CB).....	11.5	ALTV248ULM(CBMi).....	13.05	BT1240.....	27.2	eBridge8E/800E.....	8.0
AL125ULB.....	0.35	AL600ULB.....	1.25	ALTV248ULX(CBX).....	10.9	CAB4.....	3.0	eBridge800PCRM.....	7.8
AL125ULE.....	3.8	AL600ULM.....	9.2	ALTV248175UL(CB).....	13.3	CLIP1.....	0.15	eBridge16PCRX.....	9.2
AL125ULP.....	6.8	AL600ULPD4(CB).....	9.15	ALTV248300UL(CB).....	12.1	D10.....	0.15	eBridge1600PCRM.....	9.2
AL125ULX.....	10.4	AL600ULPD8(CB).....	9.2	ALTV248600UL(CB).....	25.25	DK1.....	0.13	eFlow3N.....	7.2
AL168300CB.....	18.1	AL600ULXPD16(CB).....	11.35	ALTV615DC1016(CB).....	16.2	DL1.....	0.15	eFlow3NB.....	0.8
AL168300CBM.....	9.2	AL600ULX.....	8.9	ALTV615DC4UL.....	3.9	DL3.....	0.15	eFlow3N4(D).....	7.35
AL168600CB.....	26.1	AL600ULXB.....	0.95	ALTV615DC416UL(CB).....	12.25	DP4(CB).....	0.3	eFlow4N.....	7.45
AL175UL.....	5.6	AL600ULXD.....	13.9	ALTV615DC616UL(CB).....	15.85	DPS1.....	0.3	eFlow4NB.....	1.0
AL175ULB.....	0.5	AL602ULADA.....	12.3	ALTV615DC8UL(CB).....	12.0	DPS3.....	0.5	eFlow4N8(D).....	7.6
AL175ULX.....	9.4	AL624.....	0.15	AT4.....	7.3	DPS5.....	0.5	eFlow4NA8(D).....	9.95
AL175ULX2.....	9.9	AL624E.....	4.1	AT4B.....	0.5	DPT724A.....	0.6	eFlow6N.....	7.4


PRODUCT SHIPPING WEIGHTS (APPROXIMATE LBS.)

Model #	Weight	Model #	Weight	Model #	Weight	Model #	Weight	Model #	Weight
eFlow6NB.....	0.95	HubWay8CD.....	12.3	LPS3WP24.....	14.0	NetWay4ESK.....	3.9	OLS180.....	1.1
eFlow6N8(D).....	7.55	HubWay8Di.....	12.3	LPSSC12X.....	12.4	NetWay4EWP.....	11.7	OLS20.....	0.35
eFlow6NA8(D).....	9.9	HubWay82CD.....	13.0	LPSSC24X.....	12.3	NetWay4EWPX.....	17.5	OLS200.....	1.04
eFlow102N.....	7.45	HubWay82Di.....	13.0	Maximal1R(D).....	12.7	NetWay4EX.....	7.55	OLS250.....	1.04
eFlow102NB.....	1.0	HubWay83CD.....	13.5	Maximal1RH(D).....	12.7	NetWay8.....	9.4	OLS300.....	1.4
eFlow102N8(D).....	7.6	HubWay83Di.....	13.5	Maximal3F(D).....	38.8	NetWay8G.....	7.5	OLS350.....	1.4
eFlow102N16(D).....	7.75	HubWay82CDS.....	12.4	Maximal33R(D).....	14.3	NetWay8M.....	9.4	OLS75.....	0.85
eFlow102NA8(D).....	9.95	HubWay83CDS.....	12.9	Maximal3R(D).....	12.7	NetWay16.....	10.2	Pace1PRMT.....	1.0
eFlow104N.....	7.7	HubWay8CDS.....	11.7	Maximal3RH(D).....	12.85	NetWay16M.....	10.2	Pace1PRD.....	0.42
eFlow104NB.....	1.25	HubWayAv.....	0.15	Maximal5F(D).....	38.9	NetWaySP1A.....	0.3	Pace4PRM.....	1.7
eFlow104N8(D).....	7.85	HubWayAv2.....	0.15	Maximal7F(D).....	39.0	NetWaySP1P.....	0.3	Pace8PRM.....	7.8
eFlow104N16(D).....	8.0	HubWayAv2Pk.....	1.5	Maximal11F(D).....	39.4	NetWaySP2P.....	0.3	Pace16PRM.....	9.2
eFlow104NA8(D).....	10.2	HubWayAvP.....	0.15	Maximal33F(D).....	39.6	NetWaySP3B.....	0.75	PD4(CB).....	0.25
Entrada2DMK.....	0.8	HubWayAvPk.....	1.25	Maximal55F(D).....	39.5	NetWaySP3PL.....	4.0	PD4UL(CB).....	0.25
Entrada2DMT.....	0.42	HubWayDv.....	0.15	Maximal75F(D).....	39.6	NetWaySP3WP.....	11.7	PD8(CB).....	0.3
FireSwitch108.....	13.7	HubWayDvi.....	0.15	Maximal77F(D).....	39.6	NetWaySP3WPN.....	10.0	PD8UL(CB).....	0.3
Fuse1.....	0.25	HubWayDvPk.....	1.25	Maximal11FE.....	38.3	NetWaySP3WPX.....	17.5	PD16W.....	0.5
Fuse2.....	0.25	HubWayEX1.....	0.3	Maximal13FE.....	38.3	NetWaySP3X.....	7.55	PDS8(CB).....	0.5
Fuse3.....	0.25	HubWayEX16.....	10.0	Maximal33FE.....	38.3	NetWaySP4.....	4.7	PM212.....	0.3
Fuse4.....	0.25	HubWayEX16S.....	10.0	Maximal35FE.....	38.4	NetWaySP4B.....	0.75	PM224.....	0.3
Fuse5.....	0.25	HubWayEX16SP.....	10.0	Maximal37FE.....	38.7	NetWaySP4P.....	6.0	PMK1.....	3.2
Fuse6.....	0.25	HubWayEX32.....	10.0	Maximal55FE.....	38.4	NetWaySP4PL.....	4.0	PT2724.....	0.5
GB1.....	1.05	HubWayEXP.....	22.0	Maximal75FE.....	38.5	NetWaySP4WP.....	11.7	PT2724E.....	4.7
GL1.....	0.15	HubWayH16.....	3.8	Maximal77FE.....	38.7	NetWaySP4WPN.....	10.0	PT724A.....	0.5
HubSat4D.....	8.6	HubWayLD16Di.....	22.15	MOM5.....	0.4	NetWaySP4WPX.....	17.5	PT724AE.....	4.7
HubSat42D.....	9.2	HubWayLDH8.....	8.5	MOM5C.....	4.8	NetWaySP4X.....	7.55	R1224DC16CB.....	17.3
HubSat43D.....	9.2	HubWayLDH16.....	11.05	NetWay1.....	0.3	NetWaySP8B.....	0.75	R2416UL(CB).....	17.15
HubSat8D.....	14.6	LC1.....	1.0	NetWay1D.....	3.2	NetWaySP8PL.....	4.0	R2416UL(CB).....	25.4
HubSat82D.....	15.9	LC2.....	1.0	NetWay1X.....	0.3	NetWaySP8WP.....	11.7	R2416300UL(CB).....	18.2
HubSat83D.....	15.9	LINQ2.....	0.7	NetWay1E/EV.....	1.6	NetWaySP8WPN.....	10.0	R2416600UL(CB).....	24.0
HubWay162CD.....	21.15	LINQ8PD(CB).....	0.75	NetWay1P.....	3.45	NetWaySP8WPX.....	17.5	R248UL(CB).....	14.2
HubWay162Di.....	21.15	LPS3.....	1.8	NetWay1512.....	0.15	NetWaySP8X.....	7.55	R248UL(CB).....	18.2
HubWay163CD.....	22.15	LPS3AC.....	1.8	NetWay3012.....	0.25	NetWayXT.....	0.25	R2432300UL(CB).....	18.2
HubWay163Di.....	22.15	LPS3C12X.....	12.3	NetWay4EB.....	1.0	NetWayTX.....	0.25	R2432600UL(CB).....	24.0
HubWay16CD.....	19.75	LPS3C24X.....	16.0	NetWay4EPL.....	4.0	OLS120.....	0.9	R615DC416UL(CB).....	14.75
HubWay16Di.....	19.75	LPS3WP12.....	14.0	NetWay4ES.....	1.7	OLS120D2.....	0.9	R615DC616UL(CB).....	18.15

PRODUCT SHIPPING WEIGHTS (APPROXIMATE LBS.)

Model #	Weight	Model #	Weight	Model #	Weight	Model #	Weight	Model #	Weight
R615DC8UL(CB)	13.4	SMP10C24X	12.15	T2856	2.1	Trove2DM2	40.85	VR1T	0.15
R615DC1016(CB)	18.15	SMP10PM	0.7	T2856C	4.9	Trove2HN2	40.85	VR2T	0.15
RAC120	0.15	SMP10PMC12X	9.3	T2885D	3.0	Trove2HW2	40.85	VR3T	0.15
RAC24	0.15	SMP10PMC24X	9.3	TAM2	10.0	Trove2KA2	40.85	VR4T	0.15
RB1224	0.25	SMP3	0.35	TAPE1	0.4	Trove2KH2	40.85	VR5BT	0.15
RB30	0.15	SMP3E	3.8	Tempo2	1.25	Trove2M2	40.85	VR5T	0.15
RB5	0.15	SMP312C	4.75	TBH2	10.0	Trove2SH2	40.85	VR6	0.4
RB5-24	0.15	SMP312CX	10.1	TC1	4.3	Trove2V2	40.85	WayPoint1 0A	13.0
RB610	0.7	SMP3PM	0.5	TCV2	10.0	Trove2Z2	40.85	WayPoint1 0ADU	11.7
RB7	0.25	SMP3PMCTX	7.9	TDM1	4.3	Trove3	58.5	WayPoint1 7AU	15.15
RB0C7	0.15	SMP5	0.45	TDM2	10.0	Trove3M3	73.5	WayPoint1 7ADU	14.22
RBRI224	0.25	SMP5PM	0.6	THN2	10.0	Trove3SH3	73.5	WayPoint1 7A4(D)U	14.22
RBSN	0.25	SMP5PMCTX	9.2	THW2	10.0	TSH2	10.0	WayPoint3	10.5
RBSN-TTL	0.25	SMP7	0.7	TKA2	10.0	TSH3	18.0	WayPoint30A	16.75
RBST	0.25	SMP7CTX	9.3	TKH2	10.0	TV1	4.3	WayPoint30ADU	16.75
RBTUL	0.25	SMP7PM	0.7	TM1	4.3	TV2	10.0	WayPoint30A4(D)U	16.75
RBUL	0.25	SMP7PMCTX	9.3	TM2	10.0	TZ2	10.0	WayPoint30A8(D)U	17.1
RDC12	0.15	SPACER1	0.15	TM3	18.0	VB1	0.15	WayPoint307A	16.75
RDC24	0.15	ST1	0.15	TM400	9.1	VB1T	0.15	WayPoint5	10.5
RDC48	0.15	ST2	0.15	TMV2	9.0	VertiLine16C(D)	13.45	WayPoint7/V	10.5
RE2	12.9	ST3	0.15	TP1220	1.15	VertiLine166C(D)	16.75	WG1	0.05
ReServ1	11.26	Strikelt1	7.15	TP1620	1.15	VertiLine16i(Di)	13.45	WM25	0.5
ReServ1WP	23.0	Strikelt2	5.45	TP1640	1.55	VertiLine24C(D)	19.05	WP1	10.0
ReServ2	11.26	T12100	3.0	TP1650	1.55	VertiLine3D	8.05	WP2	18.0
ReServ2WP	21.0	T16100	3.0	TP2420	1.15	VertiLine33D	8.3	WP3	8.3
ReServ3	11.26	T1656	2.5	TP2440	1.55	VertiLine33TD	9.05	WP4	2.6
ReServ3WP	23.0	T24130D	3.3	TP2450	1.55	VertiLine563	8.3	WPTV244175UL(CB)	16.4
ReServ4WP	23.0	T24130CP220	7.0	Trove1	12.9	VertiLine6D	9.3	WPTV244300UL(CB)	19.4
Sav4D	4.6	T2428175	8.05	Trove1C1	18.80	VertiLine63D	8.8	WPTV248UL(CB)	13.4
Sav9D	5.1	T2428175C	9.1	Trove1M1	18.80	VertiLine63TD	8.8	WPTV248175UL(CB)	16.4
Sav18D	5.3	T2428100	8.05	Trove1V1	18.80	VertiLine8C (D)	6.55	WPTV248300UL(CB)	19.5
Sav182D	8.7	T2428100C	8.35	Trove2	32.5	VertiLine83C(D)	9.30		
Sav36D	8.25	T2428300	8.1	Trove2AM2	40.85	VertiLine8i(Di)	9.30		
SMP10	0.7	T2428300E	13.15	Trove2BH2	40.85	VertiLine246C(D)	21.0		
SMP10C12X	9.3	T28140D	5.4	Trove2CV2	40.85	VR1	0.15		

ALTRONIX U.S. MANUFACTURERS REPS.

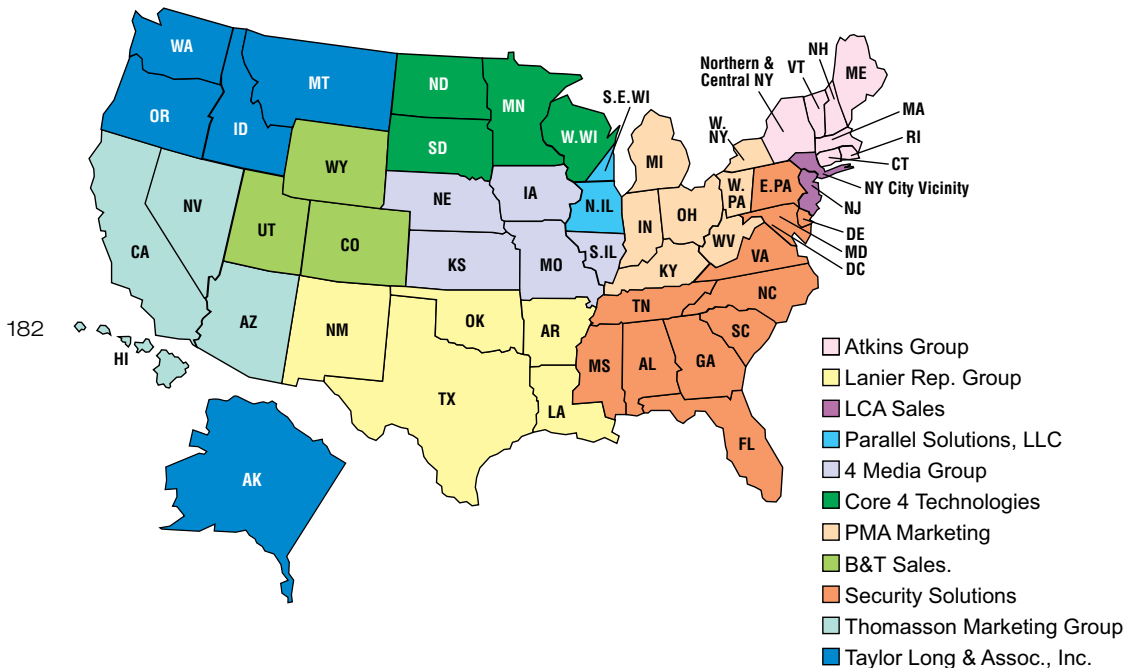

ALTRONIX MANUFACTURERS REPS.

Altronix Corp. Headquarters

140 58th Street Brooklyn, NY 11220 • Toll-free (US & Canada): 888-258-7669 • 718-567-8181 • Fax: 718-567-9056
altronix.com • email: info@altronix.com

4 Media Group

IA, Southern IL, KS, MO, NE
314-406-9613 • 4mediagroup.com

The Atkins Group

CT, MA, ME, NH, RI, VT, Northern & Central NY
603-508-7311 • theatkinsgrp.com

B&T Sales Reps

CO, UT, WY
303-565-6021 • btsalesrep.com

Core 4 Technologies

MN, ND, SD, W. WI
888-551-9209 • core4technologies.com

Lanier Representation Group (LRG, Inc.)

AR, LA, NM, OK, TX
409-384-4560 • lanrepgroup.com

LCA Sales

NJ, NY - NY City, Rockland & Westchester
800-522-7377 • lcasales.com

Parallel Solutions, LLC

Northern IL, South East WI
224-353-6801 • parallel-solutions.com

PMA Marketing, Inc.

IN, KY, MI, OH, Western NY & PA, WV
440-914-0536 • pmamarketinginc.com

Security Solutions

AL, DC, DE, FL, GA, MD, MS, NC, Eastern PA, SC, TN, VA
770-887-2844 • 4ademo.com

Thomasson Marketing Group

AZ, CA, HI, NV
909-613-0456 • thomassonmarketgroup.com

Taylor Long & Associates, Inc.

AK, ID, MT, OR, WA
360-892-8300 • taylorlong.com

International Reps.

PLG Security Systems

Canada
450-434-2992 • plgsecurity.com

Latin America Rep Group (LAR)

Mexico, Caribbean, Latin America and Puerto Rico
210-698-7912 • larepgroup.com

LIFETIME WARRANTY

Altronix Corporation warrants to the original purchaser that all products shall be free from defects in material or workmanship at time of shipment. Our obligation under this warranty is limited to the repair or replacement of any of our products, providing said products are used within the specified ratings and applied in accordance with good engineering practice, and providing said products are proved by our examination to be defective and returned to us transportation prepaid. This warranty shall constitute the fulfillment of Altronix's liability, and Altronix shall not be liable for any consequential damage. This warranty does not extend to any of our products which have been subject to misuse, neglect, accident, improper application or installation, nor shall it extend to material which has been altered or repaired outside the factory. This warranty is in lieu of all other warranties expressed or implied. Enclosures, batteries and transformers are not covered under this warranty.

184

Note: Altronix reserves the right to make changes to any products without prior notice in order to improve reliability, function, design, or accuracy.

MADE IN THE U.S.A.

Altronix products are proudly designed and manufactured in the U.S.A.

Altronix will modify, custom design and manufacture products to meet your specifications. Please contact us for a quote.

For detailed specifications on the complete line of Altronix products, please visit our website: altronix.com.

PRODUCT INDEX

Model #	Page(s)	Model #	Page(s)	Model #	Page(s)	Model #	Page(s)	Model #	Page(s)
6030	163	AL175ULX.	26	AL62412C	6	BC300	174	DPT724A	169
6062	163	AL175ULX2.	26	AL62412CX	6	BC300R	174	DTMR1	169
ACM4(CB)	28	AL176UL	22	AL62424C	6	BC400	174	eBridge1CR.	99
ACM4E(CBE)	28	AL176GULB	18	AL624E	6	BC400R	174	eBridge1CRT.	99
ACM8(CB)	29	AL176ULX.	22	AL642ULADA	84	BC400SG	174	eBridge1CT.	99
ACM8E(CBE)	29	AL201UL	22	AL802ULADA	83	BC400SR	174	eBridge1PCR.	97
ACMS8(CB)	45	AL300ULM	79	AL842ULADA	84	BC600	174	eBridge1PCRM	97
ACMS8K1/ACMS8CBK1	45	AL300ULPD4(CB)	70	ALSD1	17	BC600G	174	eBridge1PCRMT	95
AL1002ULADA	83	AL300ULPD8(CB)	70	ALSD2	17	BC800	174	eBridge1PCR.X	97
AL100UL.	22	AL300ULX.	70	ALTV1224C	136	BCS4G	175	eBridge1PCRT.	95
AL1012ULACM(CB)	30	AL300ULXB2	19	ALTV1224C4	136	BCS4R	175	eBridge1PCRTX.	95
AL1012ULM	27	AL300ULXD	70	ALTV2416300UL(CB)	133	BF3	176	eBridge1PCT.	97
AL1012ULX.	23	AL300ULXPD16(CB)	71	ALTV2416300ULM(CBM)	133	BF5	176	eBridge1PCTX.	90, 97
AL1012ULXB	19	AL400UL	72	ALTV2416600UL(CB)	133	BF10.	176	eBridge1ST.	90, 97
AL1012ULXPD16(CB)	24	AL400UL3.	61	ALTV2416ULi(CB)	135	BF15.	176	eBridge1STR.	95
AL1012ULXPD4(CB)	23	AL400UL3X.	61	ALTV2416ULX(CBX)	133	BL2	177	eBridge1OORM	92
AL1012ULXPD8(CB)	23	AL400ULACM(CB)	30	ALTV2432300UL(CB)	134	BL3.	56, 177	eBridge1OORMT	92
AL1024ULACM(CB)	30	AL400ULB	18	ALTV2432600UL(CB)	134	BL3KSP	177	eBridge1OOSPR.	93, 100
AL1024ULM	79	AL400ULM	79	ALTV244175UL(CB)	130	BL4.	56, 177	eBridge1OOST.	91, 92
AL1024ULX.	76	AL400ULPD4(CB)	73	ALTV244UL(CB)	130	BL6	56, 177	eBridge1OOSTR.	92
AL1024ULXB2	19	AL400ULPD8(CB)	73	ALTV248175UL(CB)	131	BNC24J	177	eBridge1OOTM	91, 92
AL1024ULXPD16(CB)	77	AL400ULX.	72	ALTV248300UL(CB)	131	BT1212	56, 176	eBridge16CTR.	99
AL1024ULXPD4(CB)	76	AL400ULXB2	19	ALTV248300ULM(CBM)	132	BT124	176	eBridge16PCR.X	98
AL1024ULXPD8(CB)	76	AL400ULXPD16(CB)	73	ALTV248600UL(CB)	132	BT1240	176	eBridge1600PCRM	92
AL1042ULADA	84	AL600UL3.	61	ALTV2488UL(CB)	131	BT126	56, 176	eBridge200WPM(H)	93
AL125UL.	25	AL600UL3X.	61	ALTV248ULHi(CBHi)	135	CAB4	174	eBridge4CR.	99
AL125ULB	18	AL600ULACM(CB)	30	ALTV248ULM(CBM)	135	CAM1	177	eBridge4PCR.X	98
AL125ULE.	25	AL600ULB	18	ALTV615DC4UL	137	CLIP1	177	eBridge4SK.	100
AL125ULP.	25	AL600ULM	79	ALTV615DC416UL(CB)	138	CP1	177	eBridge4SPT.	100
AL125ULX.	25	AL600ULPD4(CB)	75	ALTV615DC616UL(CB)	138	D10	177	eBridge400PCRM	92
AL168CB	60	AL600ULPD8(CB)	75	ALTV615DC1016(CB)	140	DK1	177	eBridge800E.	91
AL168175CB	60	AL600ULX.	74	ALTV615DC8UL(CB)	137	DL1	164	eBridge800PCRM	92
AL168300CB	60	AL600ULXB	19	AT4.	162	DL3	164	eBridge8E.	90
AL168300CBM.	60	AL600ULXD	74	AT4B	162	DP4(CB)	168	eBridge8PCR.X	98
AL168600CB	60	AL600ULXPD16(CB)	75	BC100	174	DPS1	168	eFlow3N	63
AL175UL.	26	AL602ULADA	83	BC1240	174	DPS3	168	eFlow3NB	20
AL175ULB	18	AL624.	6	BC200	174	DPS5	168	eFlow3N4(D)	63

PRODUCT INDEX

Model #	Page(s)	Model #	Page(s)	Model #	Page(s)	Model #	Page(s)	Model #	Page(s)
eFlow4N	64	HubWay8CD	120	Maximal3RH	42	NetWay8G	113	P1MM	103
eFlow4NB	20	HubWay8D	120	Maximal5F(D)	38	NetWay8M	114	P1SM10	103
eFlow4N8(D)	64	HubWay8Di	120	Maximal7F(D)	38	NetWaySP1A	105	Pace1PRD	93
eFlow4NA8(D)	36	HubWayAv2	129	Maximal11F(D)	38	NetWaySP1P	106	Pace1PRM	93
eFlow6N	65	HubWayAv2Pk	129	Maximal33F(D)	38	NetWaySP2P	106	Pace1PRMT	86
eFlow6NB	20	HubWayDv	129	Maximal55F(D)	38	NetWaySP3B	107	Pace1PTM	88
eFlow6N8(D)	65	HubWayDvi	129	Maximal75F(D)	38	NetWaySP3PL	107	Pace1ST	88
eFlow6N16(D)	66	HubWayDviPk	129	Maximal77F(D)	38	NetWaySP3WP	107	Pace1STR	86
eFlow6NA8(D)	36	HubWayDvPk	129	Maximal11FE	40	NetWaySP3WPN	107	Pace4PRM	88
eFlow102N	66	HubWayEX1	123	Maximal13FE	40	NetWaySP3WPX	107	Pace8PRM	88
eFlow102NB	21	HubWayEX16	124	Maximal33FE	40	NetWaySP3X	107	Pace16PRM	88
eFlow102N8(D)	67	HubWayEX16S	122	Maximal35FE	40	NetWaySP4	103	PD16W(CB)	170
eFlow102N16(D)	67	HubWayEX16SP	122	Maximal37FE	40	NetWaySP4B	110	PD4(CB)	171
eFlow102NA8(D)	36	HubWayEX32	124	Maximal55FE	40	NetWaySP4P	103	PD4UL(CB)	170
eFlow104N	68	HubWayEXP	125	Maximal75FE	40	NetWaySP4P2	103	PD8(CB)	171
eFlow104NB	21	HubWayLD16Di	126	Maximal77FE	40	NetWaySP4PL	110	PD8UL(CB)	170
eFlow104NK1	68	HubWayLDH16	127	MOM5	78	NetWaySP4WP	110	PDS8(CB)	44
eFlow104N8(D)	69	HubWayLDH8	127	MOM5C	78	NetWaySP4WPN	110	PDS8K1/PDS8CBK1	44
eFlow104N16(D)	69	LB2032	176	NetWay1 / NetWay112	116	NetWaySP4WPX	110	PM212	8
eFlow104NA8(D)	36	LC1	177	NetWay1512	117	NetWaySP4X	110	PM224	8
Entrada2DMK	80	LC2	177	NetWay16	115	NetWaySP8B	111	PMK1	149, 175
Entrada2DMT	80	LINQ2	34	NetWay16M	114	NetWaySP8PL	111	PT2724	162
FireSwitch108	82	LINQ8PD(CB)	33	NetWay1D	93, 118	NetWaySP8WP	111	PT2724E	162
FUSE1	176	LPD	16	NetWay1DWP	116	NetWaySP8WPN	111	PT724A	162
FUSE2	176	LPS3	7	NetWay1X	116	NetWaySP8WPX	111	PT724AE	162
FUSE3	176	LPS3AC	8	NetWay1E/EV	118	NetWaySP8X	111	R1224DC16CB	159
FUSE4	176	LPS3C12X	7	NetWay1P	116	NetWayXT	117	R2416300UL(CB)	155
FUSE5	176	LPS3C24X	7	NetWay3012	117	NetWayXTX	117	R2416600UL(CB)	156
FUSE6	176	LPS3WP12	7	NetWay4EB	108	OLS120	13	R2416UL(CB)	155
GB1	48, 56	LPS3WP24	7	NetWay4EPL	108	OLS120D2	14	R2416UL(CB)	157
GL1	177	LPS5C12X	7	NetWay4ESK	119	OLS120D2X	14	R2432300UL(CB)	156
HubSat4D	128	LPS5C24X	7	NetWay4EWP	108	OLS180(220)	13	R2432600UL(CB)	156
HubSat4WP	128	Maximal1RH	42	NetWay4EWPX	108	OLS20	13	R248UL(CB)	155
HubSat8D	128	Maximal1R	42	NetWay4EWPX	108	OLS200(220)	13	R248UL(CB)	155
HubWay16CD	121	Maximal3F(D)	38	NetWay4EX	108	OLS250(220)	13	R615DC416UL(CB)	158
HubWay16D	121	Maximal33R	42	NetWay8	115	OLS350(220)	13	R615DC616UL(CB)	158
HubWay16Di	121	Maximal3R	42	NetWay8E	112	OLS75	13	R615DC8UL(CB)	158

PRODUCT INDEX

Model #	Page(s)	Model #	Page(s)	Model #	Page(s)	Model #	Page(s)	Model #	Page(s)
R615DC1016(CB)	159	SMP10PMC12X	12	TAPE1	177	Trove2M2	54	VR1TM5	15
RAC120	165	SMP10PMC24X	12	TB2H2	50	Trove2SH2	55	VR1T	15
RAC24	165	SMP3	9	TC1	47	Trove2SL2	55	VR2T	15
RB1224	166	SMP312C	9	TCV2	51	Trove2V2	52	VR3T	15
RB30	166	SMP312CX	9	TDM1	47	Trove2Z2	56	VR4T	15
RB5	166	SMP3E	9	TDM2	51	Trove3	46	VR5BT	15
RB524	166	SMP3PM	11	Tempo2	161	Trove3M3	57	VR5T	15
RB610	167	SMP3PMCTX	12	THN2	52	Trove3SH3	58	VR6	15, 44
RB7	167	SMP5	10	THW2	53	TSH2	55	WayPoint10A	146
RBOC7	167	SMP5PM	11	TKA2	54	TSH3	58	WayPoint10ADU	146
RBR1224	167	SMP5PMCTX	12	TKH2	53	TS2L	55	WayPoint104	148
RBSN	166	SMP7	10	TM1	49	TV1	48	WayPoint17AU	146
RBSNTTL	166	SMP7CTX	10	TM2	54	TV2	52	WayPoint17A4U(4DU)	146
RBST	166	SMP7PM	11	TM3	57	TZ2	56	WayPoint3	148
RBUL	165	SMP7PMCTX	12	TM400	49	VB1	16	WayPoint30A	147
RBUL	165	SPACER1	177	TMV2	52, 54	VB1T	16	WayPoint30A4U(4DU)	147
RDC12	165	ST1	177	TP1220	172	VertiLine16(D)	152	WayPoint30A8U(8DU)	147
RDC24	165	ST2	177	TP1620	172	VertiLine166(D)	152	WayPoint307A	147
RDC48	165	ST3	177	TP1640	172	VertiLine16C(D)	152	WayPoint5	148
RE2	176	Strikelt1	59	TP1650	172	VertiLine166C(D)	152	WayPoint7/7V	148
ReServ1	141	Strikelt2	59	TP2420	172	VertiLine16i(Di)	152	WG1	175, 177
ReServ1WP	141	T16100	172	TP2440	172	VertiLine24(D)	153	WM25	56, 177
ReServ2	142	T1656	172	TP2450	172	VertiLine246(D)	153	WP1	175
ReServ2WP	142	T16175	172	Trove1	46	VertiLine24C(D)	153	WP2	175
ReServ3	142	T24130CP220	173	Trove1C1	47	VertiLine246C(D)	153	WP3	175
ReServ3WP	142	T24130D	172	Trove1DM1	47	VertiLine3D	154	WP4	175
ReServ4WP	142	T2428100	172	Trove1M1	49	VertiLine33D	154	WPL1	177
RSB2	56	T2428100C(220)	173	Trove1V1	48	VertiLine33TD	154	WPTV244175UL	143
Sav18D	139	T2428175	172	Trove2	46	VertiLine563	101	WPTV244300UL	143
Sav182D	139	T2428175C(220)	173	Trove2AM2	50	VertiLine6D	154	WPTV248175UL(CB)	144
Sav36D	140	T2428300	172	Trove2BH2	50	VertiLine63D	154	WPTV248300UL(CB)	144
Sav4D	139	T2428300E	173	Trove2CV2	51	VertiLine63TD	154	WPTV248UL(CB)	144
Sav9D	139	T28140D	172	Trove2DM2	51	VertiLine8(D)	151		
SMP10	10	T2856	172	Trove2HN2	52	VertiLine83(D)	151		
SMP10C12X	10	T2856C	173	Trove2HW2	53	VertiLine83C(D)	151		
SMP10C24X	10	T2885D	172	Trove2KA2	54	VertiLine8C(D)	151		
SMP10PM	11	TAM2	50	Trove2KH2	53	VertiLine8i(D)	151		

Rev. 0318

PRODUCT GUIDE



Altronix[®]

140 58TH STREET / BROOKLYN, NY 11220

888.258.7669 / altronix.com
