

UNIVERSAL ENCLOSURE RANGE

Tailored for general purpose applications
Engineered by Elmdene



Providing solutions to universal compatibility

Benefits

- **Compatibility**
Compatible with *any* third-party device, including control boards, communicators and modules.
- **Tamper proof**
Provided with front and rear tampers as standard.
- **Ease of installation**
Third-party devices easily installed without drilling holes; all fixings supplied.
- **Versatile**
Available in medium and large variants to accommodate a range of device sizes (or multiple devices).

To discover more about Elmdene, or any of our product ranges, get in touch
sales@elmdene.co.uk



UNIVERSAL-ENC-M

Medium tampered enclosure with universal backplate
330H x 377W x 85D (mm)

UNIVERSAL-ENC-L

Large tampered enclosure with universal backplate
500H x 400W x 80D (mm)

UNIVERSAL-1224-L

Selectable 12V, 8A /24V, 4A, PSU in large tampered enclosure with universal backplate
500H x 400W x 80D (mm)

STEP 1:

CHOOSE THE ENCLOSURE

STEP 2:

CHOOSE THE POWER MODULE

OR:

CHOOSE THE ENCLOSURE WITH THE SELECTABLE 12/24V OPTION

UNIVERSAL ENCLOSURE FEATURES

- Compatible with all common third-party devices
- Front & rear tamper protection as standard
- Comes with all fixings for third-party device installation
- Available in two sizes
- Can be used in conjunction with Elmdene power modules
- Quick & simple installation
- Added flexibility for installer
- Powder coated white steel enclosure
- High energy efficient - reducing energy bills
- Mesh backplate assists airflow
- Lifetime warranty

UNIVERSAL-1224-L TECHNICAL SPECIFICATIONS

Output	13.8V dc / 27.6V dc
Mains Input	90V - 264V ac at 50 - 60Hz
Operating Temperature	-10°C to 40°C at 95% RH
Power Variant	13.8V dc 8A / 27.6V dc 4A


ORDERING INFORMATION




PART NO

DESCRIPTION

UNIVERSAL-ENC-M Medium tampered enclosure with universal backplate
H330 x W377 x D85 (mm)

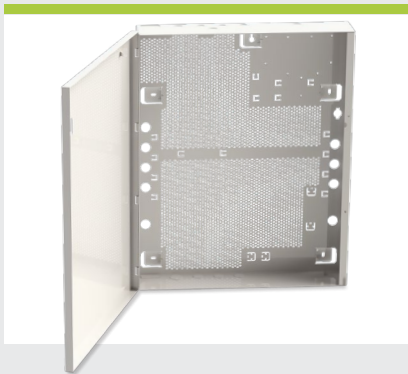

UNIVERSAL-ENC-L Large tampered enclosure with universal backplate
H500 x W400 x D80 (mm)

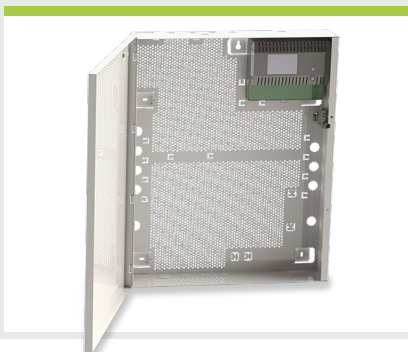

UNIVERSAL-1224-L Selectable 12V, 8A / 24V, 4A, PSU in large tampered enclosure with universal backplate
H500 x W400 x D80 (mm)